WAAS	APP CRS	Rwy Idg	3900
CH 53714	159°	TDZE	2160
W16A		Apt Elev	2160

RNAV (GPS) RWY 16

PIONEER VILLAGE FLD (ØV3)

T A NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Kearney altimeter setting; when not received, use Holdrege altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ¼ mile. Circling NA to Rwy 5/23.

MISSED APPROACH: Climb to 3700 direct MEDOC and hold.

EAR AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
123.875	119.4 278.8	122.7 (CTAF) L

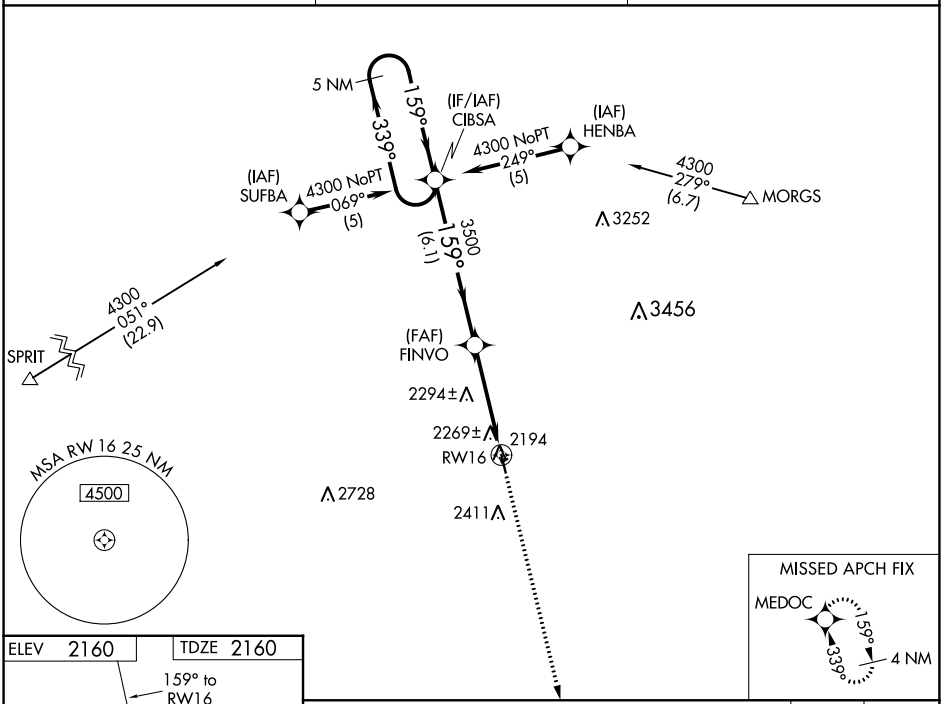

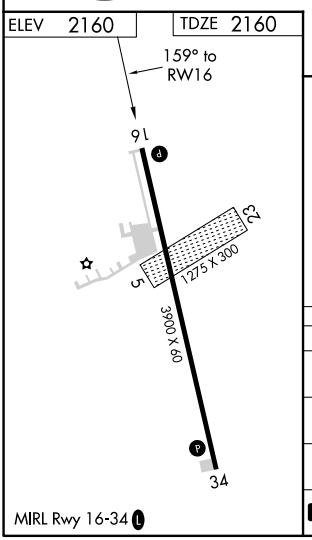

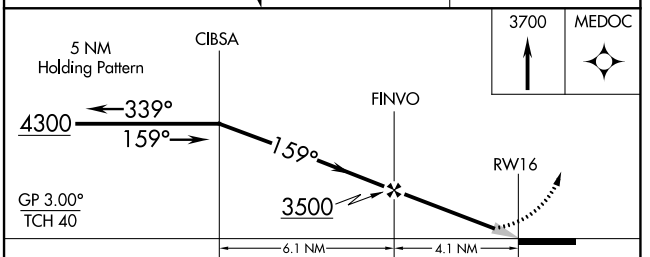

CATEGORY	A	B	C	D
LPV DA	2445-1	285 (300-1)	NA	
LNAV/VNAV DA	2574-1½	414 (500-1½)	NA	
LNAV MDA	2580-1	420 (500-1)	NA	
C CIRCLING	2680-1 520 (600-1)	2780-1 620 (700-1)	NA	

NC-2, 22 FEB 2024 to 21 MAR 2024
NC-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 34

PIONEER VILLAGE FLD (ØV3)

APP CRS	Rwy Idg	3900
339°	TDZE	2160
	Apt Elev	2160

RNP APCH.

T NA Rwy 34 helicopter visibility reduction below ¾ SM NA. Use Kearney altimeter setting; when not received, use Holdrege altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climb to 4300 direct CIBSA and hold.

EAR AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
123.875	119.4 278.8	122.7 (CTAF) L

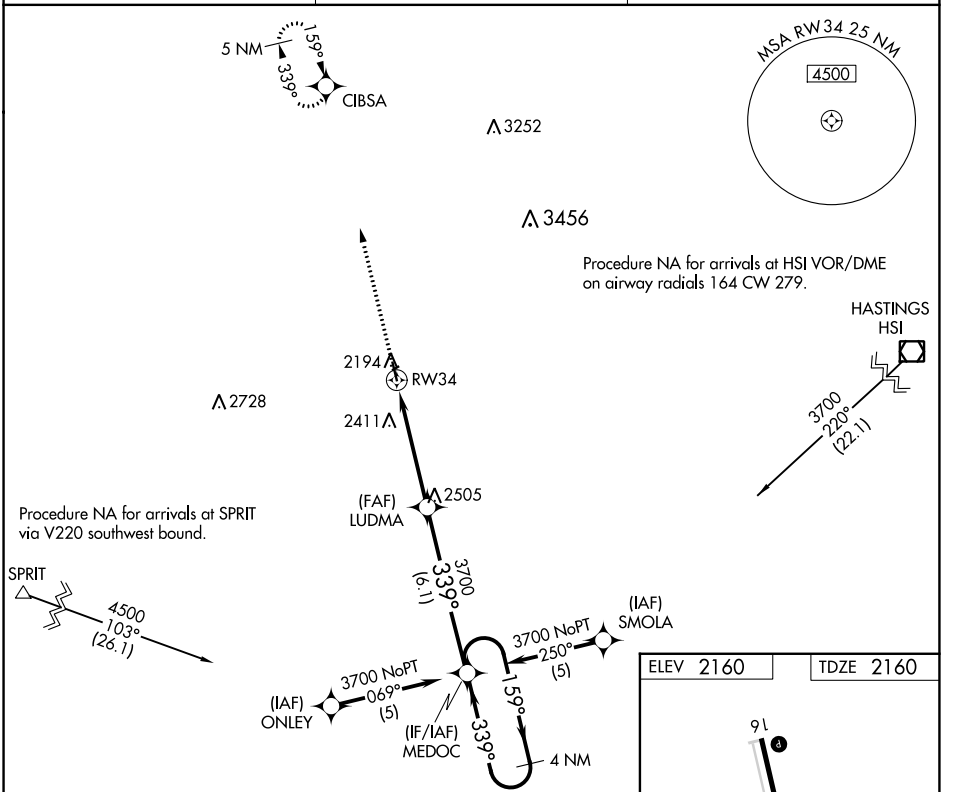

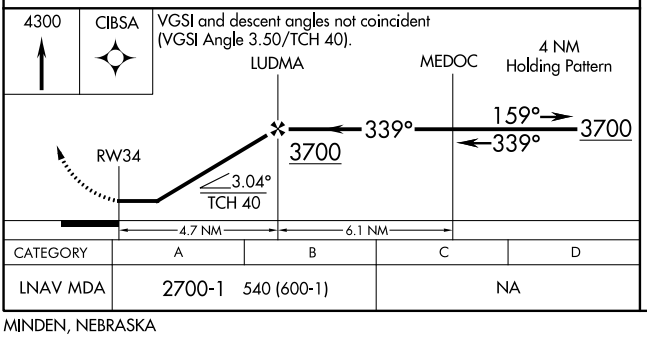

CATEGORY	A	B	C	D
LNAV MDA	2700-1 540 (600-1)		NA	

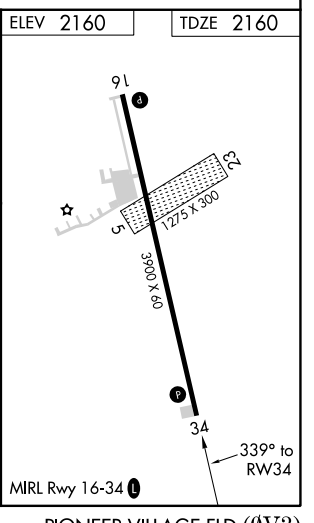

NC-2, 22 FEB 2024 to 21 MAR 2024
NC-2, 22 FEB 2024 to 21 MAR 2024