RNAV (GPS) RWY 17

GEORGE L SCOTT MUNI (3Y2)

WAAS	APP CRS		
CH **78238**	**174°**	Rwy Idg	**4149**
W17A		TDZE	**1232**
		Apt Elev	**1232**

RNP APCH.

T A NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decorah altimeter setting. Helicopter visibility reduction below ¾ SM NA. Obtain local altimeter setting on CTAF; when not received, use Decorah altimeter setting and increase LPV and LNAV/VNAV DA to 1533 all Cats, increase all MDA 60 feet, and LNAV Cat C visibility ⅛ mile.

MISSED APPROACH: Climb to 3200 direct KIRTS and hold.

MINNEAPOLIS CENTER	UNICOM
118.85	**122.8** (CTAF) L

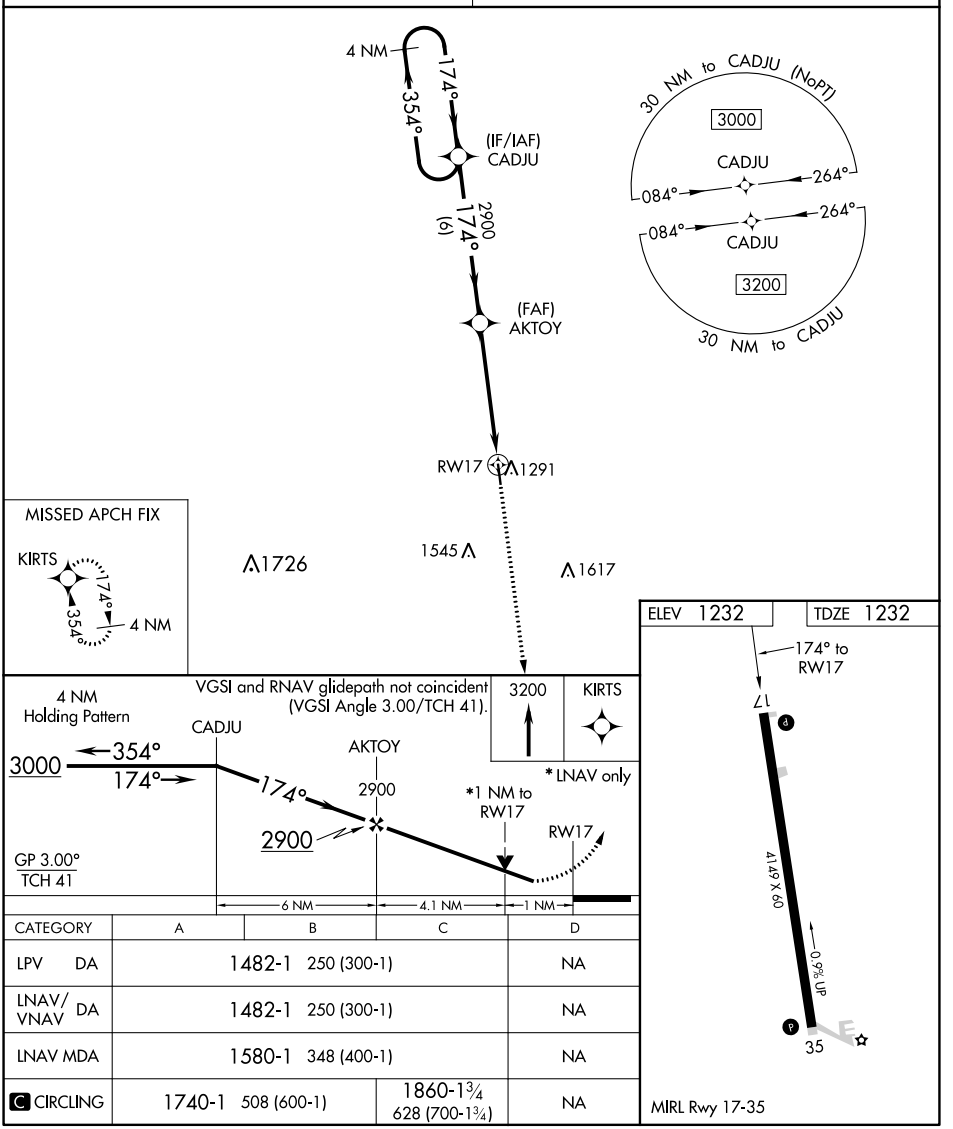

CATEGORY	A	B	C	D
LPV DA	1482-1	250 (300-1)		NA
LNAV/VNAV DA	1482-1	250 (300-1)		NA
LNAV MDA	1580-1	348 (400-1)		NA
C CIRCLING	1740-1	508 (600-1)	1860-1¾ 628 (700-1¾)	NA

NC-3, 22 FEB 2024 to 21 MAR 2024
NC-3, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 35

GEORGE L SCOTT MUNI (3Y2)

WAAS	APP CRS	Rwy Idg	4149
CH 82538	354°	TDZE	1223
W35A		Apt Elev	1232

RNP APCH.

T NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decorah altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Decorah altimeter setting and increase LPV DA to 1524 all Cats and all visibilities ⅛ mile, LNAV/VNAV DA to 1773 all Cats and all visibilities ⅛ mile; increase all MDA 60 feet and LNAV Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct CADJU and hold.

MINNEAPOLIS CENTER	UNICOM
118.85	122.8 (CTAF) L

MISSED APCH FIX



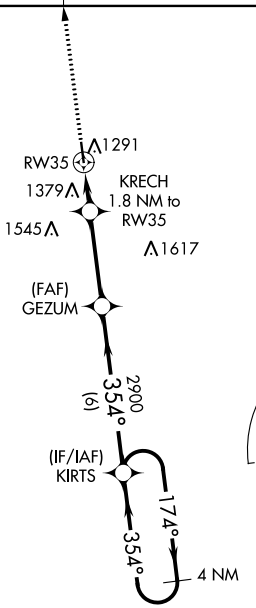



ELEV 1232 TDZE 1223



MIRL Rwy 17-35

2117

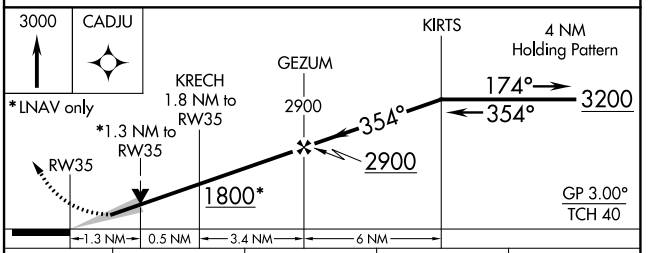

CATEGORY	A	B	C	D
LPV DA	1473-1 250 (300-1)			NA
LNAV/VNAV DA	1722-1⅞ 499 (500-1⅞)			NA
LNAV MDA	1640-1 417 (500-1)		1640-1⅛ 417 (500-1⅛)	NA
C CIRCLING	1740-1 508 (600-1)		1860-1¾ 628 (700-1¾)	NA

NC-3, 22 FEB 2024 to 21 MAR 2024
NC-3, 22 FEB 2024 to 21 MAR 2024