WAAS CH 69238 W23A	APP CRS 231°	Rwy ldg 4003 TDZE 964 Apt Elev 964

RNAV (GPS) RWY 23

SEARCY COUNTY (4A5)

NA

DME/DME RNP-0.3 NA. Procedure NA at night. Circling NA SE of Rwy 5-23. Baro-VNAV NA. Use Flippin altimeter setting; when not received, use Harrison altimeter setting and increase all Cats LPV DA to 1555 and visibility ⅛ mile, LNAV/VNAV all Cats DA to 2016, and all MDA 60 feet, LNAV Cat B/C and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 4000 direct MERLS and hold.

FLP AWOS-3	MEMPHIS CENTER	CTAF
132.075	126.85 281.55	122.9 L

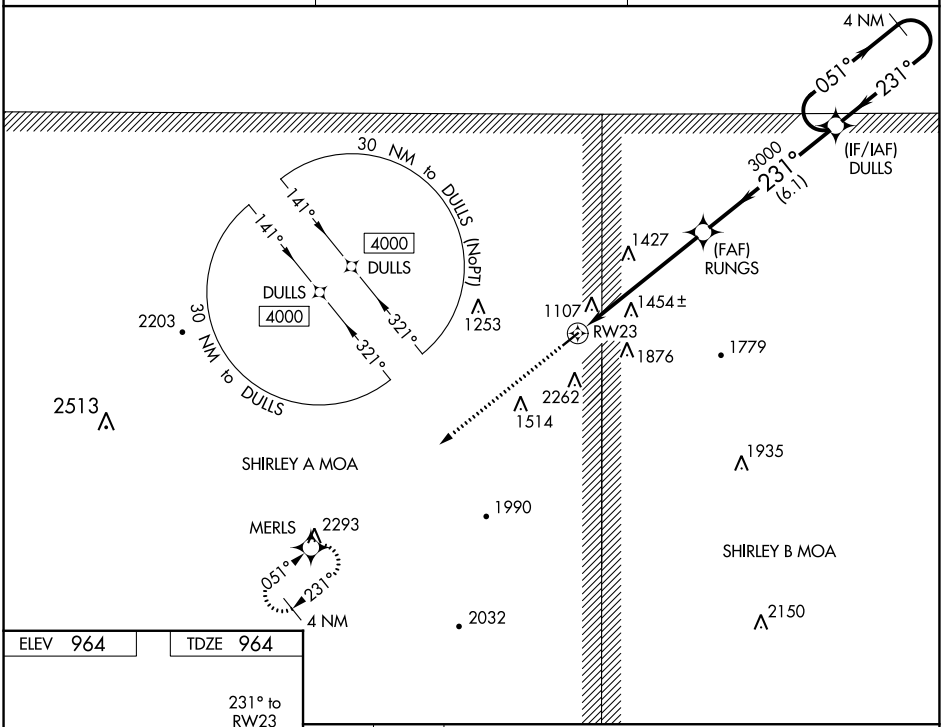

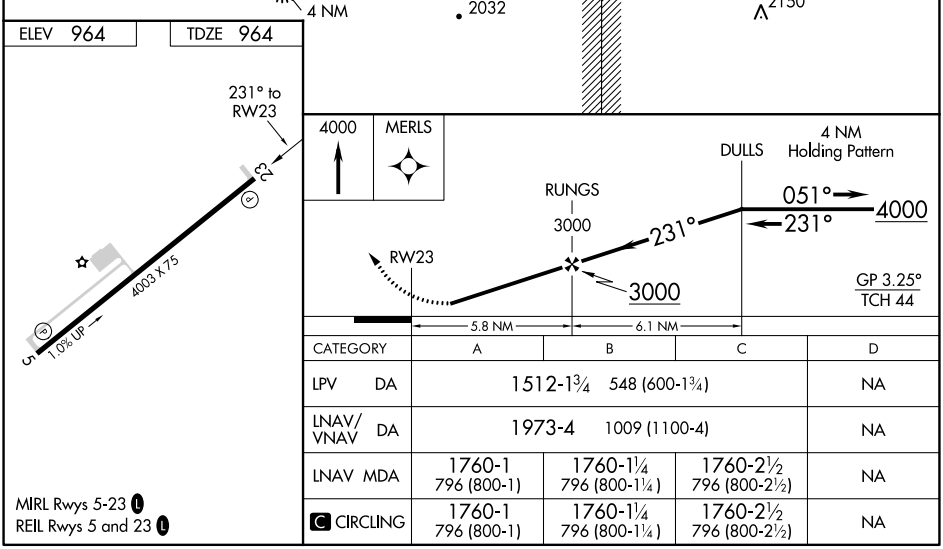

CATEGORY	A	B	C	D
LPV DA	1512-1¾ 548 (600-1¾)			NA
LNAV/VNAV DA	1973-4 1009 (1100-4)			NA
LNAV MDA	1760-1 796 (800-1)	1760-1¼ 796 (800-1¼)	1760-2½ 796 (800-2½)	NA
C CIRCLING	1760-1 796 (800-1)	1760-1¼ 796 (800-1¼)	1760-2½ 796 (800-2½)	NA

MIRL Rwys 5-23 L
REIL Rwys 5 and 23 L

SC-1, 22 FEB 2024 to 21 MAR 2024

SC-1, 22 FEB 2024 to 21 MAR 2024