WAAS	APP CRS	Rwy Idg	4001
CH 45922	175°	TDZE	532
W18A		Apt Elev	532

RNAV (GPS) RWY 18

LOCKHART MUNI (5ØR)

RNP APCH.

Baro-VNAV NA. Use San Marcos altimeter setting, when not received, use Austin-Bergstrom Intl altimeter setting and increase all DA 16 feet, all MDA 20 feet; increase LNAV Cat B visibility ¼ SM.

MISSED APPROACH: Climb to 4000 direct EDIVE and on track 095° to SEEDS and hold.

AUSTIN APP CON	UNICOM
120.875 270.25	122.8 (CTAF) L

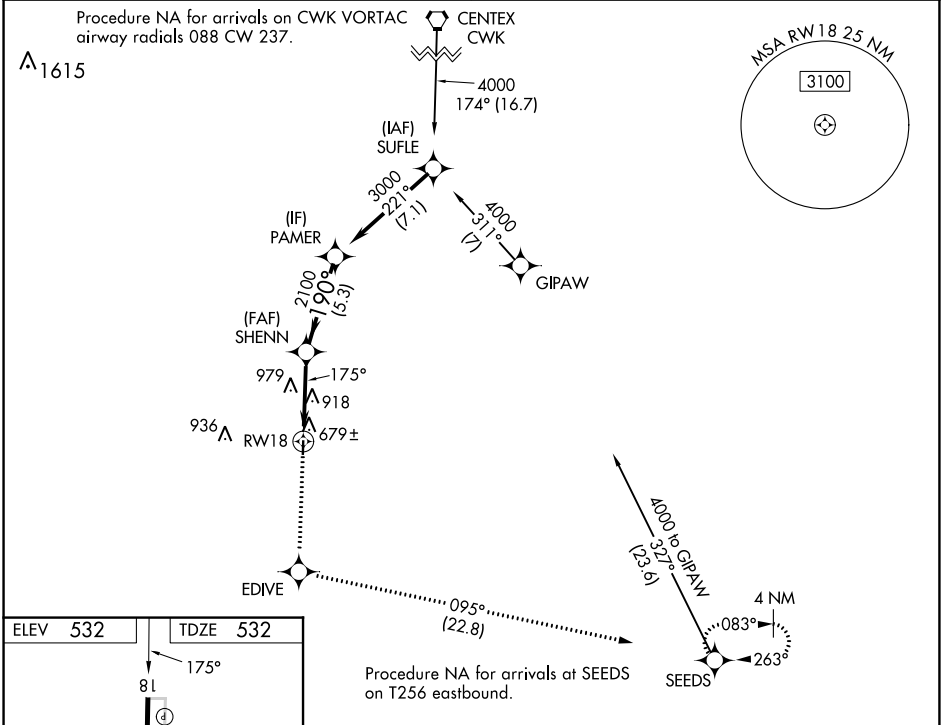

ELEV 532 TDZE 532

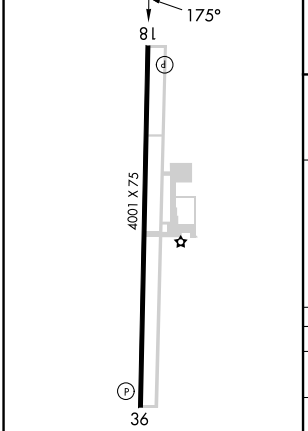

MIRL Rwy 18-36 L

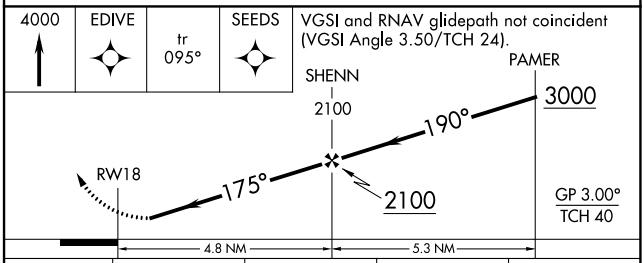

CATEGORY	A	B	C	D
LPV DA	815-1 283 (300-1)			NA
LNAV/VNAV DA	883-1¼ 351 (400-1¼)			NA
LNAV MDA	1260-1 728 (800-1)		1260-2 728 (800-2)	NA

SC-3, 22 FEB 2024 to 21 MAR 2024
SC-3, 22 FEB 2024 to 21 MAR 2024

WAAS	APP CRS	Rwy Idg	4001
CH 53323	355°	TDZE	530
W36A		Apt Elev	532

RNAV (GPS) RWY 36

LOCKHART MUNI (5ØR)

RNP APCH - GPS.

Rwy 36 helicopter visibilty reduction below ¾ NA. Baro-VNAV NA. Use San Marcos altimeter setting; when not received, use Austin-Bergstrom Intl altimeter setting: increase LPV DA to 830 feet; increase LNAV/VNAV DA to 880 feet; increase all MDAs 20 feet and visibility Cat C ⅛ SM.

MISSED APPROACH: Climb to 1000, then climbing right turn to 3000 direct CRAYS and hold.

AUSTIN APP CON	UNICOM
120.875 270.25	122.8 (CTAF)

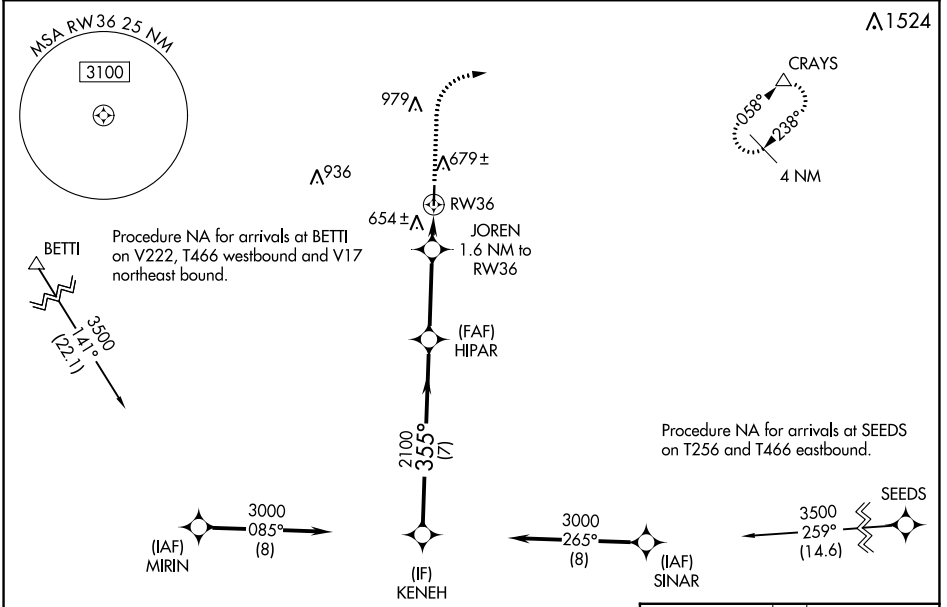

ELEV 532	TDZE 530

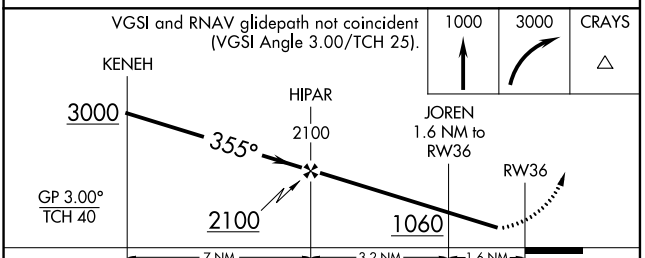

CATEGORY	A	B	C	D
LPV DA	813-1 283 (300-1)			NA
LNAV/VNAV DA	863-1⅛ 333 (400-1⅛)			NA
LNAV MDA	940-1 410 (500-1)		940-1⅛ 410 (500-1⅛)	NA

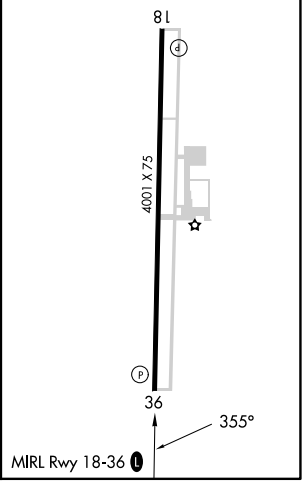

SC-3, 22 FEB 2024 to 21 MAR 2024
SC-3, 22 FEB 2024 to 21 MAR 2024