

WAAS CH 86539 W25A	APP CRS 253°	Rwy Idg TDZE Apt Elev	6501 5140 5176
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25

ROOSEVELT MUNI (74V)



⚠

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F). Baro-VNAV and VDP NA when using Vernal altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vernal altimeter setting: increase LPV DA to 5466 and visibility 1⁄8 SM, LNAV/VNAV DA to 5628 and visibility 1⁄4 SM; increase all MDAs 80 feet and LNAV visibility Cat C and D 1⁄8 SM and Circling Cat C visibility 1⁄4 SM.

MISSED APPROACH: Climb to 5700 then climbing left turn to 10500 direct IGEHU and hold, continue climb-in-hold to 10500.

AWOS-3P 118.975	SALT LAKE CENTER 135.77 257.7	UNICOM 122.8 (CTAF) ①
---------------------------	---	---------------------------------

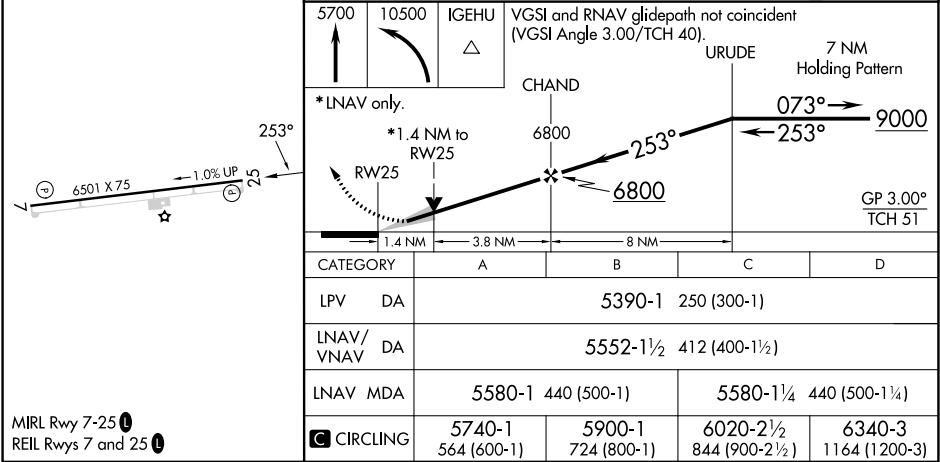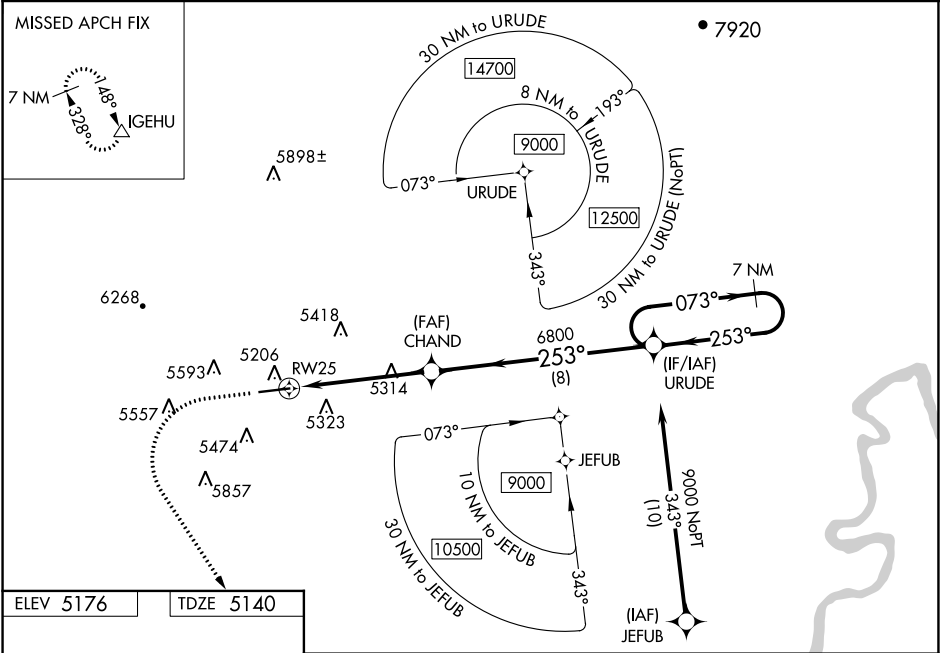

When local altimeter setting not received, use Vernal altimeter setting and increase all MDA 80 feet, FOSLA fix minimums, increase Cat C visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 9000 direct MTU VOR/DME and hold, continue climb-in-hold to 9000.

AWOS-3P 118.975	SALT LAKE CENTER 135.77 257.7	UNICOM 122.8 (CTAF) 0
--------------------	----------------------------------	--------------------------

One Minute Holding Pattern

8500

160°

340°

MTU VOR/DME

9000

MTU

FOSLA MTU 5.2

MARPK MTU 8.2

6280

010°

5.2 NM

3 NM

CATEGORY	A	B	C	D
CIRCLING	6280-1¼ 1104 (1200-1¼)	6280-1½ 1104 (1200-1½)	6280-3 1104 (1200-3)	6340-3 1164 (1200-3)
FOSLA FIX MINIMUMS				
CIRCLING	5760-1 584 (600-1)	5900-1 724 (800-1)	6020-2½ 844 (900-2½)	6340-3 1164 (1200-3)

ELEV 5176

6501 X 75

1.0% UP

25

010°

MIRL Rwy 7-25 0

REIL Rwy 7 and 25 0

Knots	60	90	120	150	180
	Min:Sec	8:12	5:28	4:06	3:17

ROOSEVELT, UTAH

Amtd 4 10NOV16

40°17'N-110°03'W

ROOSEVELT MUNI (74V)

VOR-A