

LOC I-AEG	APP CRS	Rwy Idg	7398
110.1	215°	TDZE	5817
		Apt Elev	5837

ILS or LOC RWY 22

DOUBLE EAGLE II (AEG)

⚠


NA

When local altimeter setting not received, use Albuquerque Intl Support altimeter setting and increase all DA 94 feet, increase all MDA 100 feet, and increase visibility S-LOC 22 Cats C/D ¼ mile, Circling Cats C/D ½ mile. For inop MALSR when using Albuquerque Intl Support altimeter setting, increase visibility S-ILS 22 all Cats ¾ mile.

MALSR

MISSED APPROACH: Climb to 6500 then climbing right turn 7700 direct DUDLE LOM and hold.

ATIS	ALBUQUERQUE APP CON	DOUBLE EAGLE II TOWER ★	GND CON	CLNC DEL
119.025	127.4 253.5	120.15 (CTAF) 0	121.625	124.8 (When twr closed)

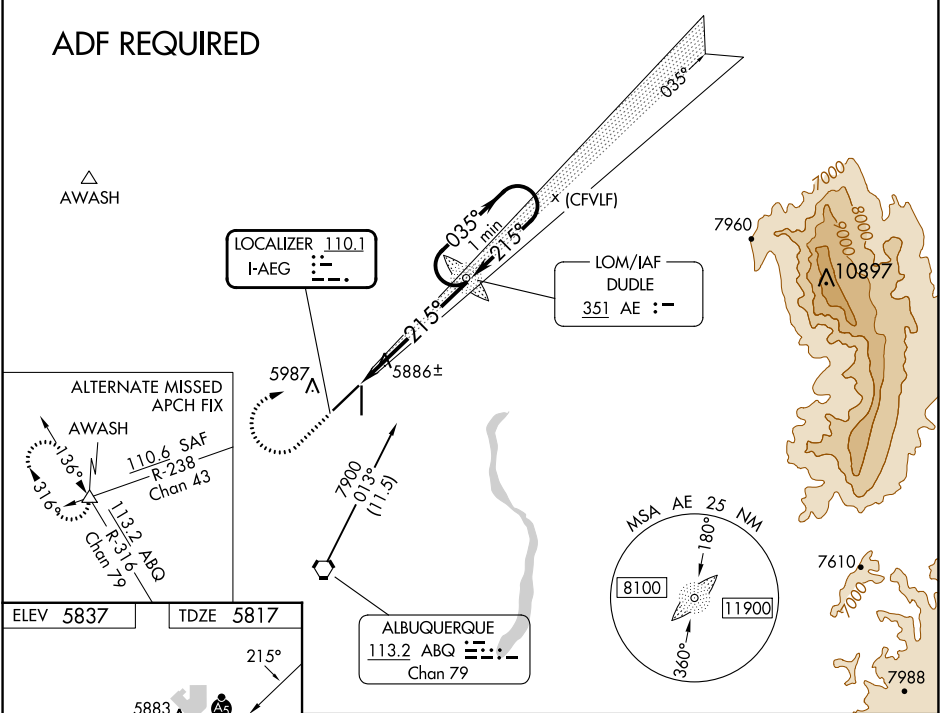

TWR 5922

0.4% UP

7398 X 100

5983 X 100

35

6500

↑

7700

↷

AE

AE LOM

7629

One Minute Holding Pattern

035°

215°

7700

GS 3.00°

TCH 55

5.5 NM

CATEGORY	A	B	C	D
S-ILS 22	6017-½ 200 (200-½)			
S-LOC 22	6140-½ 323 (400-½)			
CIRCLING	6400-1 563 (600-1)		6420-1½ 583 (600-1½)	6640-2½ 803 (900-2½)

REIL Rwy 17 and 35

MIRL Rwy 4-22 and 17-35

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SW-1, 22 FEB 2024 to 21 MAR 2024

SW-1, 22 FEB 2024 to 21 MAR 2024