


WAAS CH 56339 W04A	APP CRS 035°	Rwy Idg 7398 TDZE 5837 Apt Elev 5837
--	------------------------	---

RNAV (GPS) RWY 4
DOUBLE EAGLE II (A/E/G)


⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albuquerque Intl Sunport altimeter setting and increase LPV DA to 6131 feet and LNAV/VNAV DA to 6384 feet, increase all MDA 100 feet, and increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ¾ mile, LNAV visibility Cat C/D ¼ mile, and Circling visibility Cats C/D ½ mile. Baro-VNAV and VDP NA when using Albuquerque Intl Sunport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 46°C (114°F).

MISSED APPROACH: Climb to 6300 then climbing left turn to 8600 direct EYIPE and hold.

ATIS 119.025	ALBUQUERQUE APP CON 127.4 253.5	DOUBLE EAGLE II TOWER ★ 120.15 (CTAF) 0	GND CON 121.625	CLNC DEL 124.8 (When twr closed)
------------------------	---	---	---------------------------	---

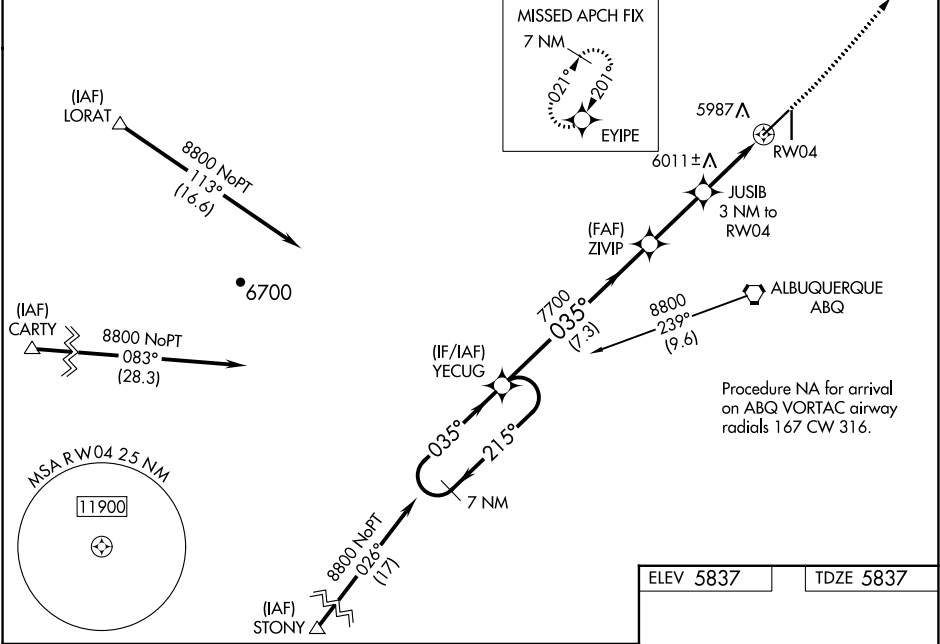

7 NM Holding Pattern		YECUG	ZIVIP	JUSIB	RW04
8800		7700	7700	6300	8600
GP 3.00° TCH 55		035°	035°	035°	EYIPE
7.3 NM		2.7 NM	1.7 NM	1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	6037-¾		200 (200-¾)		
LNAV/VNAV DA	6290-1½		453 (500-1½)		
LNAV MDA	6300-1	463 (500-1)	6300-1¾	463 (500-1¾)	
CIRCLING	6400-1	563 (600-1)	6420-1½ 583 (600-1½)	6640-2½ 803 (900-2½)	

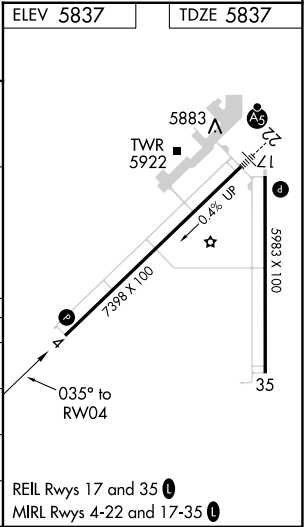

SW-1, 22 FEB 2024 to 21 MAR 2024

SW-1, 22 FEB 2024 to 21 MAR 2024