

LOC I-AMA 110.3	APP CRS 038°	Rwy Idg 13502 TDZE 3607 Apt Elev 3607
---------------------------	------------------------	--

ILS or LOC RWY 4

RICK HUSBAND AMARILLO INTL (AMA)


ADF or DME required.

When local altimeter setting not received, use Borger altimeter setting and increase S-ILS 4 DA to 3960 feet and all visibilities to RVR 3000. Increase all MDAs 160 feet and S-LOC 4 visibility Cat C/D/E to RVR 6000 and Circling visibility Cat C/D ½ SM. For inop ALS, increase visibility S-ILS 4 Cat E to 4000 RVR and S-LOC 4 Cat C/D/E to RVR 6000. For inop ALS when using Borger altimeter setting, increase visibility S-ILS 4 all Cats to 5500 and S-LOC 4 Cat C/D/E to 1½ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Borger altimeter setting).

MALSR

MISSED APPROACH: Climb to 4100 then climbing right turn to 5000 on PNH VORTAC R-118 to CAUDE/ PNH 13 DME and hold.

ATIS 118.85 350.3	AMARILLO APP CON* 119.5 307.0	AMARILLO TOWER* 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-----------------------------------	-------------------------

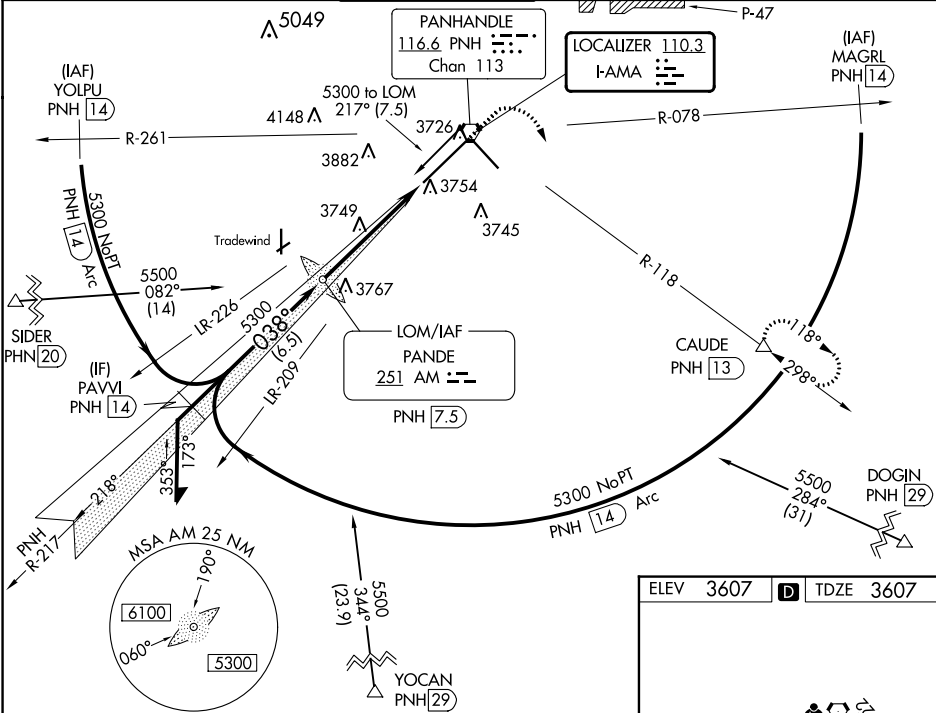

Procedure turn NA for Cat E.

Remain within 10 NM

AM LOM PANDE PNH 7.5

4100

5000

CAUDE

5300

038°

5282

5300

GS 3.00° TCH 55

5 NM

CATEGORY

A

B

C

D

E

S-ILS 4 *

3807/24

200 (200-½)

S-LOC 4

4000/24

393 (400-½)

4000/35

393 (400-¾)

4460-3

4080-1

473 (500-1)

4240-1¾

633 (700-1¾)

4280-2¼

673 (700-2¼)

853 (900-3)

CIRCLING

REIL Rwy 13

HIRL Rwy 4-22 and 13-31

FAF to MAP 5 NM

Knots

60

90

120

150

180

Min:Sec

5:00

3:20

2:30

2:00

1:40