

LOC/DME I-AVL	APP CRS	Rwy Idg TDZE	8001
110.5	347°	2141	2164
Chan 42		Apt Elev	

ILS or LOC RWY 35

ASHEVILLE RGNL (AVL)

▼


▲

Circling NA west of Rwy 17-35.

MALSR

MISSED APPROACH: Climb to 2700 then climbing right turn to 6800 on heading 020° and on SUG VORTAC R-313 to JUNOE INT/SUG 24.5 DME and hold, continue climb-in-hold to 6800.
* Missed approach requires minimum climb of 340 feet per NM to 4200.

ATIS	ASHEVILLE APP CON★	ASHEVILLE TOWER★	GND CON	UNICOM
120.2	124.65 351.8	121.1 (CTAF) 0 257.8	121.9	122.95

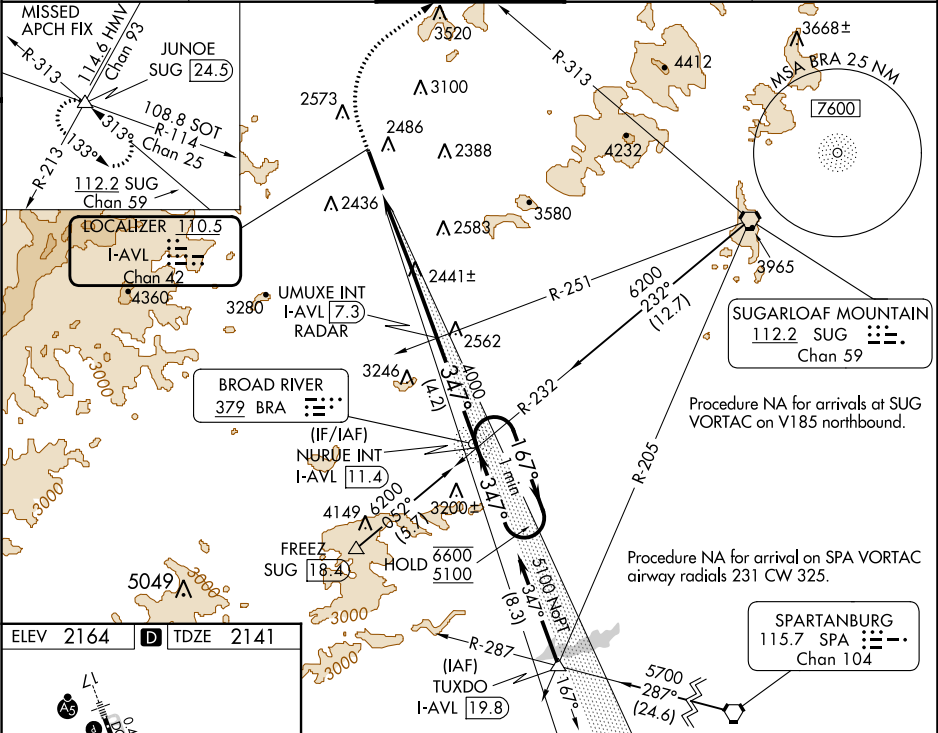

2700		6800	SUG R-313	JUNOE	UMUXE INT I-AVL (7.3) RADAR	NURUE INT I-AVL (11.4)	One Minute Holding Pattern
		hdg 020°					
I-AVL (1.5)		I-AVL (4.7)			4000	347°	167° → 6600
3.2 NM		2.5 NM			4000	347°	5100
							GS 3.00° TCH 56
CATEGORY		A	B	C	D		
S-ILS 35*		2360/24		219 (200-1/2)			
S-ILS 35		3019-4		878 (900-4)			
S-LOC 35		3200/40 1059 (1100-3/4)	3200/55 1059 (1100-1)	3200-2 1/2	1059 (1100-2 1/2)		
CIRCLING		3200-1 1/4 1036 (1100-1 1/4)	3200-1 1/2 1036 (1100-1 1/2)	3460-3 1296 (1300-3)	3720-3 1556 (1600-3)		