
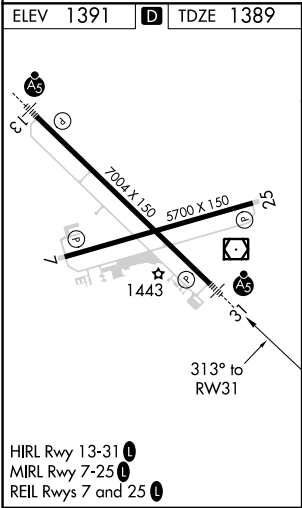


WAAS CH 99711 W31A	APP CRS 313°	Rwy Idg TDZE 1389 Apt Elev 1391
--	------------------------	---

RNAV (GPS) RWY 31

BEMIDJI RGNL (BJI)

RNP APCH.		MALSR 	MISSED APPROACH: Climb to 3200 direct TEGAE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1¼ SM.			
AWOS-3 119.275	MINNEAPOLIS CENTER 134.75 251.1	UNICOM 122.8 (CTAF) 	

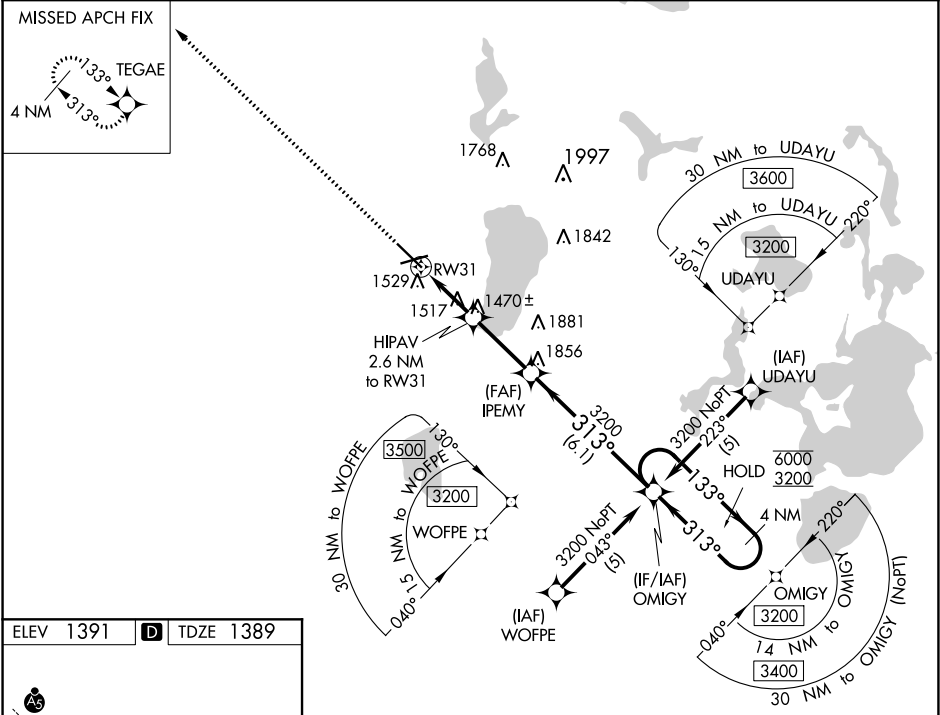

3200 TEGAE				
*LNAV only.				
RW31				
*1.1 NM to RW31				
HI PA V 2.6 NM to RW31				
IPEMY 3200				
OMIGY 4 NM Holding Pattern				
313° 133° 6000 3200				
GP 3.00° TCH 45				
CATEGORY	A	B	C	D
LPV DA	1589-½		200 (200-½)	
LNAV/VNAV DA	1825-1		436 (500-1)	
LNAV MDA	1780-½	391 (400-½)	1780-⅝ 391 (400-⅝)	1780-1 391 (400-1)
C CIRCLING	1840-1 449 (500-1)	1860-1 469 (500-1)	1860-1½ 469 (500-1½)	1960-2 569 (600-2)