

LOC/DME I-BRO	APP CRS	Rwy Idg	7399
110.3	132°	TDZE	19
Chan 40		Apt Elev	22

ILS or LOC RWY 13
BROWNSVILLE/SOUTH PADRE ISLAND INTL (BRO)


ADF or RADAR required.

⚠ VDP NA when using Port Isabel altimeter setting. For inop ALS increase S-LOC 13 Cats C and D visibility to 1 3/8 miles. When local altimeter setting not received, use Port Isabel altimeter setting and increase DA to 307 feet and all MDA 40 feet. S-LOC 13 Cat C and D visibility to RVR 5500, Circling Cat D visibility to 2 1/4 miles. For inop ALS when using Port Isabel altimeter setting increase S-LOC 13 Cats C/D visibility to 1 3/8 miles.

MALSR

MISSED APPROACH:
Climb to 700 then climbing left turn to 2000 direct HRL VOR/DME and hold.

ATIS	VALLEY APP CON	BROWNSVILLE TOWER *	GND CON	UNICOM
128.55	119.5 257.6	118.9 (CTAF) 239.3	121.9	122.95

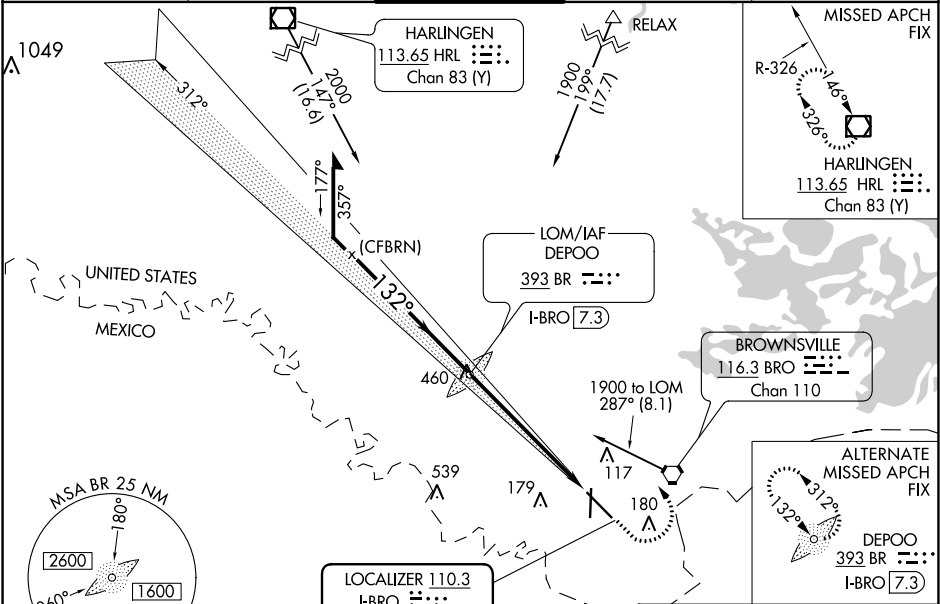

ELEV 22 D TDZE 19

Remain within 10 NM

DEPOO LOM I-BRO 7.3

1900 312° 1848 132° 1900

GS 2.75° TCH 58

700 2000 HRL

*I-BRO 2.8 I-BRO 1.4 *LOC only.

CATEGORY	A	B	C	D
S-ILS 13	269/24 250 (300-1/2)			
S-LOC 13	480/24 461 (500-1/2) 480/50 461 (500-1)			
CIRCLING	480-1 458 (500-1) 540-1 518 (600-1) 540-1 1/2 518 (600-1 1/2) 680-2 658 (700-2)			

MIRL Rwy 18-36
HIRL Rwy 13-31

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024