

APP CRS	Rwy Idg	4700
275°	TDZE	747
	Apt Elev	747

RNAV (GPS) RWY 27

DOWAGIAC MUNI (C91)


▽

NA

DME/DME RNP-0.3 NA. Procedure NA at night. Visibility reduction by helicopters NA. Obtain local altimeter setting on CTAF, when not received, use Elkhart altimeter setting and increase all MDA 60 feet; increase Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2500 direct JUBLA and hold.

SOUTH BEND APP CON ★	UNICOM
118.55 257.8	122.8 (CTAF) 0

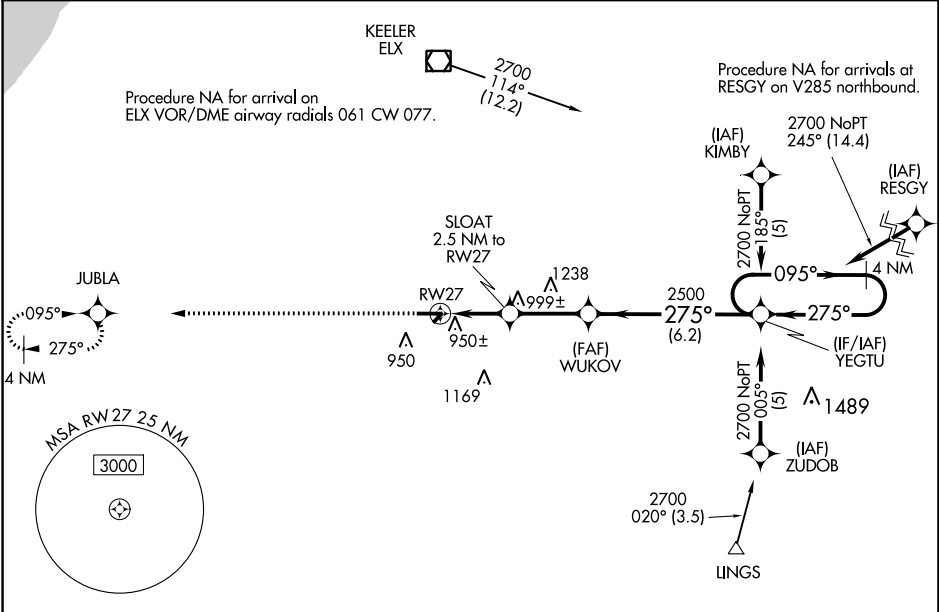

ELEV 747	TDZE 747
----------	----------

2500

JUBLA

275°

4700 X 100

2176 X 100

27

4 NM Holding Pattern

YEGTU

095° → 2700

← 275°

SLOAT 2.5 NM to RW27

WUKOV

275°

2500

1580

3.04° TCH 35

2.5

2.8 NM

6.2 NM

CATEGORY	A	B	C	D
LNAV MDA	1260-1	513 (600-1)	1260-1½ 513 (600-1½)	1260-1¾ 513 (600-1¾)
CIRCLING	1320-1	573 (600-1)	1480-2 733 (800-2)	1480-2¼ 733 (800-2¼)

REIL Rwy 9 and 27 0
MIRL Rwy 9-27 0