

LOC/DME I-VWT 110.9 Chan 46	APP CRS 352°	Rwy ldg TDZE Apt Elev 8000 5515 5515
---	------------------------	--

ILS or LOC RWY 35


COLORADO AIR AND SPACE PORT (CFO)

⚠ For inop ALS, increase S-LOC 35 Cats C and D visibility to 2½ SM.



MISSED APPROACH: Climb to 7500 on heading 352° and on GLL VOR/DME R-164 to PHLAT INT/DVV 6.6 DME and hold.

ATIS 119.025	DENVER APP CON 128.25 371.95	SPACE PORT TOWER ★ 120.2 (CTAF) 1	GND CON 124.7	CLNC DEL 124.7	CLNC DEL 121.75 (When twr closed)	UNICOM 122.95
------------------------	--	--	-------------------------	--------------------------	--	-------------------------

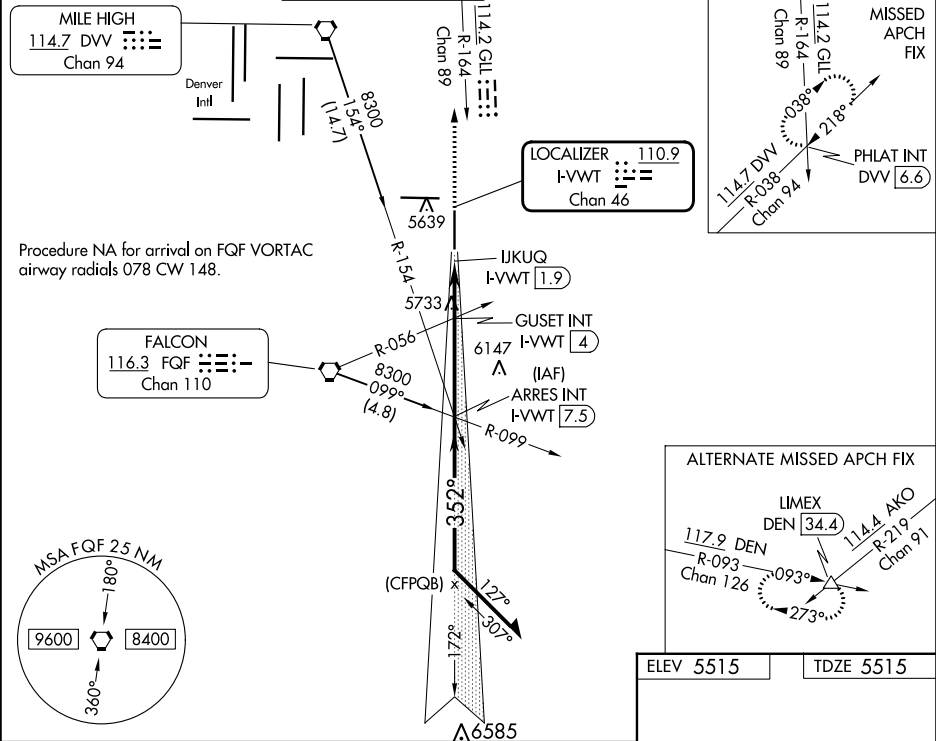

7500 hdg 352°	GLL R-164	PHLAT INT	ARRES INT I-VWT 7.5	Remain within 10 NM
*LOC only	*I-VWT 1.9	*I-VWT 3	GUSET INT I-VWT 4	
				7500
				7900
				6300*
				7500
				GS 3.00° TCH 54
CATEGORY	A	B	C	D
S-ILS 35	5715-½ 200 (200-½)			
S-LOC 35	6300-½ 785 (800-½)	6300-¾ 785 (800-¾)	6300-1¾ 785 (800-1¾)	
GUSET FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 35	6040-½ 525 (600-½)	6040-1 525 (600-1)		

