


LOC I-CKV <u>111.7</u>	APP CRS 347°	Rwy Idg 5999 TDZE 550 Apt Elev 550
----------------------------------	------------------------	---


LOC RWY 35
OUTLAW FLD (CKV)

ADF required. RADAR required.	MALS	MISSED APPROACH: Climb to 1800 then climbing right turn to 2200 direct CKV VOR/DME and hold.
 Circling NA W of Rwy 17-35. Circling Rwy 23 NA at night. Rwy 35 helicopter  visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Campbell AAF (Fort Campbell) altimeter setting. *DME from CKV VOR/DME.		

ASOS 134.575	CAMPBELL APP CON 134.35 307.025	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

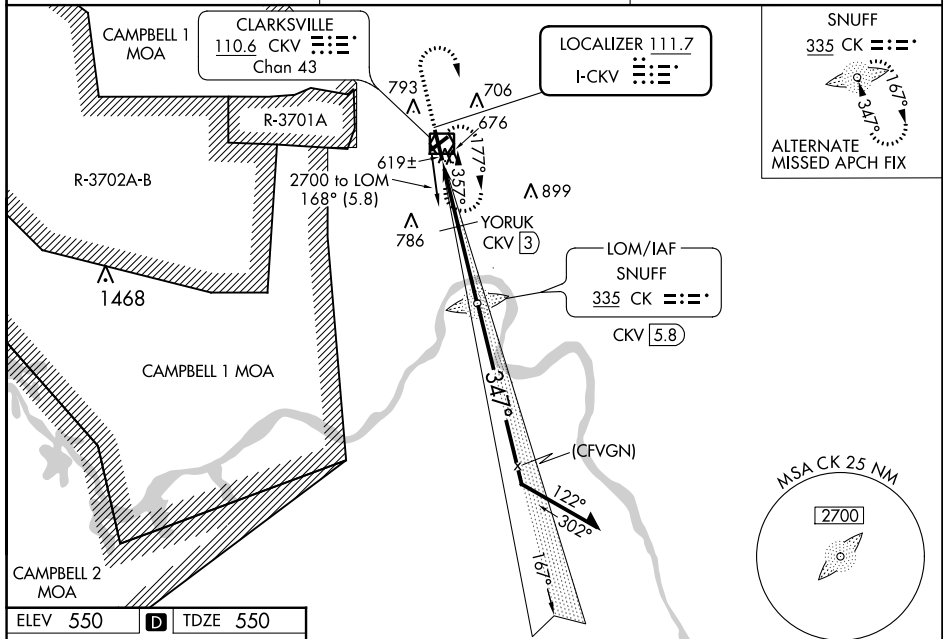

ELEV 550	D	TDZE 550
----------	----------	----------

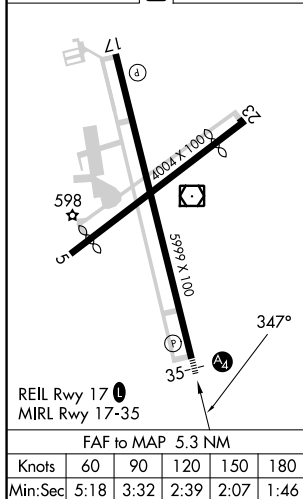

CATEGORY	A	B	C	D
S-LOC 35	1080- $\frac{3}{4}$	530 (600- $\frac{3}{4}$)	1080-1 $\frac{1}{4}$	530 (600-1 $\frac{1}{4}$)
C CIRCLING	1080-1	530 (600-1)	1080-1 $\frac{1}{2}$ 530 (600-1 $\frac{1}{2}$)	1200-2 650 (700-2)
YORUK FIX MINIMUMS * (DME REQUIRED)				
S-LOC 35	880- $\frac{3}{4}$ 330 (400- $\frac{3}{4}$)			
C CIRCLING	1000-1 450 (500-1)	1020-1 470 (500-1)	1020-1 $\frac{1}{2}$ 470 (500-1 $\frac{1}{2}$)	1200-2 650 (700-2)