

WAAS CH 56605 W05A	APP CRS 047°	Rwy Idg TDZE 1219 Apt Elev 1219
--	------------------------	---

RNAV (GPS) RWY 5

CHEROKEE COUNTY RGNL (CNI)

RNP APCH-GPS.

⚠

Circling Rwy 23 NA at night. Baro-VNAV and VDP NA when using Marietta altimeter setting.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C.

⚠

When local altimeter setting not received, use Marietta altimeter setting and increase LPV DA to 1546 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1631 feet; increase all MDAs 80 feet and LNAV Cats C/D visibility ½ SM and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 5400 direct STEVN and hold, continue climb-in-hold to 5400.

AWOS-3PT 119.825	ATLANTA APP CON 121.0 268.7	UNICOM 123.0 (CTAF) 0
----------------------------	---------------------------------------	---------------------------------

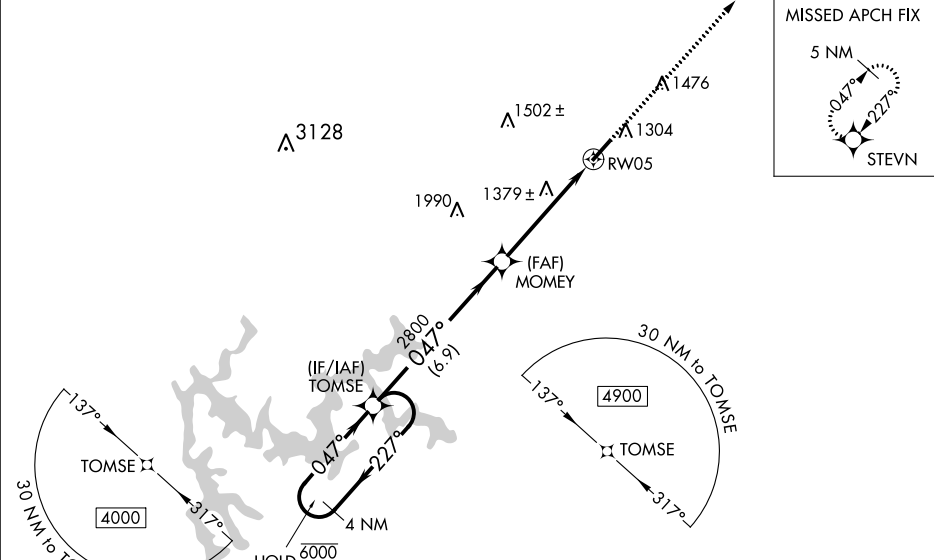

ELEV 1219

TDZE 1219

4 NM Holding Pattern TOMSE

GP 3.00° TCH 30

6000 ← 227°

4000 → 047°

047°

MOMMY 2800

1.3 NM to RWY 05

RWY 05

6.9 NM

3.6 NM

1.3 NM

5400 STEVN

↑

⬠

CATEGORY	A	B	C	D
LPV DA		1469-7⁄8	250 (300-7⁄8)	
LNAV/VNAV DA		1554-1 1⁄8	335 (400-1 1⁄8)	
LNAV MDA	1640-1	421 (500-1)	1640-1 1⁄4	421 (500-1 1⁄4)
CIRCLING	1720-1	501 (600-1)	1820-1 3⁄4	2040-2 3⁄4
			601 (700-1 1⁄4)	821 (900-2 3⁄4)

REIL Rwy 5 and 23 0

MIRL Rwy 5-23 0