



ILS or LOC RWY 13

LOC I-OVI <u>110.35</u>	APCH CRS 128°	Rwy Idg 8196 TDZE 4294 Arpt Elev 4295	AL-512 [USAF]	CANNON AFB (KCVS)	
ATC RADAR or DME required.			SSALR	↑ MISSED APPROACH: Climb to 6000 out CVS TACAN R-130	
▼ *When ALS inop, increase vis to ¾ mile.			(A3)	5.6 DME (HOME) then climbing right turn to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.	
ATIS 119.1 269.9	CANNON APP CON 118.425 352.1		CANNON TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225

**** When ALS inop, increase CAT AB vis to 1 mile;
CAT CDE vis to 1 3/8 miles.**

† Missed approach requires use of RNAV or ATC radar monitoring.

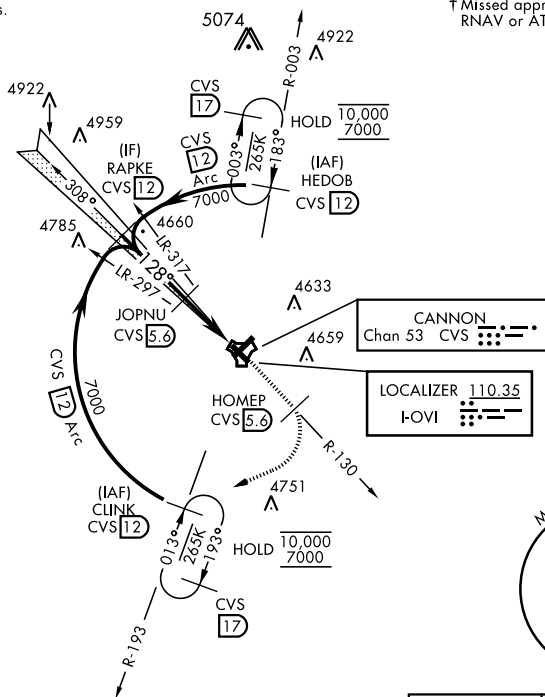

EMERG SAFE ALT 100 NM 8000

