

LOC I-CWF	APP CRS	Rwy Idg	10702
<u>110.7</u>	154°	TDZE	16
		Apt Elev	17

ILS or LOC RWY 15
CHENNAULT INTL (CWF)

ADF or DME required for procedure entry. ADF or DME required for LOC only.

V VDP: NA when using Lake Charles Rgnl altimeter setting. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting: Increase DA to 2322 feet; Increase all MDAs 20 feet and visibility Circling Cat D ¼ SM. For inop ALS, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cats C/D/E to 1 ½ SM. For inop ALS when using Lake Charles altimeter settings, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cats C/D/E to 1 ½ SM. DME from LCH VORTAC. DME use requires simultaneous reception of I-CWF and LCH DME.


MALSR



MISSED APPROACH:
Climb to 2000 direct
LCH VORTAC and
hold, continue
climb-in-hold to 2000.

ATIS 120.0	LAKE CHARLES APP CON★ 119.8 282.3	CHENNAULT TOWER★ 124.2 (CTAF) 0 290.4	GND CON 121.65 275.8	UNICOM 122.95
----------------------	---	---	--------------------------------	-------------------------

ALTERNATE MISSED
APCH FIX

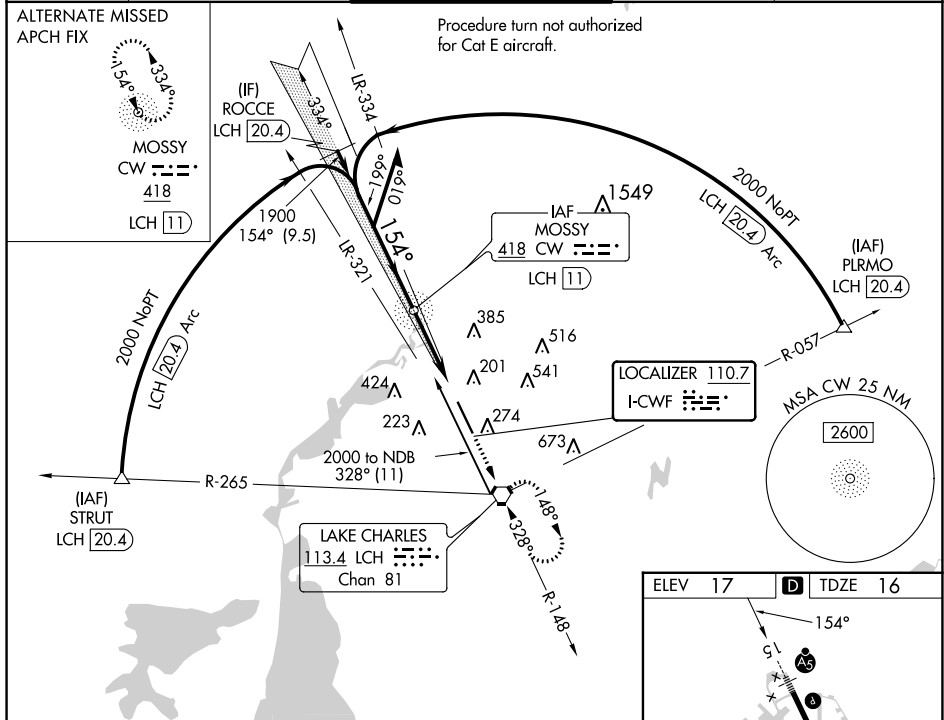

CATEGORY	A	B	C		D		E	REIL Rwy 33 ①	33			
S-ILS 15	216-½ 200 (200-½)							HIRL Rwy 15-33 ①				
S-LOC 15	480-½	464 (500-½)	480-1		464 (500-1)		FAF to MAP 5.5 NM					
CIRCLING	640-1	623 (700-1)	640-1¾	740-2¼	900-3		Knots	60	90	120	150	180
			623 (700-1¾)	723 (800-2¼)	883 (900-3)	Min:Sec	5:30	3:40	2:45	2:12	1:50	

