

WAAS CH 86729 W14A	APP CRS 144°	Rwy Idg TDZE Apt Elev	4200 701 708
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 14

CLINTON MUNI (CWI)

Rwy 14 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LNAV visibility Cat C ¼ mile.

MISSED APPROACH:
Climb to 2500 direct BELRE and hold.

AWOS-3PT 125.525	QUAD CITY APP CON ★ 125.95 257.8	CLNC DEL 118.5 0	UNICOM 122.8 (CTAF)
----------------------------	--	----------------------------	-------------------------------

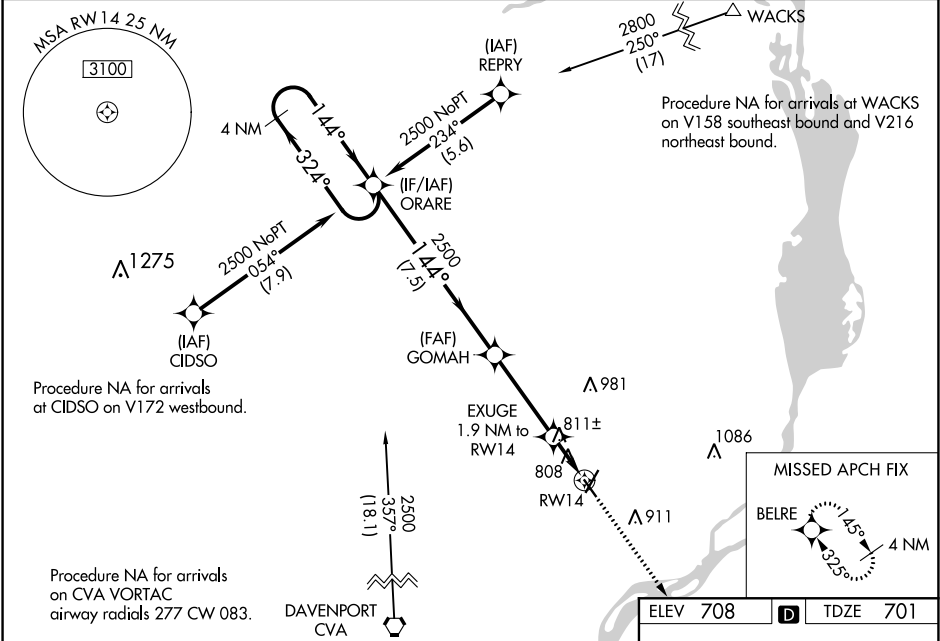

4 NM Holding Pattern

ORARE

GOMAH

2500

EXUGE 1.9 NM to RW14

RW14

*1340

*LNAV only

GP 3.00° TCH 40

2500

324°

144°

144°

2500

7.5 NM

3.6 NM

1.9 NM

CATEGORY	A	B	C	D
LPV DA	951-1	250 (300-1)		NA
LNAV/VNAV DA	968-1	267 (300-1)		NA
LNAV MDA	1080-1	379 (400-1)		NA
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1½ 532 (600-1½)	NA

