

WAAS CH 87006 W22A	APP CRS 224°	Rwy Idg 7301 TDZE 913 Apt Elev 913
--	------------------------	---

RNAV (GPS) RWY 22
CHIPPEWA VALLEY RGNL (EAU)

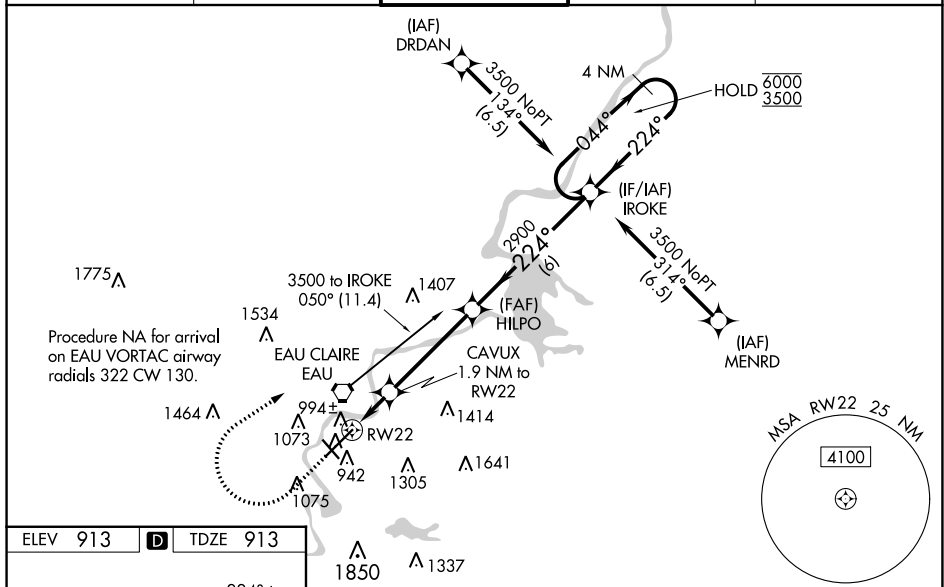
RNP APCH.

T Baro-VNAV and VDP NA when using Rice Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Rice Lake altimeter setting and increase LPV DA to 1223, LNAV/VNAV DA to 1285, and increase LNAV/VNAV visibility all Cats ¼ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM. For inop ALS increase LNAV/VNAV visibility all Cats to ¾ SM and LNAV Cats C/D visibility to 1 SM. For inop ALS when using Rice Lake altimeter setting increase LPV visibility all Cats to 1 SM and LNAV Cats C/D visibility to 1 ¾ SM.

MALSR

MISSED APPROACH:
Climb to 1320 then
climbing right turn to
3500 direct IROKE
and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
-----------------	-----------------------------------	--	--------------------	------------------

[illegible]

RNAV (GPS) RWY 22