

WAAS CH 77905 W23A	APP CRS 234°	Rwy Idg TDZE Apt Elev	7300 7143 7143
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23

EVANSTON-UINTA COUNTY BURNS FLD (E V W)

RNP APCH - GPS.


▼

For inoperative MALSR, increase LPV all Cats visibility to 1, LNAV/VNAV Cat D to 1 and LNAV Cat D to 1¼. When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -29°C or above 34°C.

MALSR

MISSED APPROACH: Climb to 12000 direct SOLNE and via 212° track to COOLI and hold, continue climb-in-hold to 12000.

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF)
----------------------	--	----------------------	-------------------------------

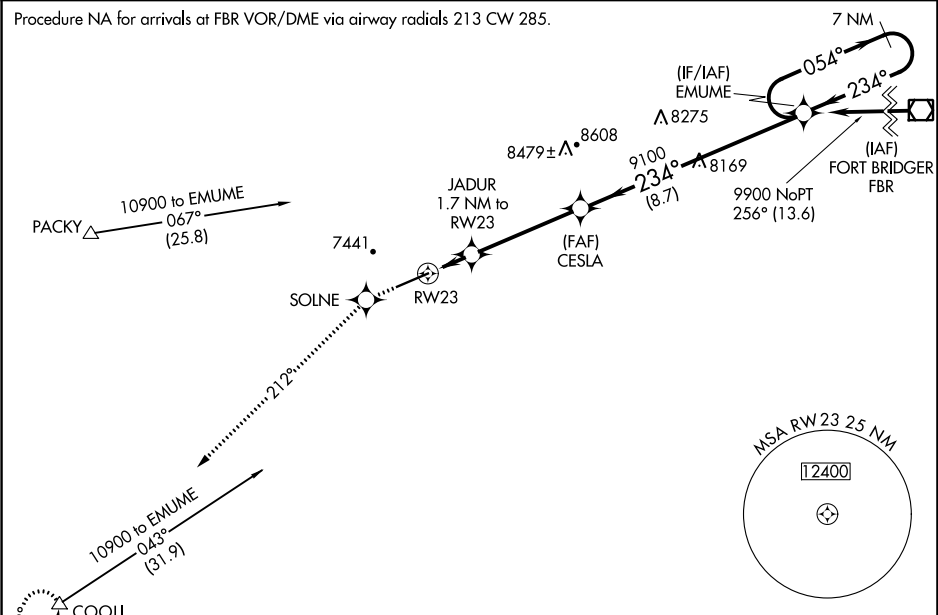

ELEV 7143

TDZE 7143

12000	SOLNE	212° tr	COOLI	
*LNAV only				
*1.1 NM to RW23				
JADUR 1.7 NM to RW23				
CESLA				
EMUME				
7 NM Holding Pattern				
7700*				
9100				
9900				
GP 3.00° TCH 47				
1.1 NM 0.6 NM 4.2 NM 8.7 NM				
CATEGORY	A	B	C	D
LPV DA	7393-½ 250 (300-½)			
LNAV/VNAV DA	7443-½ 300 (300-½)		7443-¾ 300 (300-¾)	
LNAV MDA	7520-½ 377 (400-½)		7520-1 377 (400-1)	
CIRCLING	7680-1 537 (600-1)	7760-1 617 (700-1)	7800-1¾ 657 (700-1¾)	8000-2¾ 857 (900-2¾)

REIL Rwy 5

HIRL Rwy 5-23