

LOC I-CAC 111.7	APP CRS 174°	Rwy Idg TDZE 1530 Apt Elev 1534
---------------------------	------------------------	---

ILS or LOC RWY 17

NEWTON-CITY-COUNTY (E WK)



ADF required for Procedure entry. ADF required.

▼ When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting:
▲ increase S-ILS 17 DA to 1819 feet; increase all MDAs 100 feet and visibility S-LOC 17 Cat C/D ¾ SM. For inop ALS, increase S-LOC 17 Cat C/D visibility to 1 SM. Circling Rwy 8, 26 NA at night.
For inop ALS when using Wichita Dwight D Eisenhower Ntl altimeter setting, increase S-ILS 17 visibility to ¾ SM and S-LOC 17 Cat C/D to 1 ½ SM. Autopilot coupled approach NA below 2000.


MALSR

MISSED APPROACH:
Climb to 2500 then
climbing left turn to
3200 direct HARVS
LOM and hold.

AWOS-3PT 123.875	WICHITA APP CON 125.5 306.2	CLNC DEL 126.55	UNICOM 123.0 (CTAF) 0
----------------------------	---------------------------------------	---------------------------	---------------------------------

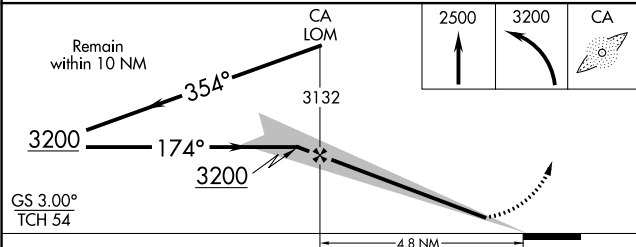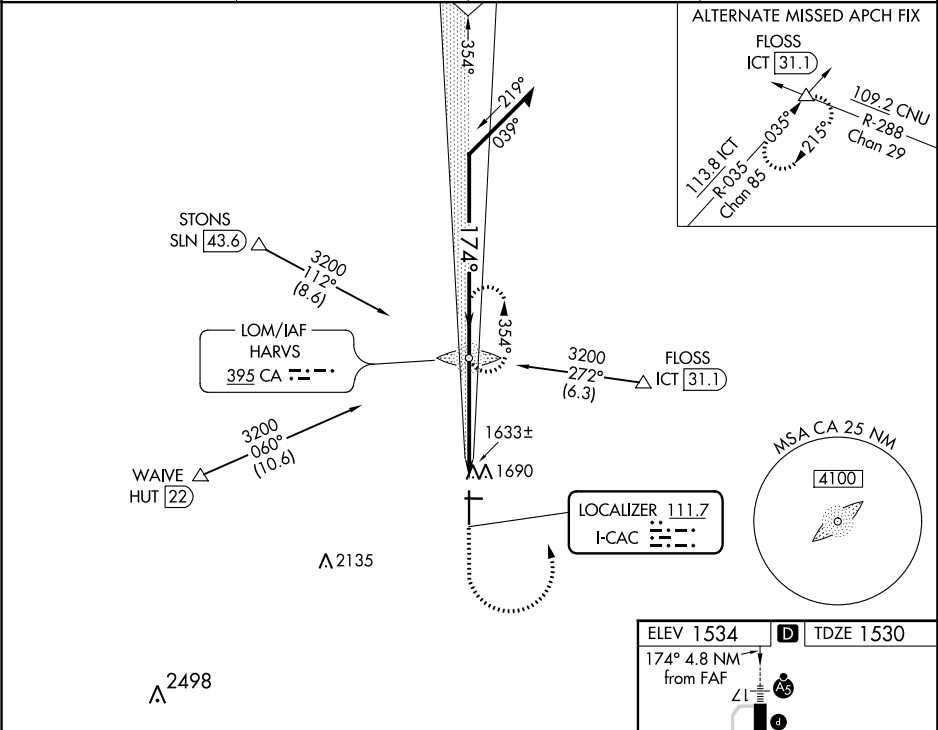

CATEGORY	A	B	C	D
S-ILS 17	1730-½ 200 (200-½)			
S-LOC 17	1900-½ 370 (400-½)		1900-⅝ 370 (400-⅝)	
CIRCLING	2000-1 466 (500-1)		2000-1½ 466 (500-1½)	2100-2 566 (600-2)

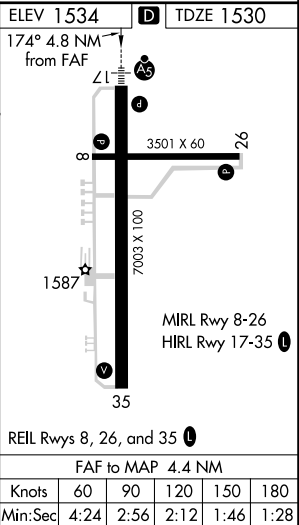

NC-2, 22 FEB 2024 to 21 MAR 2024

NC-2, 22 FEB 2024 to 21 MAR 2024