



WAAS CH 86728 W18A	APP CRS 178°	Rwy Idg 3204 TDZE 255 Apt Elev 256
--	------------------------	---

RNAV (GPS) RWY 18


JONESBORO (F88)

▼ NA Procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Obtain local altimeter setting on CTAF; when not received, use Ruston altimeter setting and increase all MDAs 60 feet, and visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 2000 direct ZOBTA and hold.
--	--

MONROE APP CON ★ 126.9 307.9	(CTAF) 122.9 0
--	--------------------------

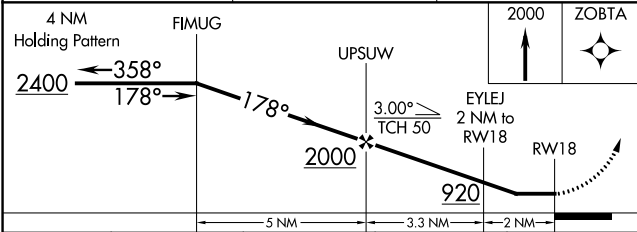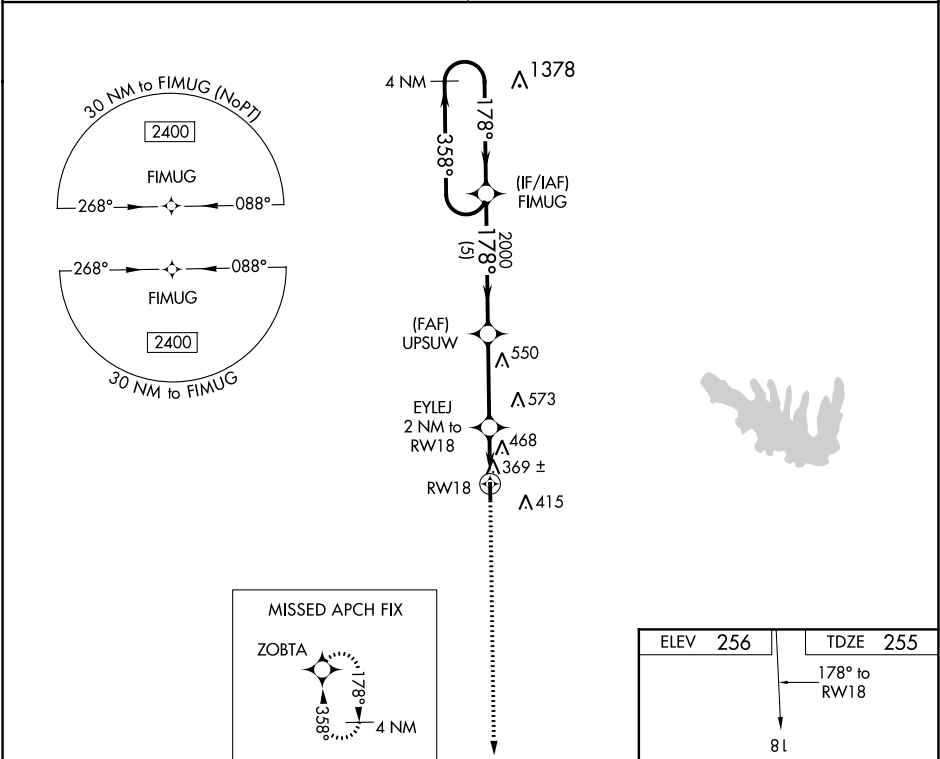

CATEGORY	A	B	C	D
LP MDA	620-1	365 (400-1)		NA
LNAV MDA	720-1	465 (500-1)	720-1 3/8 465 (500-1 3/8)	NA
CIRCLING	780-1	524 (600-1)	880-1 3/4 624 (700-1 3/4)	NA

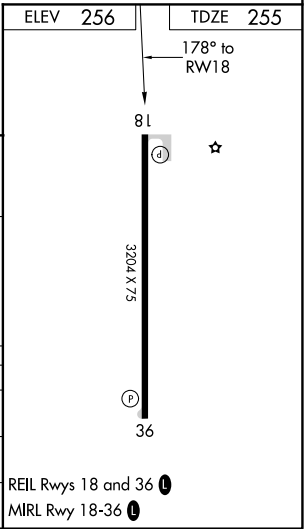

SC-4, 22 FEB 2024 to 21 MAR 2024



SC-4, 22 FEB 2024 to 21 MAR 2024

Procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Ruston altimeter setting and increase all MDAs 60 feet and visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 2400 direct FIMUG and hold.

MONROE APP CON ★
126.9 307.9

(CTAF)
122.9 0

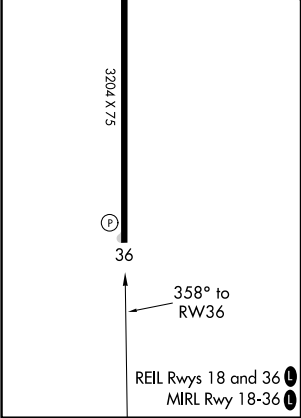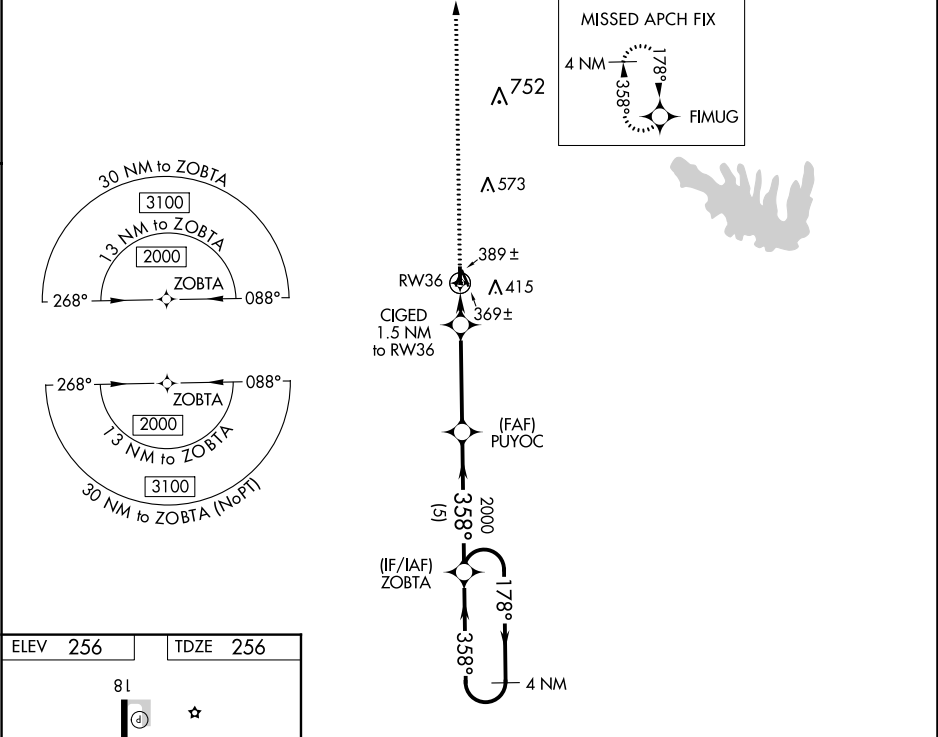

2400	FIMUG	PUYOC	ZOBTA	4 NM Holding Pattern
2000	358°	178°	2000	358°
CIGED 1.5 NM to RW36	760	3.00° TCH 50	1.5 NM	3.8 NM
RW36	5 NM			
CATEGORY	A	B	C	D
LP MDA	620-1	364 (400-1)		NA
LNAV MDA	640-1	384 (400-1)	640-1 3/8 384 (400-1 1/8)	NA
CIRCLING	780-1	524 (600-1)	880-1 3/4 624 (700-1 3/4)	NA