


WAAS CH 70710 W09A	APP CRS 092°	Rwy Idg TDZE 147 Apt Elev 147	6502
--	------------------------	---	-------------

RNAV (GPS) RWY 9

FLORENCE RGNL (FLO)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 2000 direct ESVAC and hold.		
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling Rwy 1, 19 NA at night.					
ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 0 353.85	GND CON 121.9 353.85	CLNC DEL 121.9 353.85	UNICOM 122.95

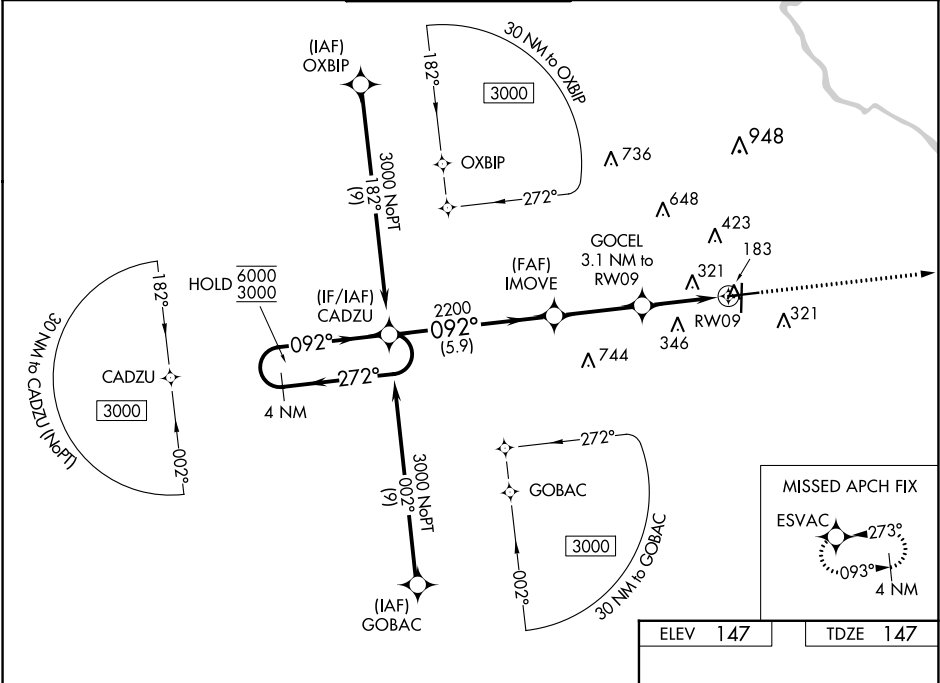

4 NM Holding Pattern

CADZU

IMOVE

GOCEL 3.1 NM to RWY 09

1.2 NM to RWY 09

RWY 09

2000

2500

ESVAC

6000 ← 272°

3000 → 092°

092°

2200

1180

GP 3.00°

TCH 59

5.9 NM

3.2 NM

1.9 NM

1.2 NM

CATEGORY	A	B	C	D
LPV DA		347- $\frac{1}{2}$	200 (200- $\frac{1}{2}$)	
LNAV/VNAV DA		603- $\frac{7}{8}$	456 (500- $\frac{7}{8}$)	
LNAV MDA	580- $\frac{1}{2}$	433 (500- $\frac{1}{2}$)	580- $\frac{3}{4}$	433 (500- $\frac{3}{4}$)
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2 $\frac{1}{4}$ 753 (800-2 $\frac{1}{4}$)	900-2 $\frac{1}{2}$ 753 (800-2 $\frac{1}{2}$)

TWR 245

253

61

0.4% UP

0.5% UP

6000 X 150

6502 X 150

092°

REIL Rwy 1, 19 and 27

HIRL Rwy 9-27

MIRL Rwy 1-19