

SIoux FALLS, SOUTH DAKOTA

LOC I-FSD
109.9

APCH CRS
030°

Rwy ldg
8999
TDZE
1424
Arprt Elev
1430

AL-396 [USAF]

JOE FOSS FLD (KFSD)



HI-ILS or LOC RWY 3

DME required.
* When ALS inop, increase CAT CDE RVR to 40, vis to ¾ mile.
** When ALS inop, increase CAT CDE vis to 1½ mile.
*** When ALS inop, increase CAT CDE RVR to 55, vis to 1 mile.

MALSR
A5

MISSED APPROACH: Climb to 3400, then climbing left turn to 5000 on heading 240° and FSD VORTAC R-269 to FRYRE (FSD 1.5 DME) and hold.

ATIS 126.6	SIoux FALLS APP CON 125.8 306.2	SIoux FALLS TOWER ★ 118.3(CTAF) 257.8	GND CON 121.9 348.6	ASR
---------------	------------------------------------	--	------------------------	-----

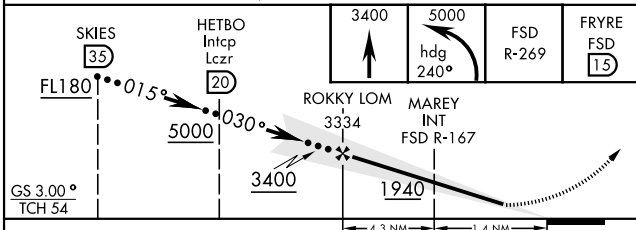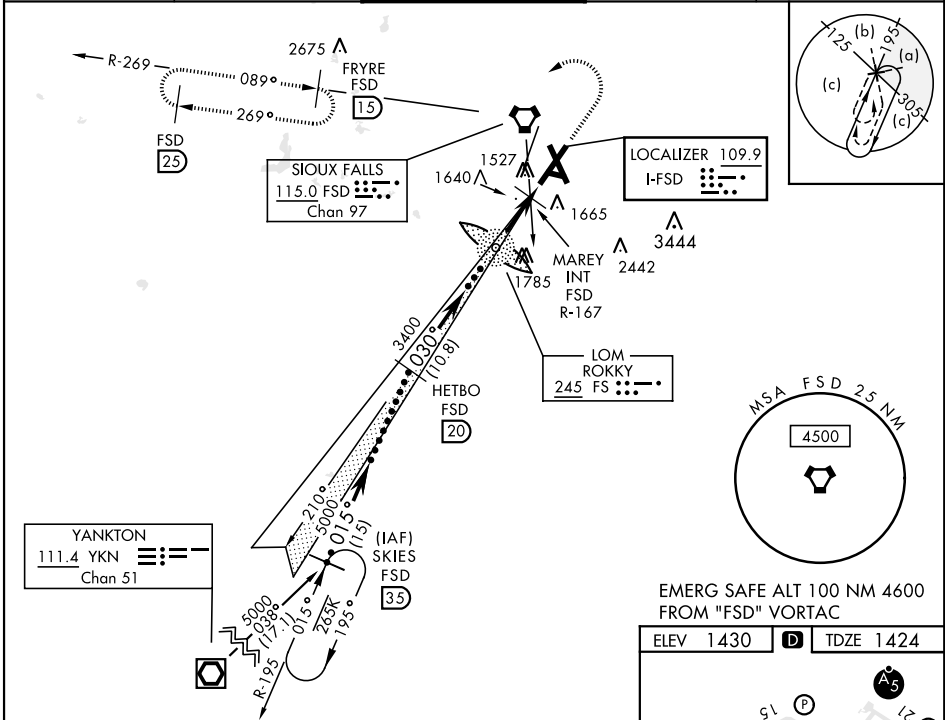

CATEGORY	C	D	E
S-ILS 3 *	1674/24	250	(300-½)
S-LOC 3 **	1940/55 516 (600-1)	1940/60 516 (600-1½)	
CIRCLING	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)	2300-3 870 (900-3)
MAREY FIX MINIMA			
S-LOC 3 ***	1780/30 356 (400-¾)	1780/40 356 (400-¾)	
CIRCLING	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)	2300-3 870 (900-3)

NC-1, 22 FEB 2024 to 21 MAR 2024

NC-1, 22 FEB 2024 to 21 MAR 2024