

WAAS CH 87037 W28A	APP CRS 276°	Rwy Idg TDZE Apt Elev	3463 1013 1048
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28


GREENVILLE DOWNTOWN (GMU)

T Baro-VNAV NA when using Greer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.



A When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ½ mile. Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 19 NA.

MISSED APPROACH:
Climb to 3700 direct
FOORT and hold.

ATIS ★ 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
-------------------	----------------------------------	--	-------------------	------------------

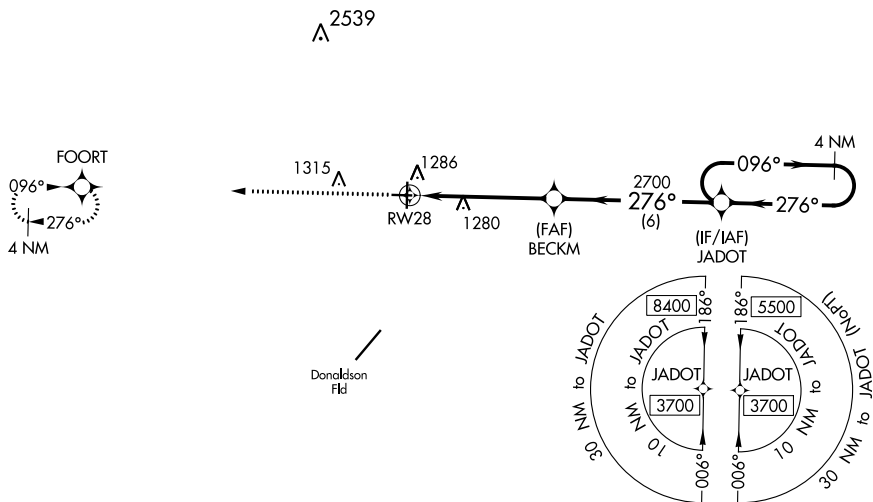

ELEV	1048	D	TDZE	1013
------	------	----------	------	------

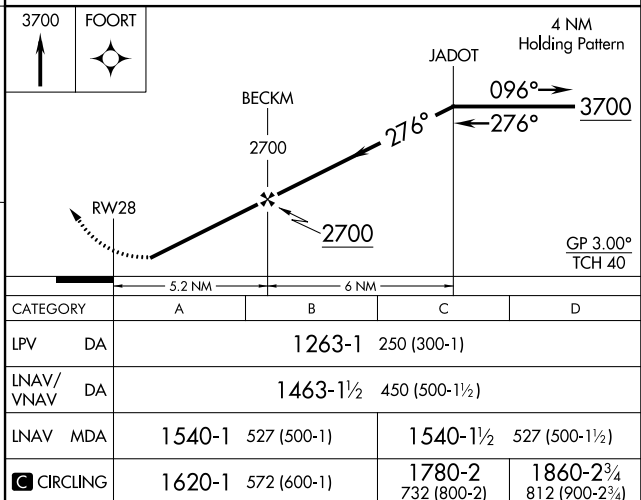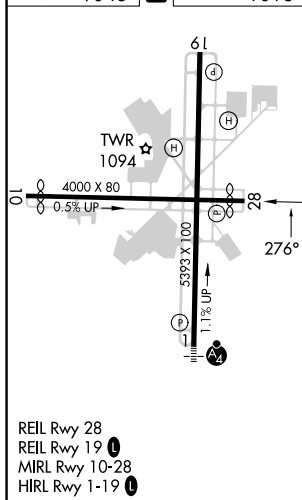

CATEGORY		A	B	C	D
LPV	DA	1263-1 250 (300-1)			
LNAB/ VNAV	DA	1463-1½ 450 (500-1½)			
LNAB	MDA	1540-1 527 (500-1)	1540-1½ 527 (500-1½)		
 CIRCLING		1620-1 572 (600-1)	1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)	