


LOC/DME I-GYY	APP CRS	Rwy Idg	7959
108.75	306°	TDZE	591
Chan 24 (Y)		Apt Elev	597

ILS or LOC RWY 30

GARY/CHICAGO INTL (GYY)

DME or RADAR required. RNP APCH - GPS from HTDOG.	MALSR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct CGT VORTAC and hold.
For inop ALS, increase S-LOC-30 Cats C and D visibility to 1½ SM. HROLD fix minimums: for inop ALS increase S-LOC-30 Cats C and D visibility to RVR 6000. **RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Chicago Midway Intl altimeter setting).		

ATIS	CHICAGO APP CON	GARY TOWER ★	GND CON
134.575	133.1 285.6	125.6 (CTAF) 0	121.9

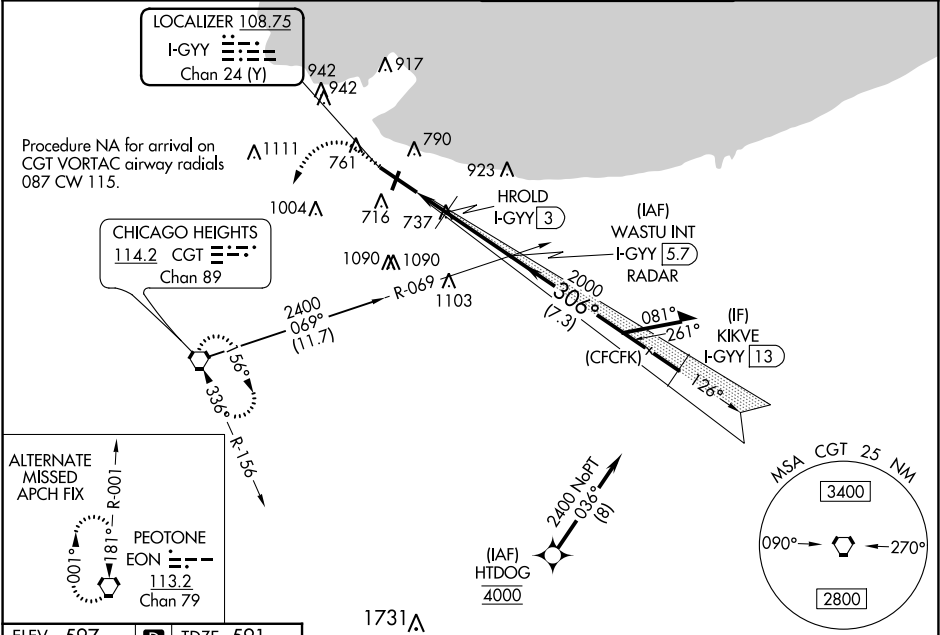

ELEV 597	D	TDZE 591
1500	2400	CGT
#1120 when using Chicago Midway Intl altimeter setting.	HROLD I-GYY [3]	WASTU INT I-GYY [5.7] RADAR
1060 #	1060 #	2000
1.5 NM	2.8 NM	1.26°
306°	306°	2400
GS 3.00°	TCH 57	Remain within 10 NM
REIL Rwy 12-30	HIRL Rwy 12-30	MIRL Rwy 2-20
FAF to MAP 4.3 NM		
Knots	60	90
Min:Sec	4:18	2:52
	2:09	1:43
	1:26	