

LOC I-HSA <u>110.35</u>	APP CRS 182°	Rwy Idg 8498 TDZE 23 Apt Elev 23
-----------------------------------	------------------------	---

ILS Z or LOC Z RWY 18
STENNIS INTL (HSA)



A Circling NA for Cat E W of Rwy 18-36. ADF or DME required. When local altimeter setting not received, use Gulfport altimeter setting; increase SDA to 270 feet; increase all MDA 60 feet and S-LOC 18 Cats C/D/E visibility $\frac{1}{8}$ mile, Circling Cat C visibility $\frac{1}{8}$ mile and Cats D/E visibility $\frac{1}{4}$ mile. WUDGU FIX minimums: increase S-LOC 18 Cats C/D/E visibility $\frac{1}{4}$ mile, and Circling Cats D/E $\frac{1}{4}$ mile. For inop MALSR, increase S-ILS 18 Cat E visibility to $\frac{3}{4}$ mile, and S-LOC 18 Cats C/D/E visibility to $\frac{1}{2}$ mile. WUDGU FIX minimums: increase S-LOC 18 Cats C/D/E visibility to 1 mile. For inop MALSR when using Gulfport altimeter setting, increase S-ILS 18 Cat E visibility to $\frac{3}{4}$ mile and S-LOC Cat E visibility to $\frac{1}{2}$ mile. WUDGU FIX minimums: increase S-LOC 18 Cat E visibility to $\frac{1}{4}$ mile.

MALSR
A5

MISSED APPROACH:
Climb to 700 then
climbing left turn to
2000 on heading
010° and on PCU
VOR/DME R-077 to
STENN INT and hold.

AWOS-3PT	GULFPORT APP CON★	STENNIS TOWER★	GND CON	UNICOM
118.375	124.6 354.1 (130°-309°) 127.5 254.25 (310°-129°)	127.15 (CTAF) 0 229.4	121.725 229.4	122.95

ADF or DME REQUIRED

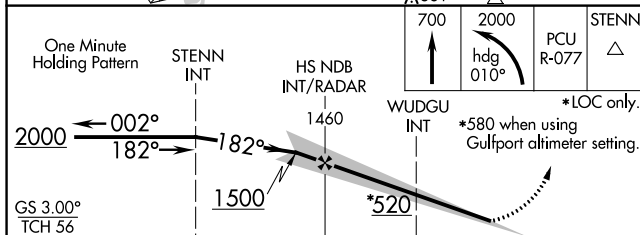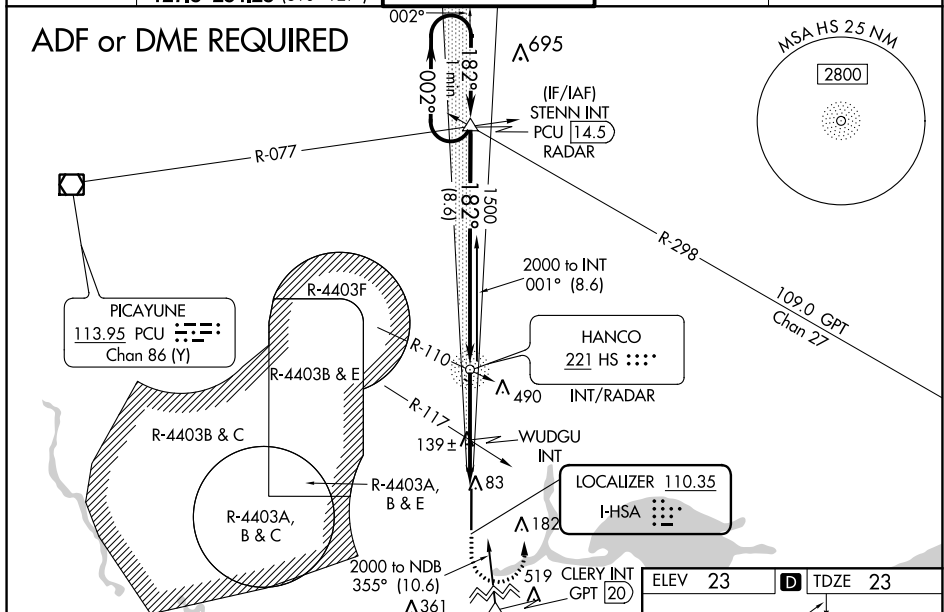

					
CATEGORY	A	B	C	D	E
S-ILS 18	223-½ 200 (200-½)				
S-LOC 18	520-½ 497 (500-½)	520-1 497 (500-1)			
C CIRCLING	520-1 497 (500-1)	520-1½ 497 (500-1½)	820-2½ 797 (800-2½)	820-2¾ 797 (800-2¾)	
WUDGU FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 18	400-½ 377 (400-½)	400-⅝ 377 (400-⅝)			
C CIRCLING	480-1 457 (500-1)	520-1½ 497 (500-1½)	820-2½ 797 (800-2½)	820-2¾ 797 (800-2¾)	

