

LOC I-WD
111.5

APP CRS
270°

Rwy ldg
TDZE
Apt Elev
6501
1230
1230

ILS or LOC RWY 27

GOGEBIC/IRON COUNTY (IWD)

▼

NA

27°C



When local altimeter setting not received, use Ashland altimeter setting: increase DA to 1562 feet; increase all MDA 140 feet and S-LOC 27 Cat C/D visibility ½ SM and Circling Cat B visibility ¼ SM. For inop ALS when using Ashland altimeter setting, increase S-ILS 27 all Cats visibility to 1.

MALSR

A5

MISSED APPROACH:
Climb to 3300 then right turn direct IWD VOR/DME and hold.

AWOS-3PT 125.175	MINNEAPOLIS CENTER 133.55	UNICOM 122.8 (CTAF)
----------------------------	-------------------------------------	-------------------------------

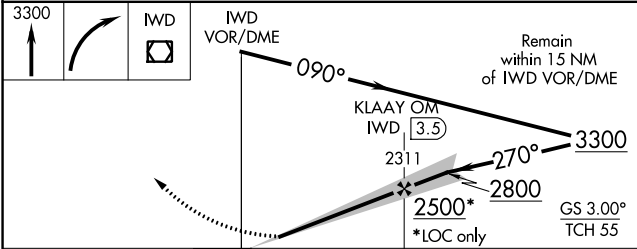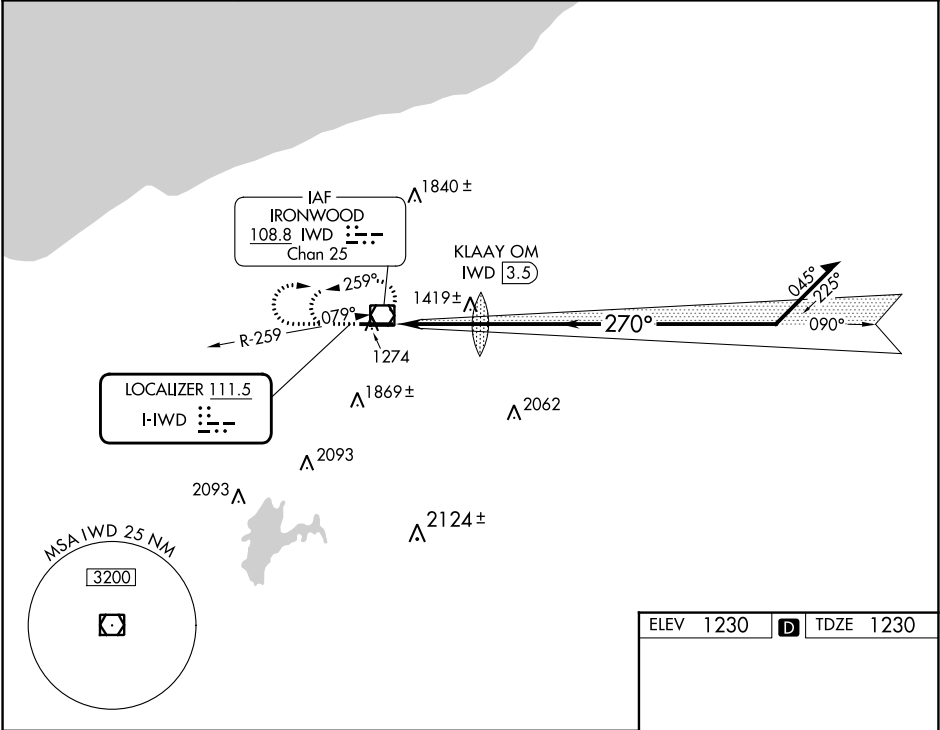

CATEGORY	A	B	C	D
S-ILS 27		1430-½	200 (200-½)	
S-LOC 27	1720-½	490 (500-½)	1720-¾ 490 (500-¾)	1720-1 490 (500-1)
CIRCLING	2100-1¼	870 (900-1¼)	2200-3 970 (1000-3)	2220-3 990 (1000-3)

ELEV 1230 D TDZE 1230

REIL Rwy 9
HIRL Rwy 9-27

FAF to MAP 3.2 NM

Knots	60	90	120	150	180
Min:Sec	3:12	2:08	1:36	1:17	1:04