


WAAS CH 63234 W17A	APP CRS 173°	Rwy Idg 4100 TDZE 1153 Apt Elev 1153
--	------------------------	---

RNAV (GPS) RWY 17


ABILENE MUNI (K78)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3400 direct ADELA and hold.
Rwy 17 helicopter visibility reduction below 1 SM NA. Straight-in to Rwy 17 NA at night, Circling Rwy 17 NA at night. When local altimeter setting not received, use Salina altimeter setting and increase Circling Cat A and B MDA 80 feet.	

AWOS-2 124.125	MARSHALL GCA* 121.25 254.35	UNICOM 122.8 (CTAF)
--------------------------	---------------------------------------	-------------------------------

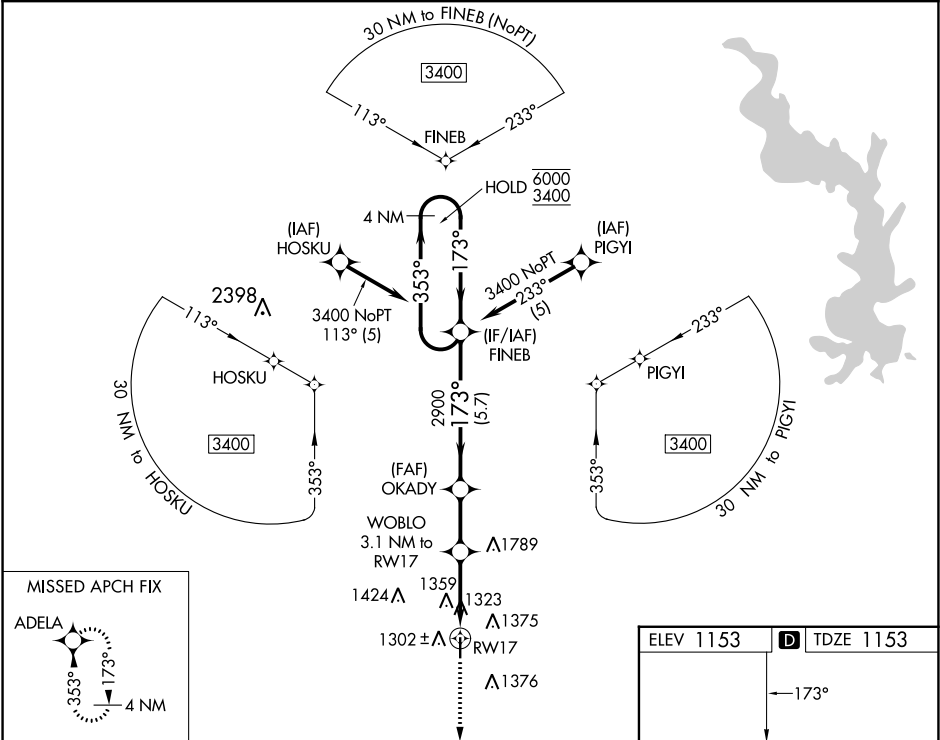

Visual Segment - Obstacles.				
3400 ADELA OKADY WOBLO 3.1 NM to RWY 17 RWY 17 2180 2900 353° 173° 6000 3400 4 NM Holding Pattern 3.1 NM 2.3 NM 5.7 NM				
CATEGORY	A	B	C	D
LP MDA	1640-1	487 (500-1)	1640-1 $\frac{3}{8}$ 487 (500-1 $\frac{3}{8}$)	NA
LNAV MDA	1680-1	527 (600-1)	1680-1 $\frac{1}{2}$ 527 (600-1 $\frac{1}{2}$)	NA
CIRCLING	1740-1	587 (600-1)	1980-2 $\frac{1}{2}$ 827 (900-2 $\frac{1}{2}$)	NA

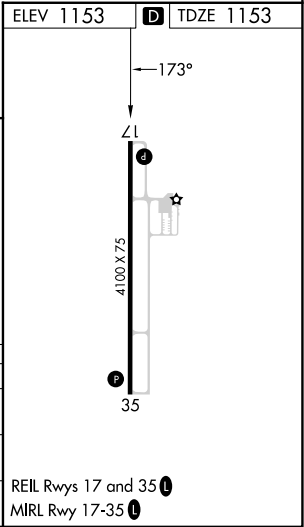

WAAS CH 97734 W35A	APP CRS 353°	Rwy Idg 4100 TDZE 1151 Apt Elev 1153
--	------------------------	---

RNAV (GPS) RWY 35

ABILENE MUNI (K78)



⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Salina altimeter setting. When local altimeter setting not received, use Salina altimeter setting. Circling Rwy 17 NA at night.

MISSED APPROACH: Climb to 3400 direct FINEB and hold.

AWOS-2 124.125	MARSHALL GCA★ 121.25 254.35	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	--

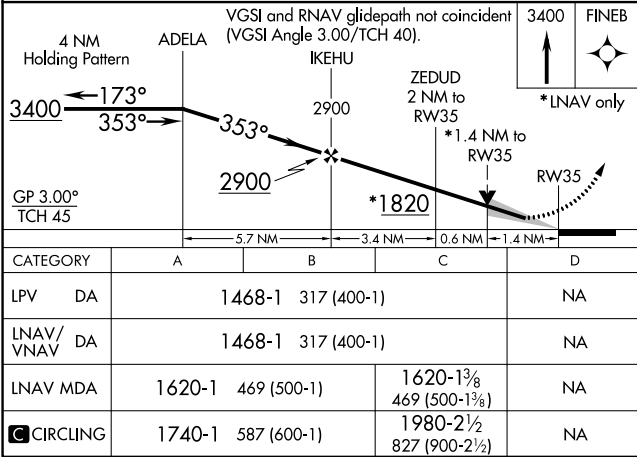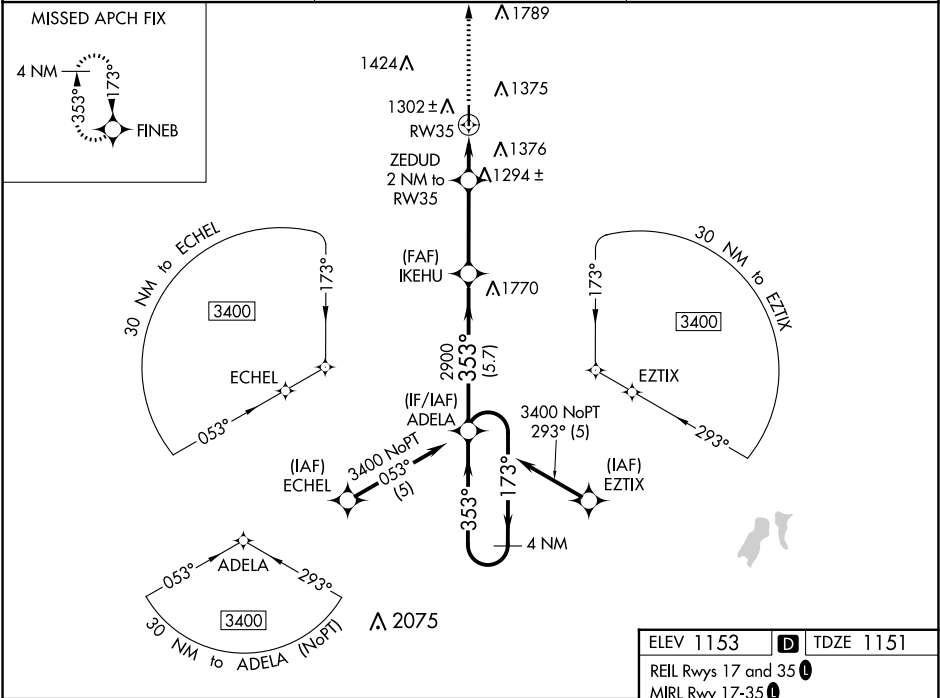

ELEV 1153	D	TDZE 1151
REIL Rwy 17 and 35	0	
MIRL Rwy 17-35	0	

VORTAC SLN 117.1 Chan 118	APP CRS 087°	Rwy Idg TDZE Apt Elev 1153	N/A N/A 1153
---	------------------------	---	---




VOR-A
ABILENE MUNI (K78)

▼ ▲ DME required. When local altimeter setting not received, use Salina altimeter setting. Rwy 17 helicopter visibility reduction below 1 SM NA. Circling Rwy 17 NA at night.	MISSED APPROACH: Climb to 2600 then climbing right turn to 3000 on heading 320° and SLN VORTAC R-087 to CHALK/13.1 DME and hold.
---	--

AWOS-2 124.125	MARSHALL GCA ★ 121.25 254.35	UNICOM 122.8 (CTAF) 📻
--------------------------	--	--

DME REQUIRED

▲ 2398

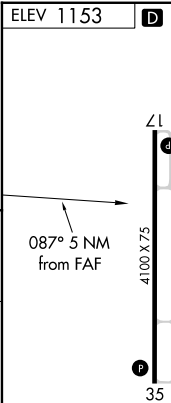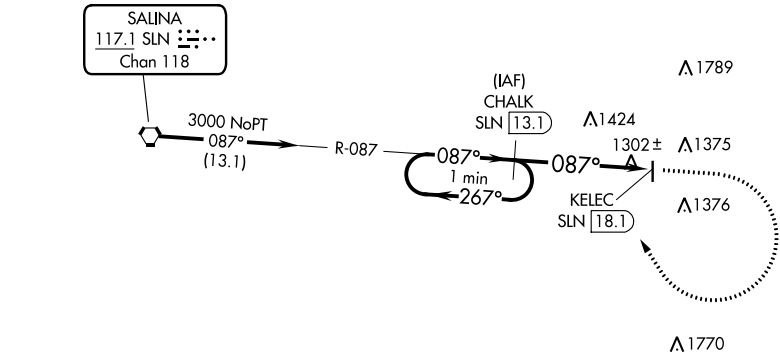

One Minute Holding Pattern			
CHALK SLN 13.1			
3000 ← 267° 087° →			
2600 3000 SLN R-087 CHALK SLN 13.1			
087°			
KELEC SLN 18.1			
5 NM			
CATEGORY	A	B	C
📻 CIRCLING	1760-1 607 (700-1)	1980-2½ 827 (900-2½)	NA