


APP CRS	Rwy Idg	4000
232°	TDZE	995
	Apt Elev	995


RNAV (GPS) RWY 23

TRI-STATE STEUBEN COUNTY (A.NQ)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct FELAX and hold.
▼ Rwy 23 helicopter visibility reduction below 1 SM NA. Procedure NA at night.		
AWOS-3 118.175	FORT WAYNE APP CON 127.2 284.6 (SW/NW) 132.15 284.6 (SE/NE)	UNICOM 123.075 (CTAF) 0

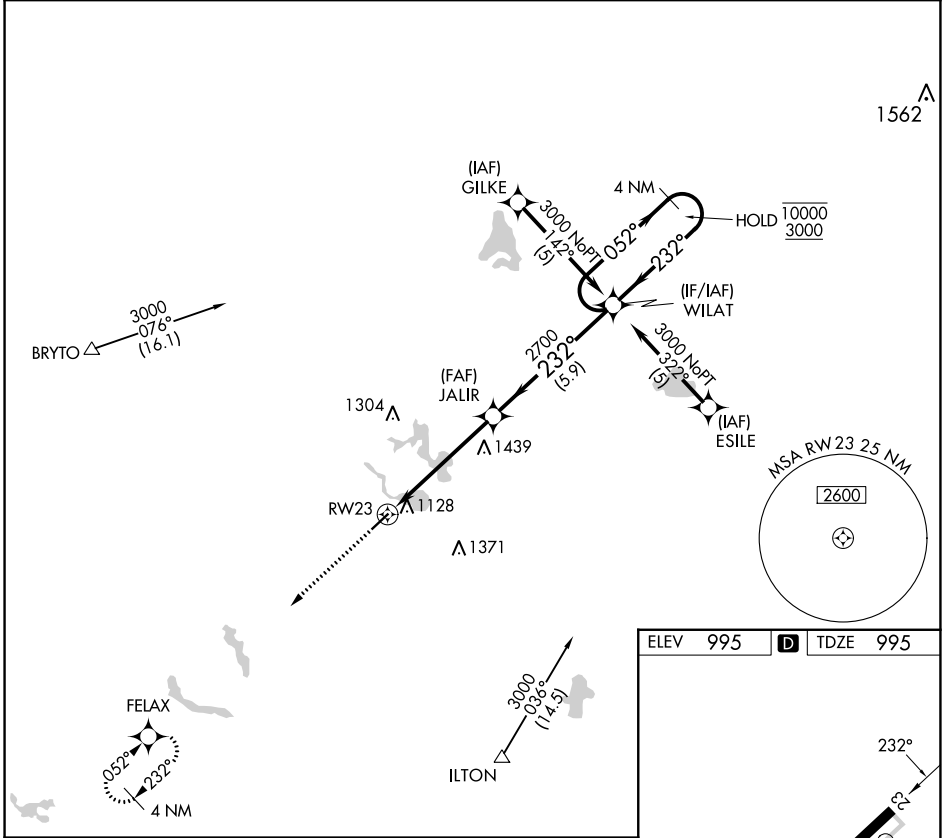

Visual Segment - Obstacles.		4 NM Holding Pattern	
3000	FELAX	JALIR	
↑	✧	WILAT	
RW23		052° → 10000	
		← 232° 3000	
5.2 NM		5.9 NM	
CATEGORY	A	B	C
LNAV MDA	1700-1	705 (800-1)	1700-2
			705 (800-2)
			NA

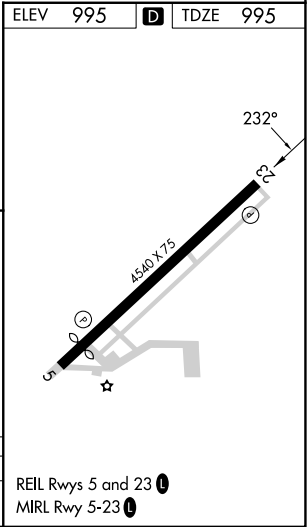


APP CRS	Rwy Idg	4000
052°	TDZE	990
	Apt Elev	995

RNAV (GPS) RWY 5

TRI-STATE STEUBEN COUNTY (ANQ)

RNP APCH.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 5 helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 3000 direct WILAT and hold.
-----------	--	---

AWOS-3 118.175	FORT WAYNE APP CON 127.2 284.6 (SW/NW) 132.15 284.6 (SE/NE)	UNICOM 123.075 (CTAF) 0
-------------------	---	----------------------------

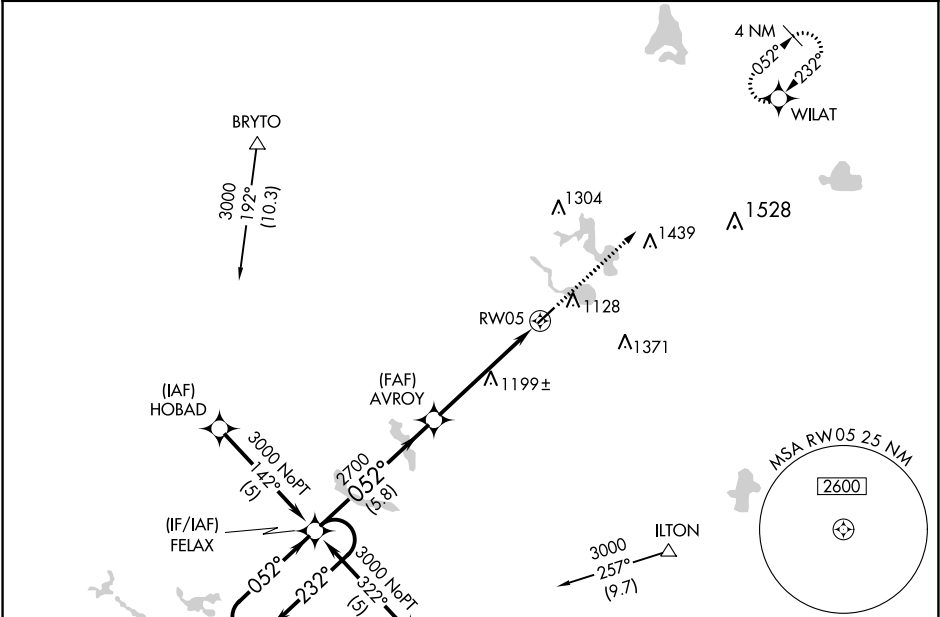

ELEV 995		D TDZE 990	
4 NM Holding Pattern		3000 WILAT	
GP 3.00° TCH 40		* LNAV only	
3000		2700	
232°		052°	
052°		1.4 NM to RWY 5	
5.8 NM		3.8 NM	
CATEGORY	A	B	C
LNAV/VNAV	DA	1474-1¾	484 (500-1¾)
LNAV MDA	1460-1	470 (500-1)	1460-1½
			470 (500-1½)
			NA