



WAAS CH 77809 W16A	APP CRS 163°	Rwy Idg 4301 TDZE 1803 Apt Elev 1803
--	------------------------	---

RNAV (GPS) RWY 16
AURORA MUNI-AL POTTER FIELD (AUH)

- T** Baro-VNAV NA when using Grand Island altimeter setting. For uncompensated Baro-VNAV systems, **A** LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Grand Island altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats visibility ¼ mile. VDP NA when using Grand Island altimeter setting.

MISSED APPROACH:
Climb to 3400 direct
EBWIX and hold.

AWOS-3 121.225	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
--------------------------	--	--

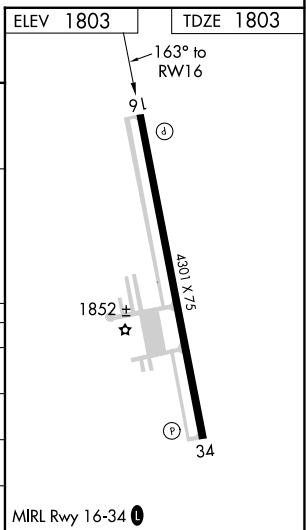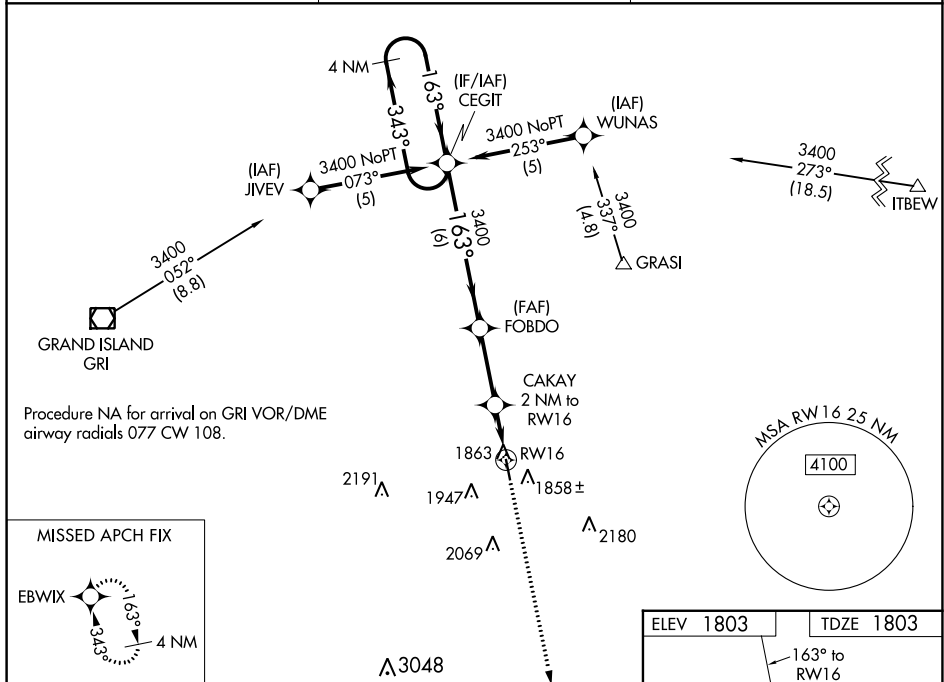

WAAS CH 87009 W34A	APP CRS 343°	Rwy Idg TDZE Apt Elev	4301 1801 1803
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 34

AURORA MUNI-AL POTTER FIELD (AUH)


▼

▲

Baro-VNAV NA when using Grand Island altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Grand Island altimeter setting and increase all DA 41 feet and all MDA 60 feet. VDP NA when using Grand Island altimeter setting.

MISSED APPROACH:
Climb to 3400 direct CEGIT and hold.

AWOS-3 121.225	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

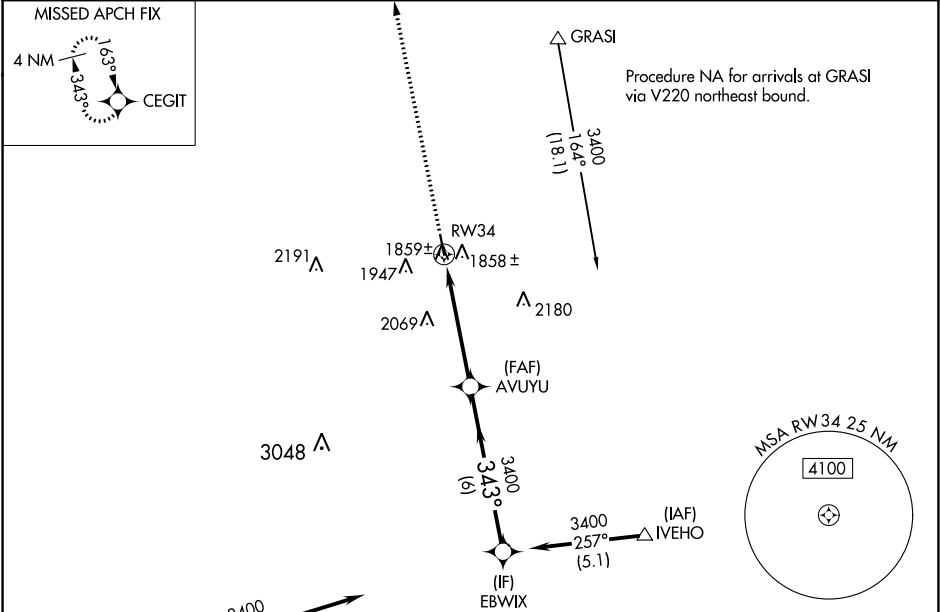

ELEV 1803

TDZE 1801

3400

CEGIT

*LNAV only

*1.3 NM to RW34

AVUYU

EBWIX

Procedure Turn NA

3400

343°

GP 3.00°

TCH 40

1.3 NM

3.5 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	2051-1	250 (300-1)	NA	
LNAV/VNAV DA	2129-1¼	328 (400-1¼)	NA	
LNAV MDA	2260-1	459 (500-1)	NA	
CIRCLING	2300-1 497 (500-1)	2340-1 537 (600-1)	NA	

91

1852±

4301 X 75

34

343° to RW34

MIRL Rwy 16-34 0

