


COCOA BEACH, FLORIDA

ILS or LOC Rwy 21

PATRICK SFB (KCOF)


AL-38 [USAF]

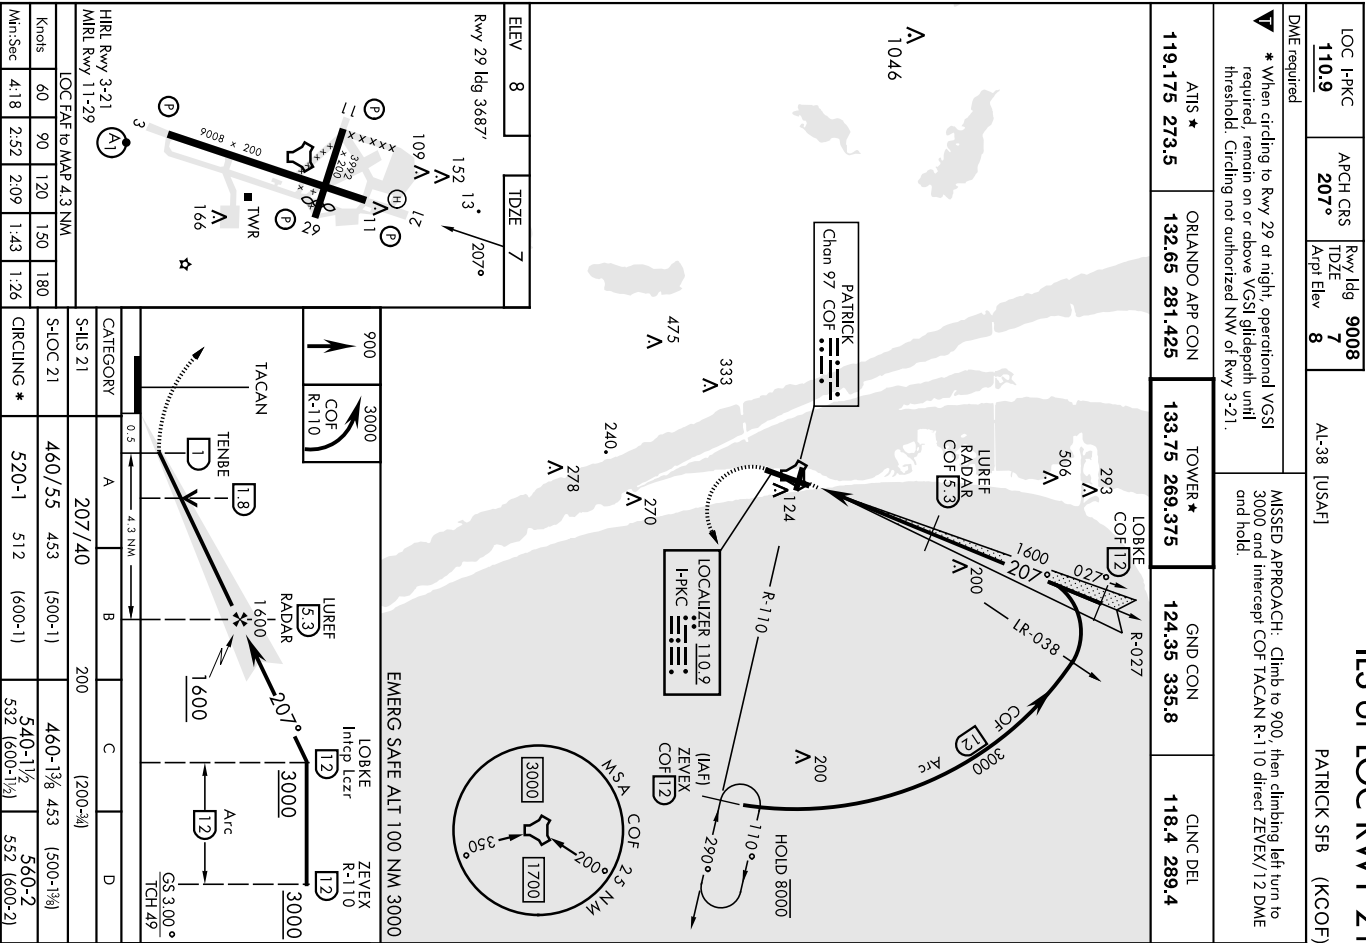

ILS or LOC Rwy 3

LOC I-COF	APCH CRS	Rwy Idg	TDZE	Appt Elev	AL-38 [USAF]	PATRICK SFB (KCOF)	
109.1	027°	9008	5	8			
DME required						ALSF-1	MISSED APPROACH: Climb to 600, then climbing right turn to 3000 and intercept COF TACAN R-110 direct ZEVEK/COF 1.2 DME and hold.
*** When ALS inop, increase RVR to 40 and vis to ½ mile. ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile. CAT CD vis to 1 ½ miles. *** Circling not authorized NW of Rwy 3-21. When Rwy 29 VGSi inop, circling to Rwy 29 NA or night. When circling to Rwy 29 at night, operational VGSi required, remain on or above VGSi glidepath until threshold.							

ATIS *	ORLANDO APP CON	TOWER *	GND CON	CINC DEL
119.175 273.5	132.65 281.425	133.75 269.375	124.35 335.8	118.4 289.4

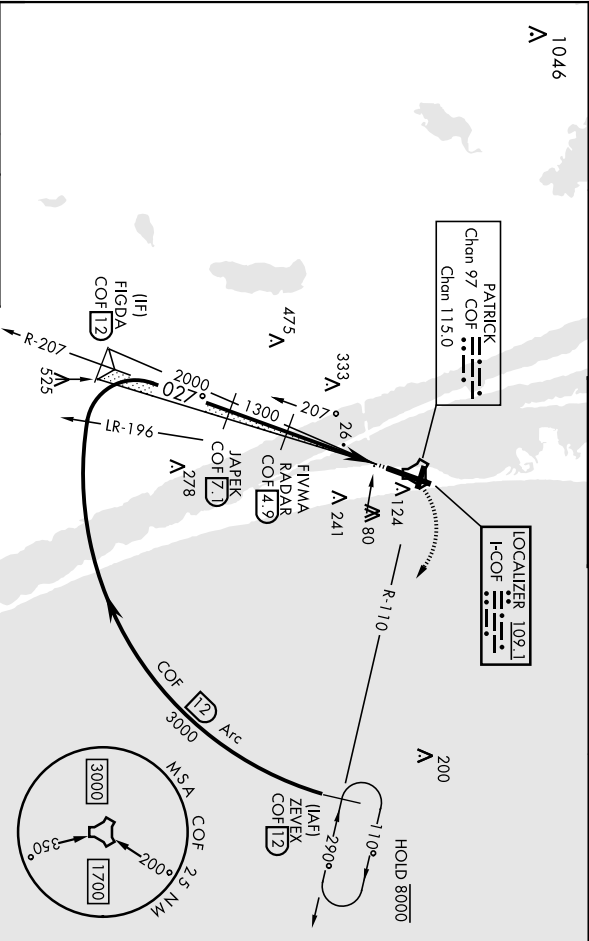

ELEV	8	TDZE	5		
Rwy 29 Idg 3687'					
HIRL Rwy 3-21					
MIRL Rwy 11-29					
152 A					
109 A 12					
9008 x 200					
396 x 200					
TWR					
166					
027°					
A1					
LOC FAF to MAP 3.4 NM					
Knots	60	90	120	150	180
Min/Sec	3.24	2.16	1.42	1.22	1.08
CATEGORY					
S-LOC 3 **					
S-LOC 3 **					
CIRCLING ***					
G					
EMERG SAFE ALT 100 NM 3000					
ZEVEK R-110					
FICDA Intcp Lczt					
JAPK Z-1					
FIMMA Z-1					
RADAR					
GERRE T-5					
TACAN					
COF R-110					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000					
600					
3000					
COF					
3000</					


APCH CRS	Rwy Idg	9008
207°	TDZE	7
	Arprt Elev	8

AL-38 (USAF)

PATRICK SFB (KCOF)

RNP APCH-GPS	MISSED APPROACH: Climb to 900 then climbing left turn to 3000 direct ZEVEX and hold.
* Circling NA NW of RWY 3-21.	


ATIS 119.175 273.5	ORLANDO APP CON/DEP CON 132.65 281.425	TOWER 133.75 269.375	GND CON 124.35 335.8	CLNC DEL 118.4 289.4
-----------------------	---	-------------------------	-------------------------	-------------------------

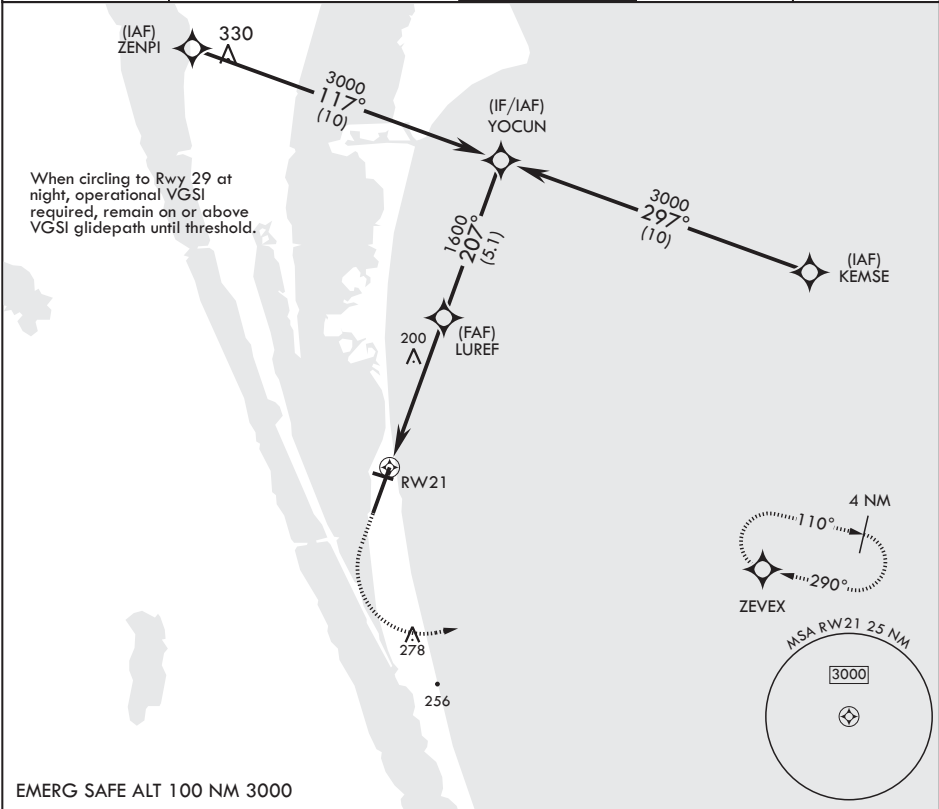

EMERG SAFE ALT 100 NM 3000

900	3000	ZEVEX	YOCUN					ELEV 8	TDZE 7
RWY 21		1.3 NM to RWY 21		LUREF		3000		Rwy 29 Idg 3687'	
RWY 21		4.8 NM		1600		207°		3992 x 200	
CATEGORY		A		B		C		D	
LNAV MDA		460/55		453 (500-1)		460-1½		453 (500-1½)	
CIRCLING*		520-1		512 (600-1)		540-1½		580-2	
						532 (600-1½)		552 (600-2)	
								572 (600-2)	

TACAN Rwy 21

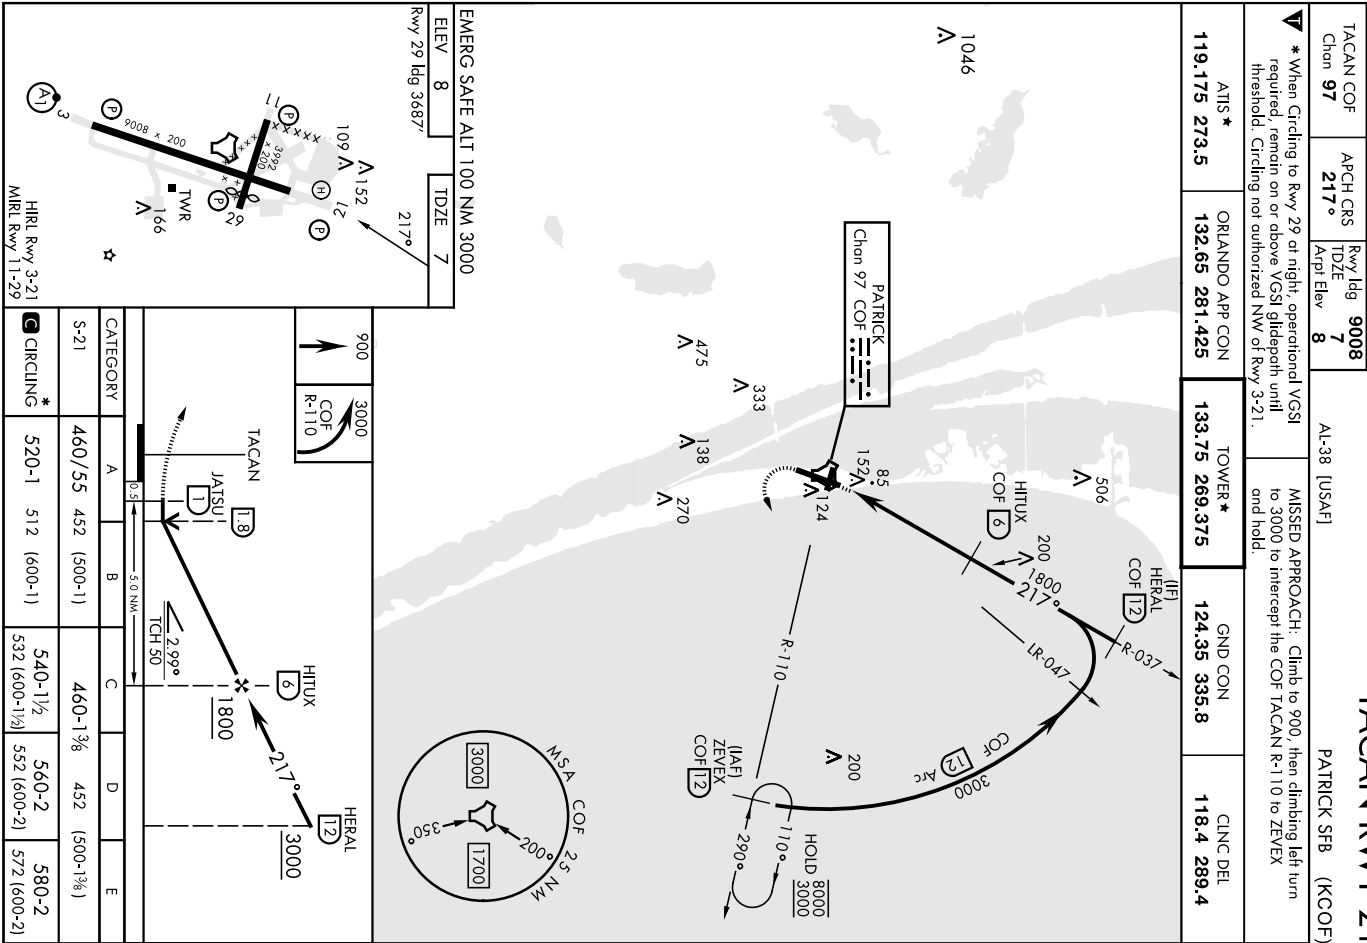


TACAN Rwy 3

TACAN COF		APCH CRS	Rwy Idg	9008	PATRICK SFB (KCOF)	
Chon 97	020°	TDZE	5		AL-38 [USAF]	
		Appt Elev	8			
* When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1½ miles.					ALSF-1	MISSED APPROACH: Climb to 600', then climbing right turn to 3000 and intercept COF TACAN R-110 to ZEVEV/12 DME and hold, continue climb in hold to 3000.
** Circling not authorized NW of Rwy 3-21.						

ATIS *	ORLANDO APP CON	TOWER *	GND CON	CLNC DEL
119.175 273.5	132.65 281.425	133.75 269.375	124.35 335.8	118.4 289.4


** When circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

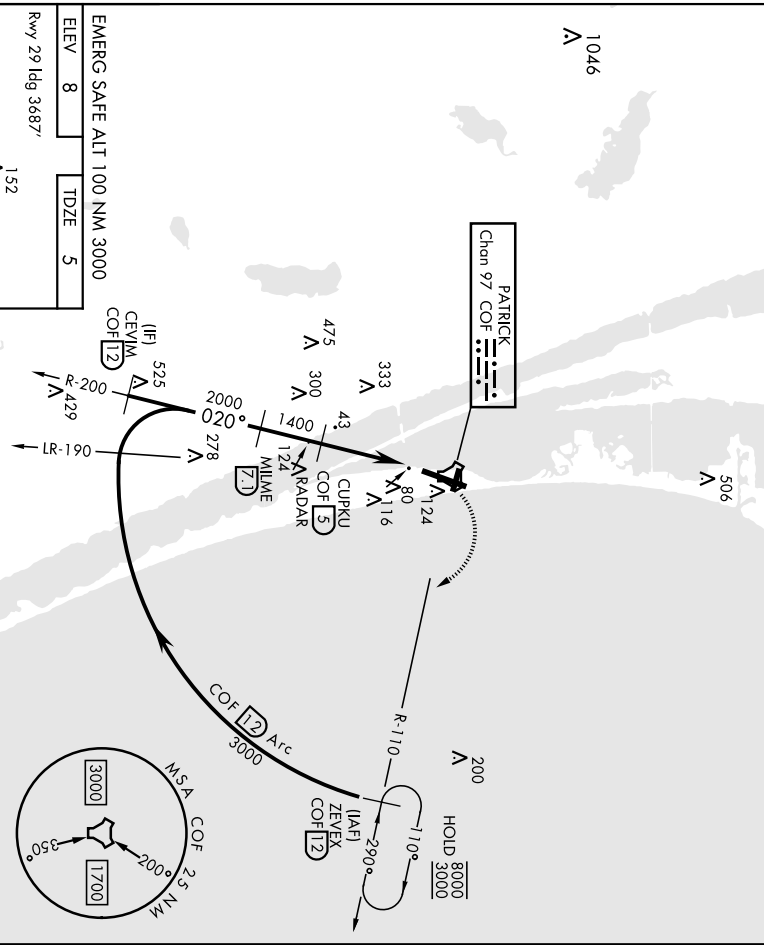

EMERG SAFE ALT 100 NM 3000

ELEV	8	TDZE	5
------	---	------	---

Rwy 29 Idg 3687'

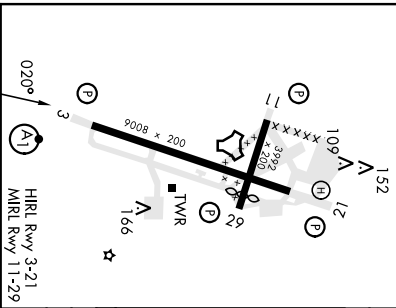

CATEGORY	A	B	C	D	E
S-03 *	520/24	515 (600-½)	520/55	515 (600-1)	
CIRCLING **	520-1	512 (600-1)	540-1½	560-2	580-2
			532 (600-1½)	552 (600-2)	572 (600-2)

Cocoa Beach, Florida

Arndt 5 02NOV23

TACAN Rwy 3