

CLTCH THREE DEPARTURE (RNAV)
(CLTCH3.CLTCH) 31DEC20

FORT BELVOIR, VIRGINIA
DAVISON AAF (DAA)

ATIS
128.175
CLNC DEL
351.8
GND CON
121.9 351.8
DAVISON TOWER ★
124.275 (CTAF) 229.4
POTOMAC DEP CON
118.95 257.2



DEPARTURE ROUTE DESCRIPTION


Climb on heading assigned by ATC, expect RADAR vectors to BUTRZ, then on track 239° to CLTCH, thence....

....on assigned transition, maintain altitude assigned by ATC, expect clearance to filed altitude within ten (10) minutes after departure.

FLASK TRANSITION (CLTCH3.FLASK)
MAULS TRANSITION (CLTCH3.MAULS)

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbo-jets only.

TOP ALTITUDE:
3000

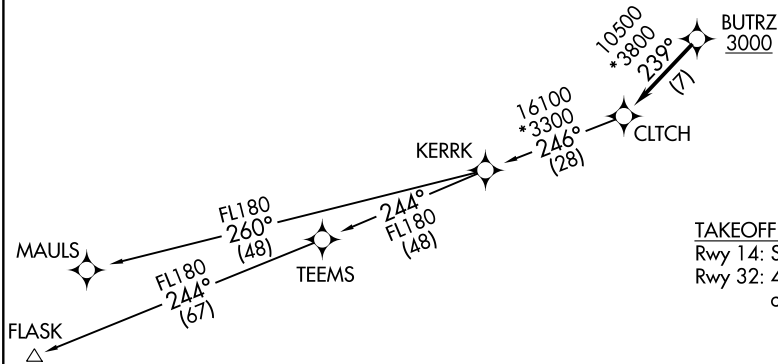

TAKEOFF MINIMUMS:

Rwy 14: Standard.
Rwy 32: 400-2 or Standard with minimum climb of 300' per NM to 500.

NOTE: Chart not to scale.

(CLTCH3.CLTCH) 22251
CLTCH THREE DEPARTURE (RNAV)

AL-5504 (FAA)



DAVISON AAF (DAA)
FORT BELVOIR, VIRGINIA

ATIS
128.175
CLNC DEL
351.8
GND CON
121.9 351.8
DAVISON TOWER ★
124.275 (CTAF) 229.4
POTOMAC DEP CON
118.95 257.2

TOP ALTITUDE:
3000

TAKEOFF MINIMUMS:

Rwy 14: Standard.
Rwy 32: 400-2 or standard with minimum
climb of 300' per NM to 500.

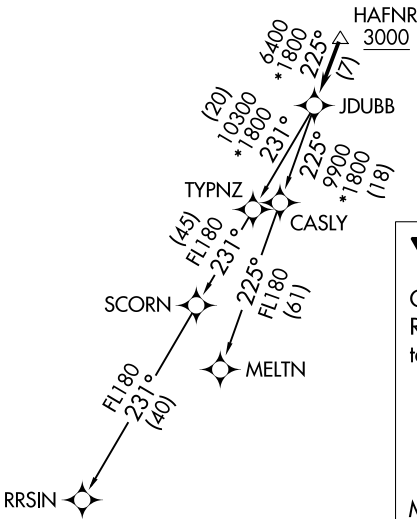

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbo-jets only.

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, expect
RADAR vectors to HAFNR, then on track 225°
to JDUBB, thence....

....on assigned transition, maintain 3000,
expect clearance to filed altitude within
ten (10) minutes after departure.

MELTN TRANSITION (JDUBB4.MELTN)
RRSIN TRANSITION (JDUBB4.RRSIN)

NOTE: Chart not to scale.

SCRAM SIX DEPARTURE (RNAV)
(SCRAM6.SCRAM) 31 DEC 20

FORT BEVOIR, VIRGINIA
DAVISON AAF (DAA)

ATIS
128.175
CLNC DEL
351.8
GND CON
121.9 351.8
DAVISON TOWER ★
124.275 (CTAF) 229.4
POTOMAC DEP CON
118.95 257.2




DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, expect RADAR vectors to POOCH, then on track 240° to SCRAM, thence....

....as depicted. Maintain 3000, expect clearance to filed altitude within ten (10) minutes after departure.

GLANC TRANSITION (SCRAM6.GLANC):

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbo-jets only.

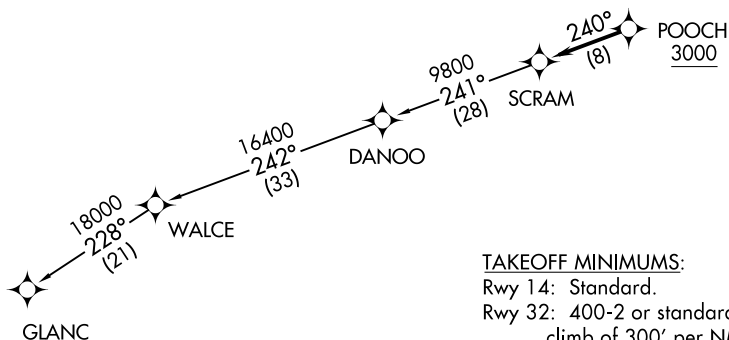

TAKEOFF MINIMUMS:

Rwy 14: Standard.
Rwy 32: 400-2 or standard with minimum
climb of 300' per NM to 500.

TOP ALTITUDE:
3000

P-56B



NOTE: Chart not to scale.

(SCRAM6.SCRAM) 22251
SCRAM SIX DEPARTURE (RNAV)

AL-5504 (FAA)

DAVISON AAF (DAA)
FORT BEVOIR, VIRGINIA