

LOC/DME I-EAU	APP CRS	Rwy Idg	7301
109.5	224°	TDZE	913
Chan 32		Apt Elev	913

ILS or LOC RWY 22

CHIPPEWA VALLEY RGNL (EAU)

From DRDAN and MENRD RNAV-1 GPS required.
DME or RADAR required.


⚠

For inop ALS increase S-LOC 22 Cat C and D visibility to ¾ SM. For inop ALS when using Rice Lake altimeter setting, increase S-ILS 22 all Cats visibility to 1 SM. When local altimeter setting not received, use Rice Lake altimeter setting and increase DA 110 feet and all MDA 120 feet, increase S-LOC 22 Cat C and D and Circling Cat C visibility ¼ SM. VDP NA when using Rice Lake altimeter setting.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 3500 on EAU VORTAC R-047 to IROKE/I-EAU LOC/DME 13.4 DME/RADAR and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

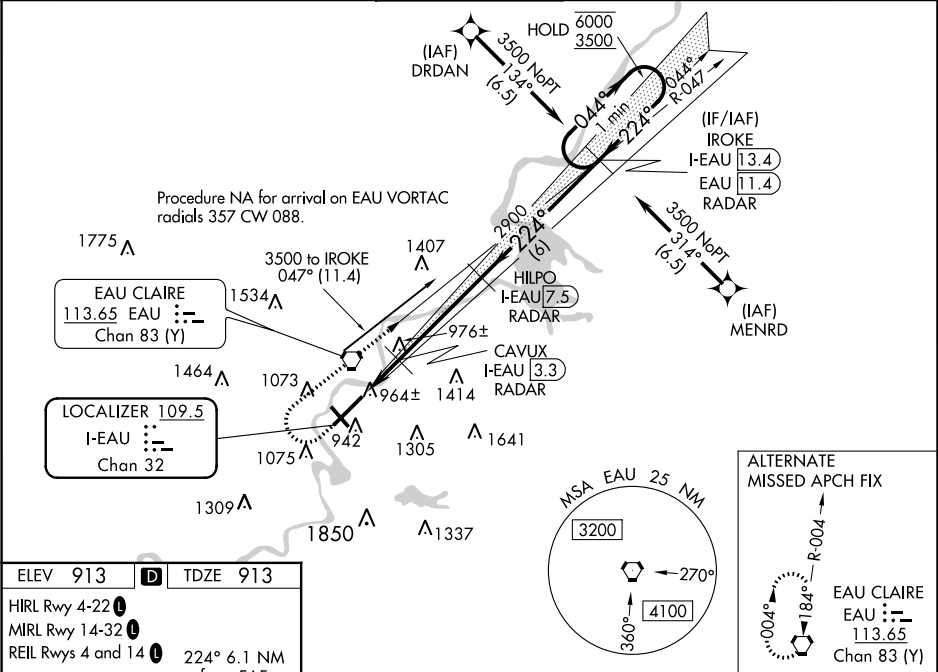

ELEV 913 **D** TDZE 913

HIRL Rwy 4-22

MIRL Rwy 14-32

REIL Rwy 4 and 14

224° 6.1 NM from FAF

TWR 968

941

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

1600 ↑	3500 ↻ EAU R-047	IROKE I-EAU 13.4 RADAR	Use I-EAU DME when on the localizer course.		One Minute Holding Pattern	
* LOC only			CAVUX I-EAU 3.3 RADAR	HILPO I-EAU 7.5 RADAR	IROKE I-EAU 13.4 RADAR	

LOC/DME I-EAU
109.5
Chan 32

APP CRS
044°

Rwy Idg
TDZE
Apt Elev
7701
889
913

LOC BC RWY 4
CHIPPEWA VALLEY RGNL (EAU)


▼

▲

DME required. VDP NA with Rice Lake Rgnl/Carl's Fld airport altimeter setting. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld airport altimeter setting increase all MDA 120 feet, increase S-4 Cats C and D and Circling Cat C visibility ¼ mile. Circling Rwy 32 NA at night.

MISSED APPROACH: Climb to 2900 then left turn direct EAU VORTAC and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

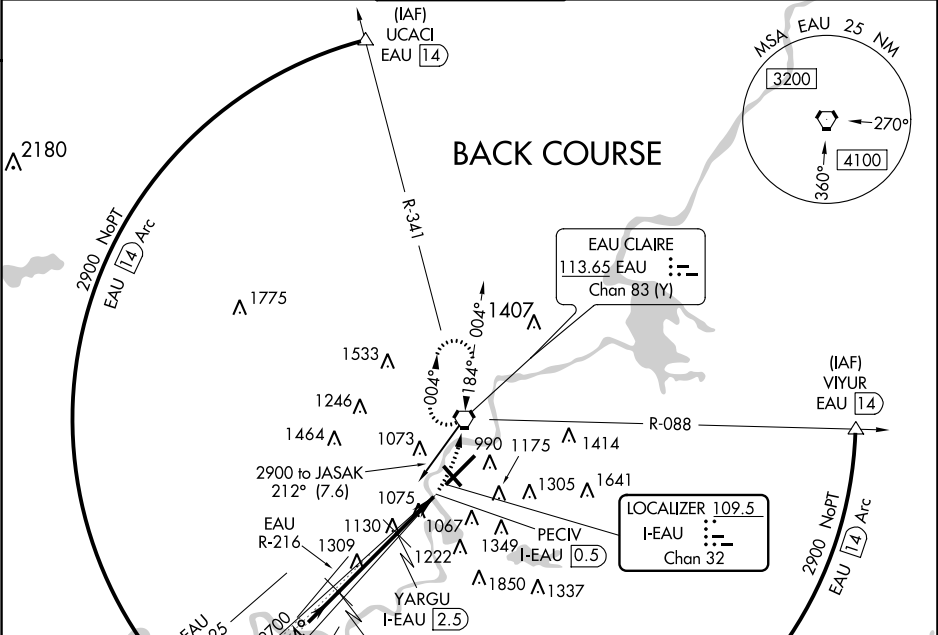

Remain within 10 NM

JASAK I-EAU 5.4

Use I-EAU DME when on the localizer course.

YARGU I-EAU 2.5

2900

EAU

2700

Disregard GS indications.

3.00° TCH 44

1740

3 NM

1.2 NM

0.8 NM

0.6 NM

CATEGORY	A	B	C	D
S-4	1380-1	491 (500-1)	1380-1¾	491 (500-1¾)
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)

ELEV 913

TDZE 889

3500 X 100

8101 X 150 - 0.6% DOWN

TWR 968

941

32

HIRL Rwy 4-22 0
MIRL Rwy 14-32 0
REIL Rwy 4 and 14 0

WAAS CH 87006 W22A	APP CRS 224°	Rwy Idg 7301 TDZE 913 Apt Elev 913
--	------------------------	---

RNAV (GPS) RWY 22
CHIPPEWA VALLEY RGNL (EAU)


RNP APCH.

T Baro-VNAV and VDP NA when using Rice Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Rice Lake altimeter setting and increase LPV DA to 1223, LNAV/VNAV DA to 1285, and increase LNAV/VNAV visibility all Cats ¼ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM. For inop ALS increase LNAV/VNAV visibility all Cats to ¾ SM and LNAV Cats C/D visibility to 1 SM. For inop ALS when using Rice Lake altimeter setting increase LPV visibility all Cats to 1 SM and LNAV Cats C/D visibility to 1 ¾ SM.

MALSR

MISSED APPROACH:
Climb to 1320 then
climbing right turn to
3500 direct IROKE
and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
-----------------	-----------------------------------	--	--------------------	------------------

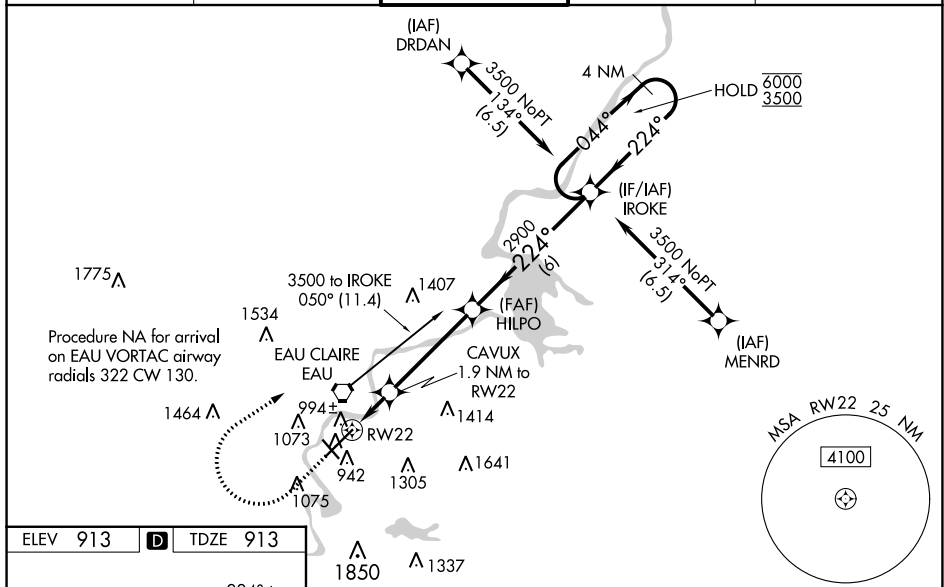[illegible]

RNAV (GPS) RWY 22

WAAS CH 69217 W04A	APP CRS 044°	Rwy Idg TDZE Apt Elev	7701 889 913
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

CHIPPEWA VALLEY RGNL (EAU)



⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ¾ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

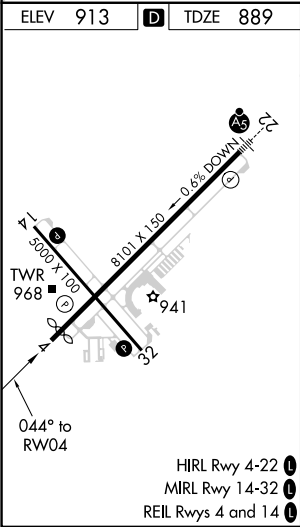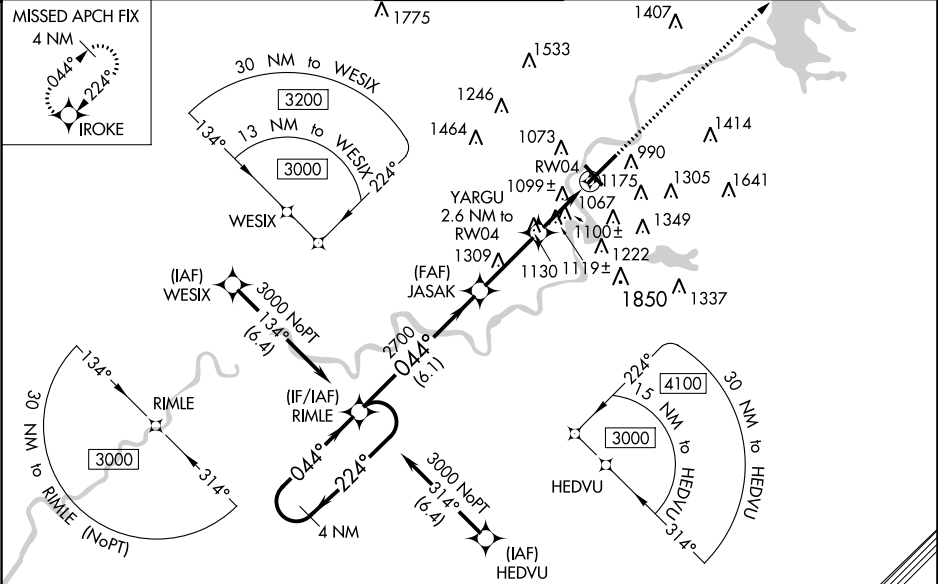

ELEV 913 D TDZE 889				
4 NM Holding Pattern RIMLE				
3000 ← 224° → 044° →				
GP 3.00° TCH 44				
JASAK 2700 YARGU 2.6 NM to RW04				
*1740 *1.3 NM to RW04				
6.1 NM 3 NM 1.3 NM 1.3 NM				
CATEGORY	A	B	C	D
LPV DA	1089-¾ 200 (200-¾)			
LNAV/VNAV DA	1379-1½ 490 (500-1½)			
LNAV MDA	1360-1	471 (500-1)	1360-1¾	471 (500-1¾)
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)



VORTAC EAU	APP CRS	Rwy ldg	N/A
113.65	184°	TDZE	N/A
Chan 83 (Y)		Apt Elev	913

VOR-A

CHIPPEWA VALLEY RGNL (EAU)

▼ ▲ Visibility reduction by helicopters NA. When local altimeter setting not received, use Rice Lake altimeter setting and increase all MDA 120 feet, increase Circling Cat A and B visibility ¼ mile and Cat C visibility ½ mile.	MISSED APPROACH: Climb to 2900 then left turn direct EAU VORTAC and hold.
---	---

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

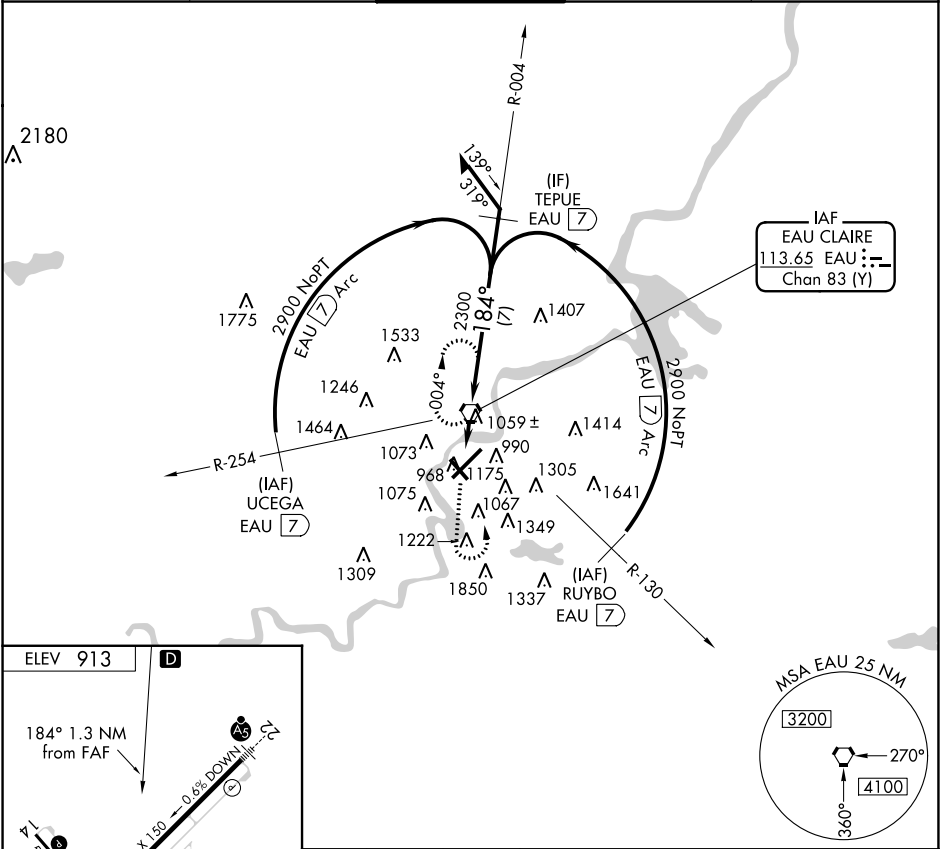

FAF to MAP 1.3 NM						CATEGORY	A	B	C	D
Knots	60	90	120	150	180					
Min:Sec	1:18	0:52	0:39	0:31	0:26	CIRCLING	1780-1 867 (900-1)	1780-1¼ 867 (900-1¼)	1780-2½ 867 (900-2½)	2200-3 1287 (1300-3)