

ILS RWY 16 (SA CAT I & II)
NORTHWEST FLORIDA BEACHES INTL (ECP)

MAISR

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 on heading 025° and on MAI VORTAC R-237 to OLISS INT/MAI 33 DME and hold, continue climb-in-hold to 4000.

CATEGORY	A	B	C	D
S-ILS 16	SA CAT I	RA 151/14	150	DA 219
S-ILS 16	SA CAT II	RA 101/12	100	DA 169

SA CATEGORY I & II ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED

LOC/DME I-PUK 111.15 Chan 48 (Y)	APP CRS 162°	Rwy Idg TDZE Apt Elev 10000 69 69
--	------------------------	---




ILS or LOC RWY 16
NORTHWEST FLORIDA BEACHES INTL (ECP)

DME required for procedure entry. DME required.

- ▼ For inop ALS, increase S-LOC 16 Cat C/D visibility to RVR 5500.
- ▲ #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSRL MISSED APPROACH: Climb to 600 then climbing left turn to 4000 on heading 025° and on MAI VORTAC R-237 to OLISS INT/MAI 33 DME and hold, continue climb-in-hold to 4000.

ATIS 119.975	TYNDALL APP CON★ 125.2 (N above 5000')	PANAMA CITY TOWER★ 118.95 (CTAF) 0	GND CON 121.65
------------------------	--	---	--------------------------

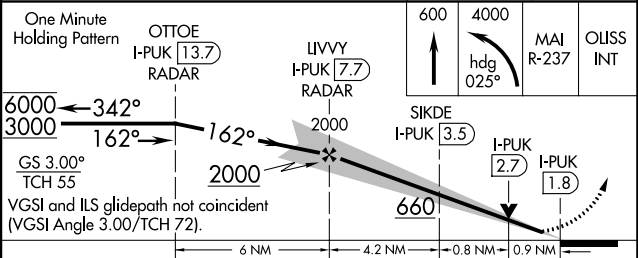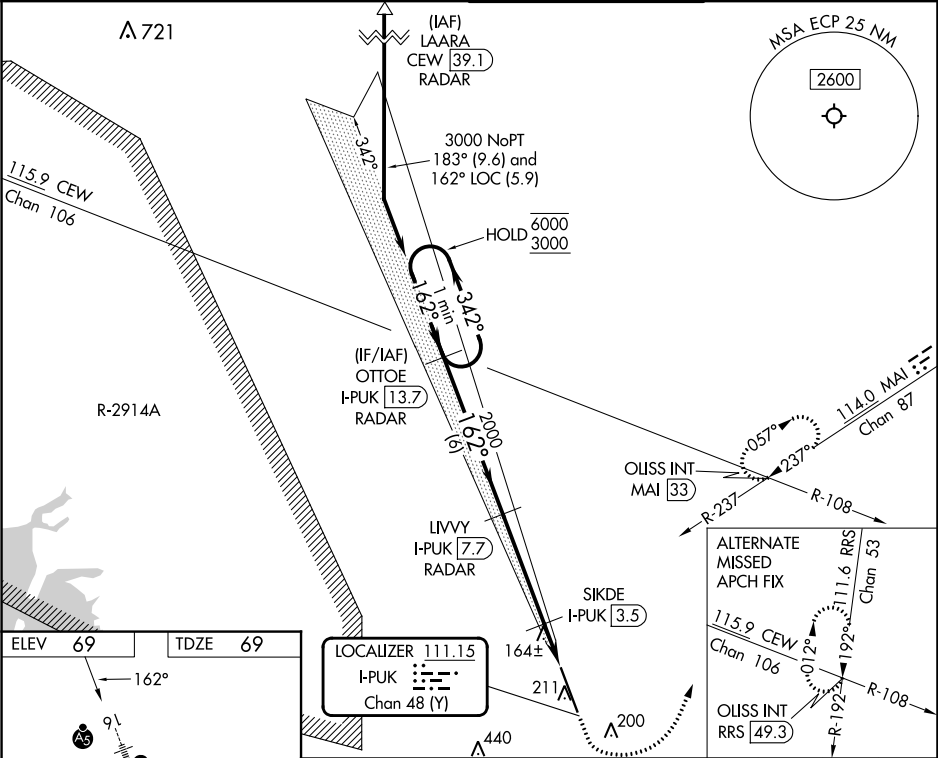

CATEGORY	A	B	C	D
S-ILS 16 #	269/24 200 (200-½)			
S-LOC 16	440/24	371 (400-½)	440/35	371 (400-¾)
CIRCLING	520-1	451 (500-1)	520-1½ 451 (500-1½)	620-2 551 (600-2)

WAAS CH 63017 W16A	APP CRS 162°	Rwy Idg 10000 TDZE 69 Apt Elev 69
--	------------------------	--

RNAV (GPS) RWY 16

NORTHWEST FLORIDA BEACHES INTL (ECP)



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Destin altimeter setting and increase all DA 88 feet, increase all MDA 100 feet, and increase LNAV/VNAV all Cats visibility and LNAV Cat C and D visibility ¾ mile. Baro-VNAV and VDP NA when using Destin altimeter setting. For inop MALSR, increase LNAV Cat C and D visibility to 1 mile. For inop MALSR when using Destin altimeter setting, increase all LPV visibility to ¾ mile, increase all LNAV/VNAV visibility to 1¾ mile, and increase LNAV Cat C and D visibility to 1¾ mile.


MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 4000 direct SCARE and hold, continue climb-in-hold to 4000.

ATIS 119.975	TYNDALL APP CON★ 125.2 (N above 5000')	PANAMA CITY TOWER★ 118.95 (CTAF) 0	GND CON 121.65
------------------------	--	---	--------------------------

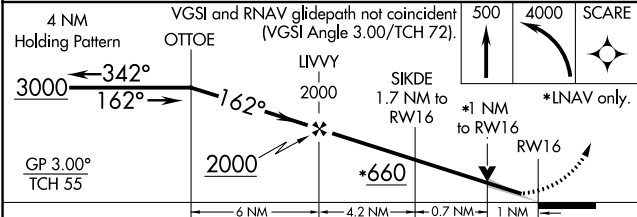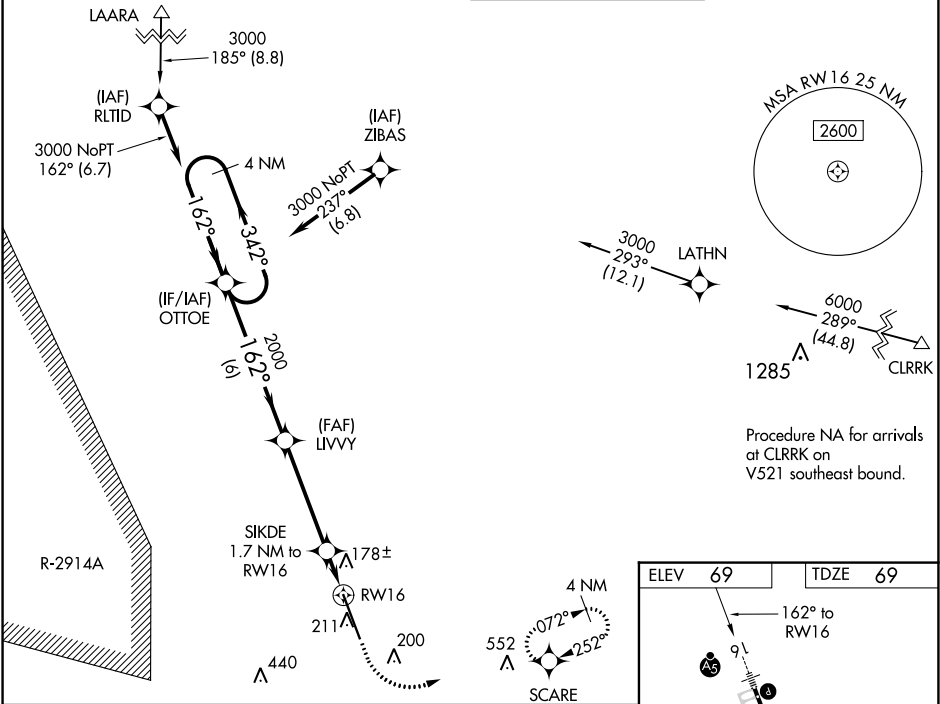

CATEGORY	A	B	C	D
LPV DA		269-½	200 (200-½)	
LNAV/ VNAV DA		478-¾	409 (500-¾)	
LNAV MDA	440-½	371 (400-½)	440-⅝	371 (400-⅝)
CIRCLING	520-1	451 (500-1)	520-1½	620-2
			451 (500-1½)	551 (600-2)

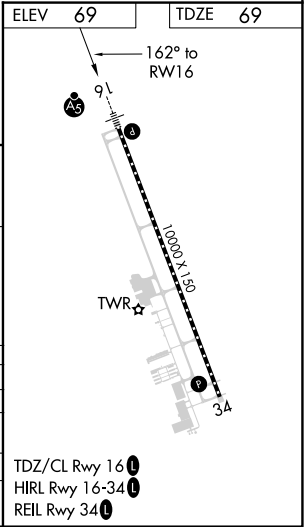

WAAS CH 93817 W34A	APP CRS 342°	Rwy Idg 10000 TDZE 62 Apt Elev 69
--	------------------------	--

RNAV (GPS) RWY 34

NORTHWEST FLORIDA BEACHES INTL (E/C/P)



▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Destin altimeter setting and increase all DA 88 feet, increase all MDA 100 feet, increase LPV all Cats visibility ⅓ mile, increase LNAV/VNAV all Cats visibility ⅓ mile, and increase LNAV Cat C and D visibility ⅓ mile. Baro-VNAV and VDP NA with Destin altimeter setting.

MISSED APPROACH: Climb to 4000 direct HOSBY and on track 013° to HUUPP and hold, continue climb-in-hold to 4000.

ATIS 119.975	TYNDALL APP CON★ 125.2 (N above 5000')	PANAMA CITY TOWER★ 118.95 (CTAF) 0	GND CON 121.65
------------------------	--	---	--------------------------

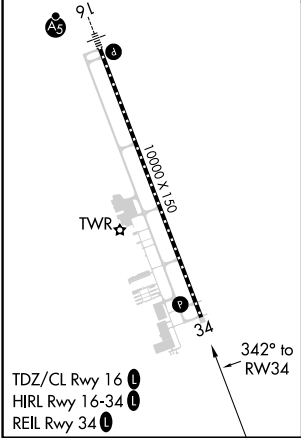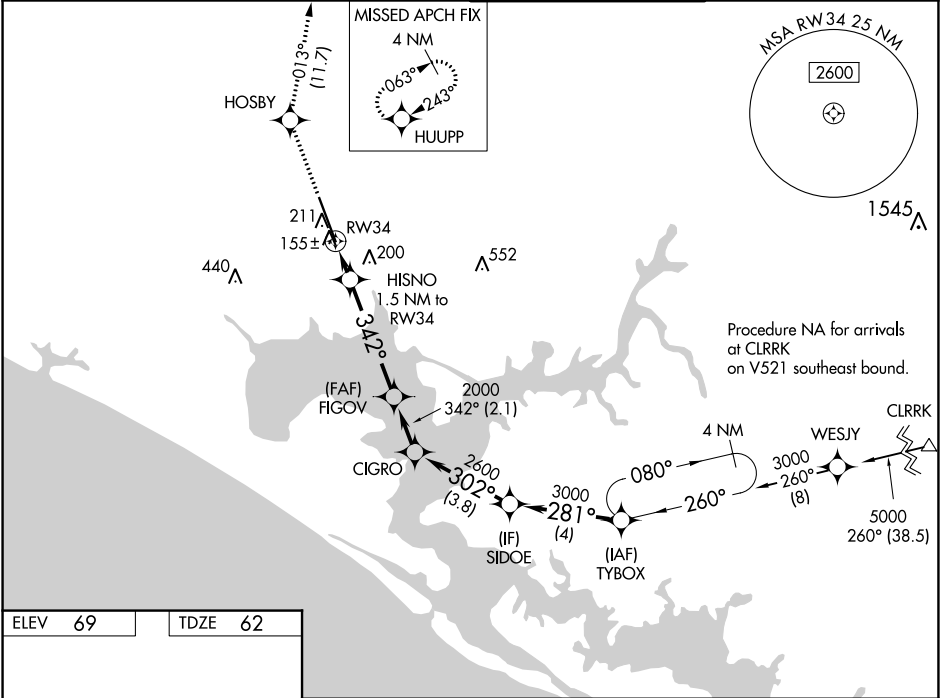

4000	HOSBY	tr 013°	HUUPP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 86).			
*LNAV only.				HISNO 1.5 NM to RW34	FIGOV 2000	CIGRO 2600	SIDOE 3000
*0.9 NM to RW34				*580	2000	2600	GP 3.00° TCH 55
0.9				0.6	4.4 NM	2.1 NM	3.8 NM
CATEGORY				A	B	C	D
LPV DA				262-3/4 200 (200-3/4)			
LNAV/VNAV DA				344-7/8 282 (300-7/8)			
LNAV MDA				420-1 358 (400-1)			
CIRCLING				520-1 451 (500-1)	520-1 1/2 451 (500-1 1/2)	620-2 551 (600-2)	

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024