WAAS CH 77909 W27A	APP CRS 269°	Rwy Idg 5503 TDZE 387 Apt Elev 387

RNAV (GPS) RWY 27
HENDERSON CITY-COUNTY (EHR)

RNP APCH.

Baro-VNAV NA when using Evansville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Evansville altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C/D visibilities ¼ mile.

MISSED APPROACH: Climb to 2500 direct BIKME and hold.

AWOS-3PT	EVANSVILLE APP CON ★	UNICOM
118.85	124.025 257.8	122.8 (CTAF) L

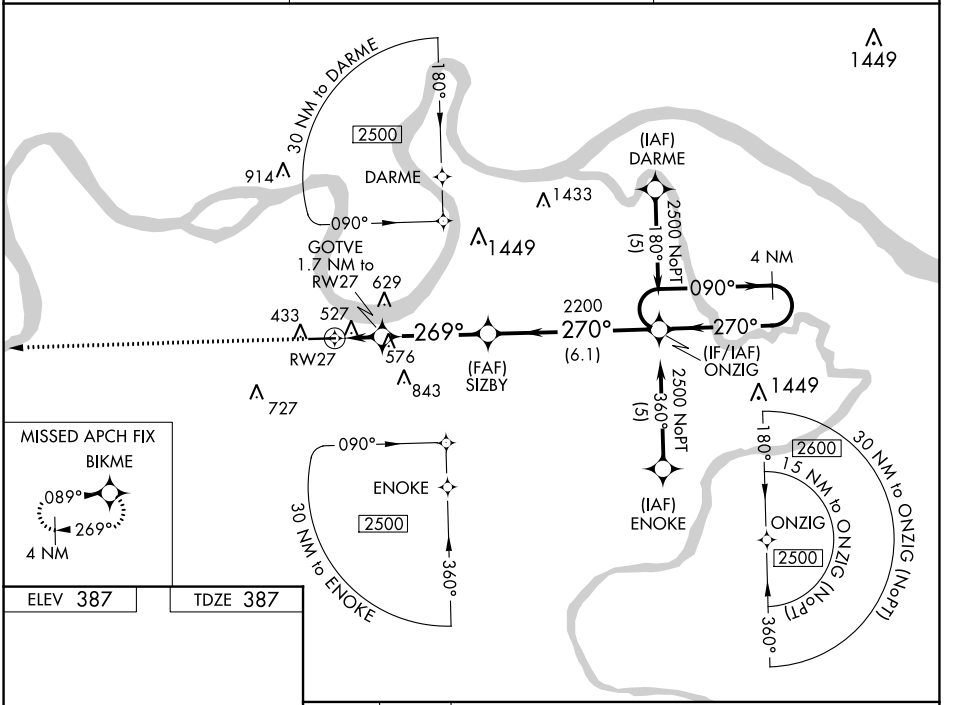



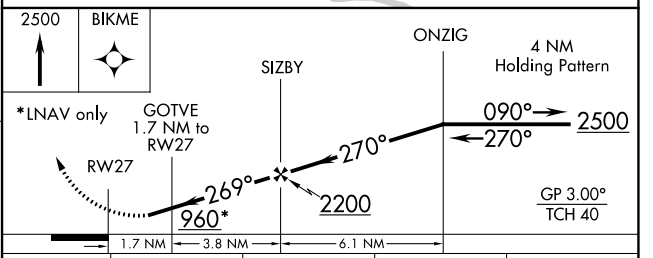

CATEGORY	A	B	C	D
LPV DA	733-1¼ 346 (400-1¼)			
LNAV/VNAV DA	827-1½ 440 (500-1½)			
LNAV MDA	840-1 453 (500-1)		840-1⅜ 453 (500-1⅜)	840-1½ 453 (500-1½)

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH 97709 W09A	APP CRS 089°	Rwy Idg 5503 TDZE 385 Apt Elev 387

RNAV (GPS) RWY 9
HENDERSON CITY-COUNTY (EHR)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48° C. Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Evansville altimeter setting. When local altimeter setting not received, use Evansville altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C/D visibilities ¼ mile.

MISSED APPROACH: Climb to 2500 direct ONZIG and hold.

AWOS-3PT	EVANSVILLE APP CON ★	UNICOM
118.85	124.025 257.8	122.8 (CTAF) L

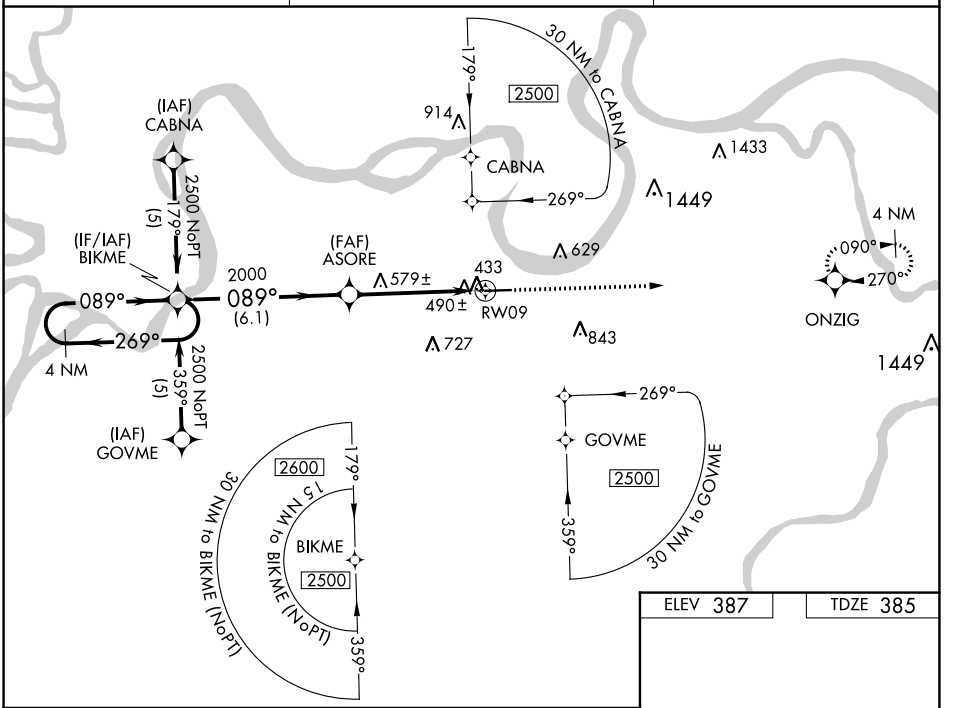

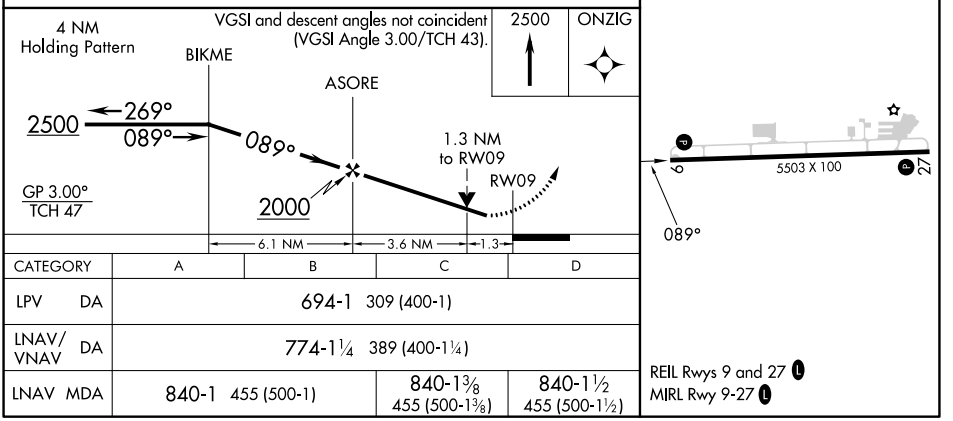

CATEGORY	A	B	C	D
LPV DA	694-1 309 (400-1)			
LNAV/VNAV DA	774-1¼ 389 (400-1¼)			
LNAV MDA	840-1 455 (500-1)		840-1⅜ 455 (500-1⅜)	840-1½ 455 (500-1½)

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024

VOR-A

HENDERSON CITY-COUNTY (EHR)

VORTAC PXV	APP CRS	Rwy Idg	N/A
113.3	150°	TDZE	N/A
Chan 80		Apt Elev	387

When local altimeter setting not received, use Evansville altimeter setting and increase all MDAs 80 feet, and increase Circling Cats C/D visibility ¼ SM.

NA

MISSED APPROACH: Climbing right turn to 2100 direct PXV VORTAC and hold.

AWOS-3PT	EVANSVILLE APP CON ★	UNICOM
118.85	124.025 257.8	122.8 (CTAF) L

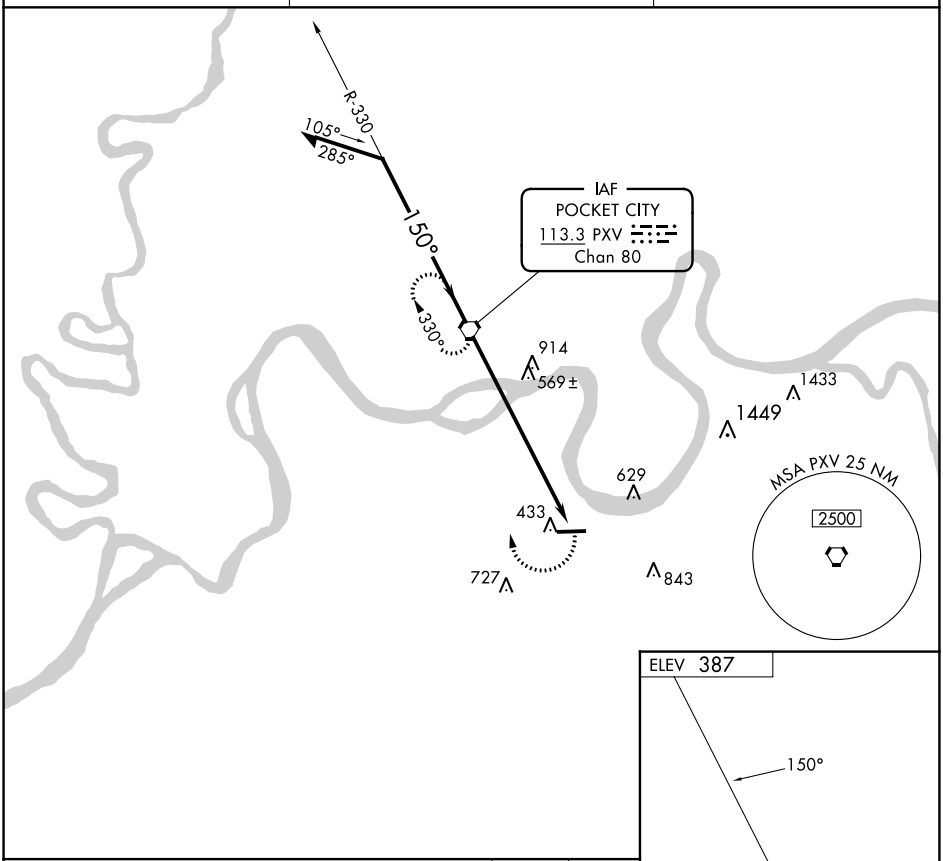

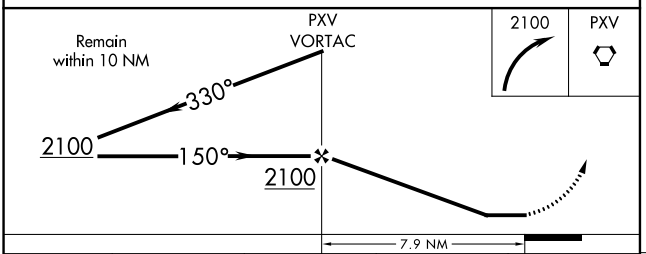

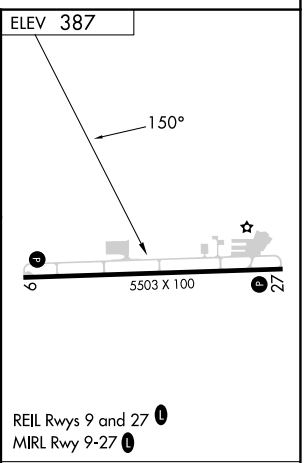

CATEGORY	A	B	C	D
CIRCLING	920-1	533 (600-1)	1040-1¾ 653 (700-1¾)	1200-2¾ 813 (900-2¾)

FAF to MAP 7.9 NM

Knots	60	90	120	150	180
Min:Sec	7:54	5:16	3:57	3:10	2:38

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024