

WAAS CH 86827 W12A	APP CRS 120°	Rwy Idg TDZE 1452 Apt Elev 1456
--	------------------------	---

RNAV (GPS) RWY 12

ELY MUNI (ELO)


▼

▲

Baro-VNAV NA when using Cook altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 34°C (93°F). DME/DME RNP-0.3 NA. VDP NA when using Cook altimeter setting. When local altimeter setting not received, use Cook altimeter setting and increase all DA/MDA 100 feet; increase LPV visibility ¼ mile all Cats, LNAV/VNAV visibility ⅜ mile all Cats, and LNAV Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 4100 direct ODASE and hold.

AWOS-3PT 132.025	MINNEAPOLIS CENTER 127.9 281.45	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

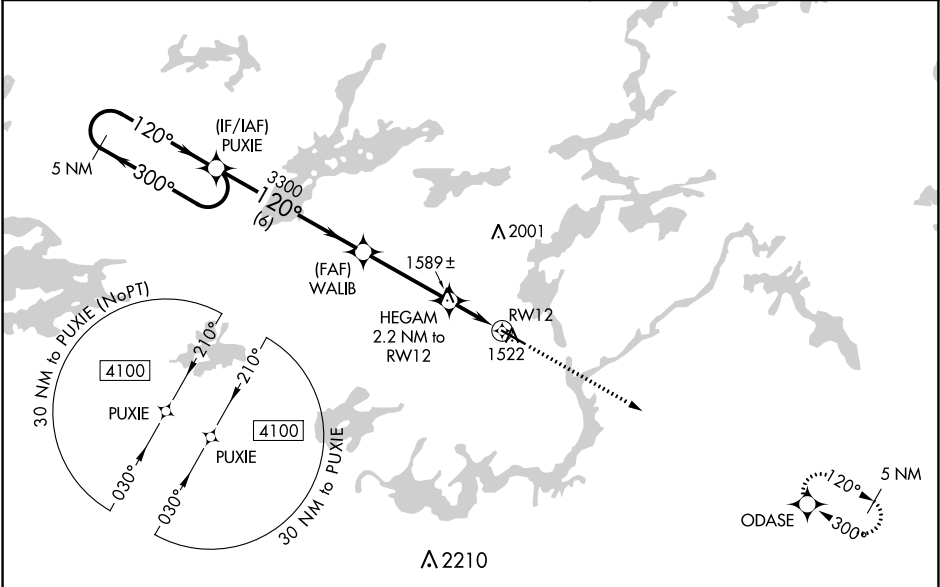

ELEV 1456		TDZE 1452	
5 NM Holding Pattern		4100 ODASE	
GP 3.00° TCH 40		*1.1 NM to RW12	
6 NM		*2160	
CATEGORY	A	B	C
LPV DA	1652-1 200 (200-1)		
LNAV/VNAV DA	1726-1 274 (300-1)		
LNAV MDA	1840-1 388 (400-1)	1840-1½ 388 (400-1½)	
CIRCLING	1920-1 464 (500-1)	1940-1 484 (500-1)	2360-3 904 (1000-3)

WAAS CH 93627 W30A	APP CRS 300°	Rwy Idg TDZE 1456 Apt Elev 1456
--	------------------------	---

RNAV (GPS) RWY 30


ELY MUNI (ELO)

⚠

Baro-VNAV NA when using Cook altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 34°C (93°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Cook altimeter setting and increase all DA/MDA 100 feet; increase LPV visibility ½ mile all Cats, LNAV/VNAV visibility ¾ mile all Cats, and LNAV Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 4100 direct PUXIE and hold.

AWOS-3PT 132.025	MINNEAPOLIS CENTER 127.9 281.45	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

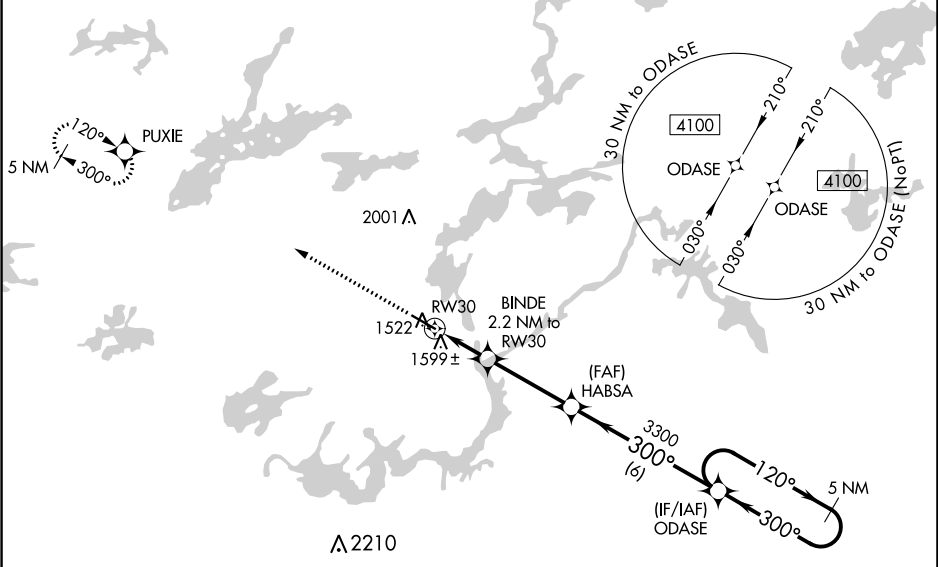

ELEV 1456	TDZE 1456
-----------	-----------

4100

PUXIE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).

*LNAV only

BINDE
2.2 NM to RW30

HABSA
3300

ODASE

5 NM Holding Pattern

120° → 4100
← 300°

GP 3.00°
TCH 52

12

5596 x 100

30

300° to RW30

CATEGORY	A	B	C	D
LPV DA	1706-1 250 (300-1)			
LNAV/VNAV DA	1780-1 324 (400-1)			
LNAV MDA	1860-1 404 (500-1)		1860-1½ 404 (500-1½)	
CIRCLING	1920-1 464 (500-1)	1940-1 484 (500-1)	1940-1½ 484 (500-1½)	2360-3 904 (1000-3)