ILS or LOC RWY 1
GREENVILLE DOWNTOWN (GMU)

LOC I-GMU	APP CRS	Rwy ldg 5393
109.7	**006°**	TDZE 1015 / Apt Elev 1048

ADF required. RADAR required for procedure entry at SPRKI.

T A Inop table does not apply to S-ILS 1 all Cats. For inop ALS, increase S-LOC 1 visibility Cats C/D to 1⅛ SM. When local altimeter setting not received, use Greer altimeter setting and increase DA to 1248, increase all MDAs 40 feet and Circling Cat C visibility ¼ SM. For inop ALS when using Greer altimeter setting, increase S-LOC 1 visibility Cat C/D to 1⅜ SM. When using Greer altimeter setting, inop table does not apply to S-ILS 1 all Cats.

MALSF A4

MISSED APPROACH: Climb to 1500 then climbing right turn to 2900 direct JUDKY LOM and hold, continue climb-in-hold to 2900.

ATIS ★	GREER APP CON★	GREENVILLE TOWER★	GND CON	UNICOM
127.075	**118.8 270.275**	**119.9** (CTAF) L **257.7**	**121.25**	**122.95**

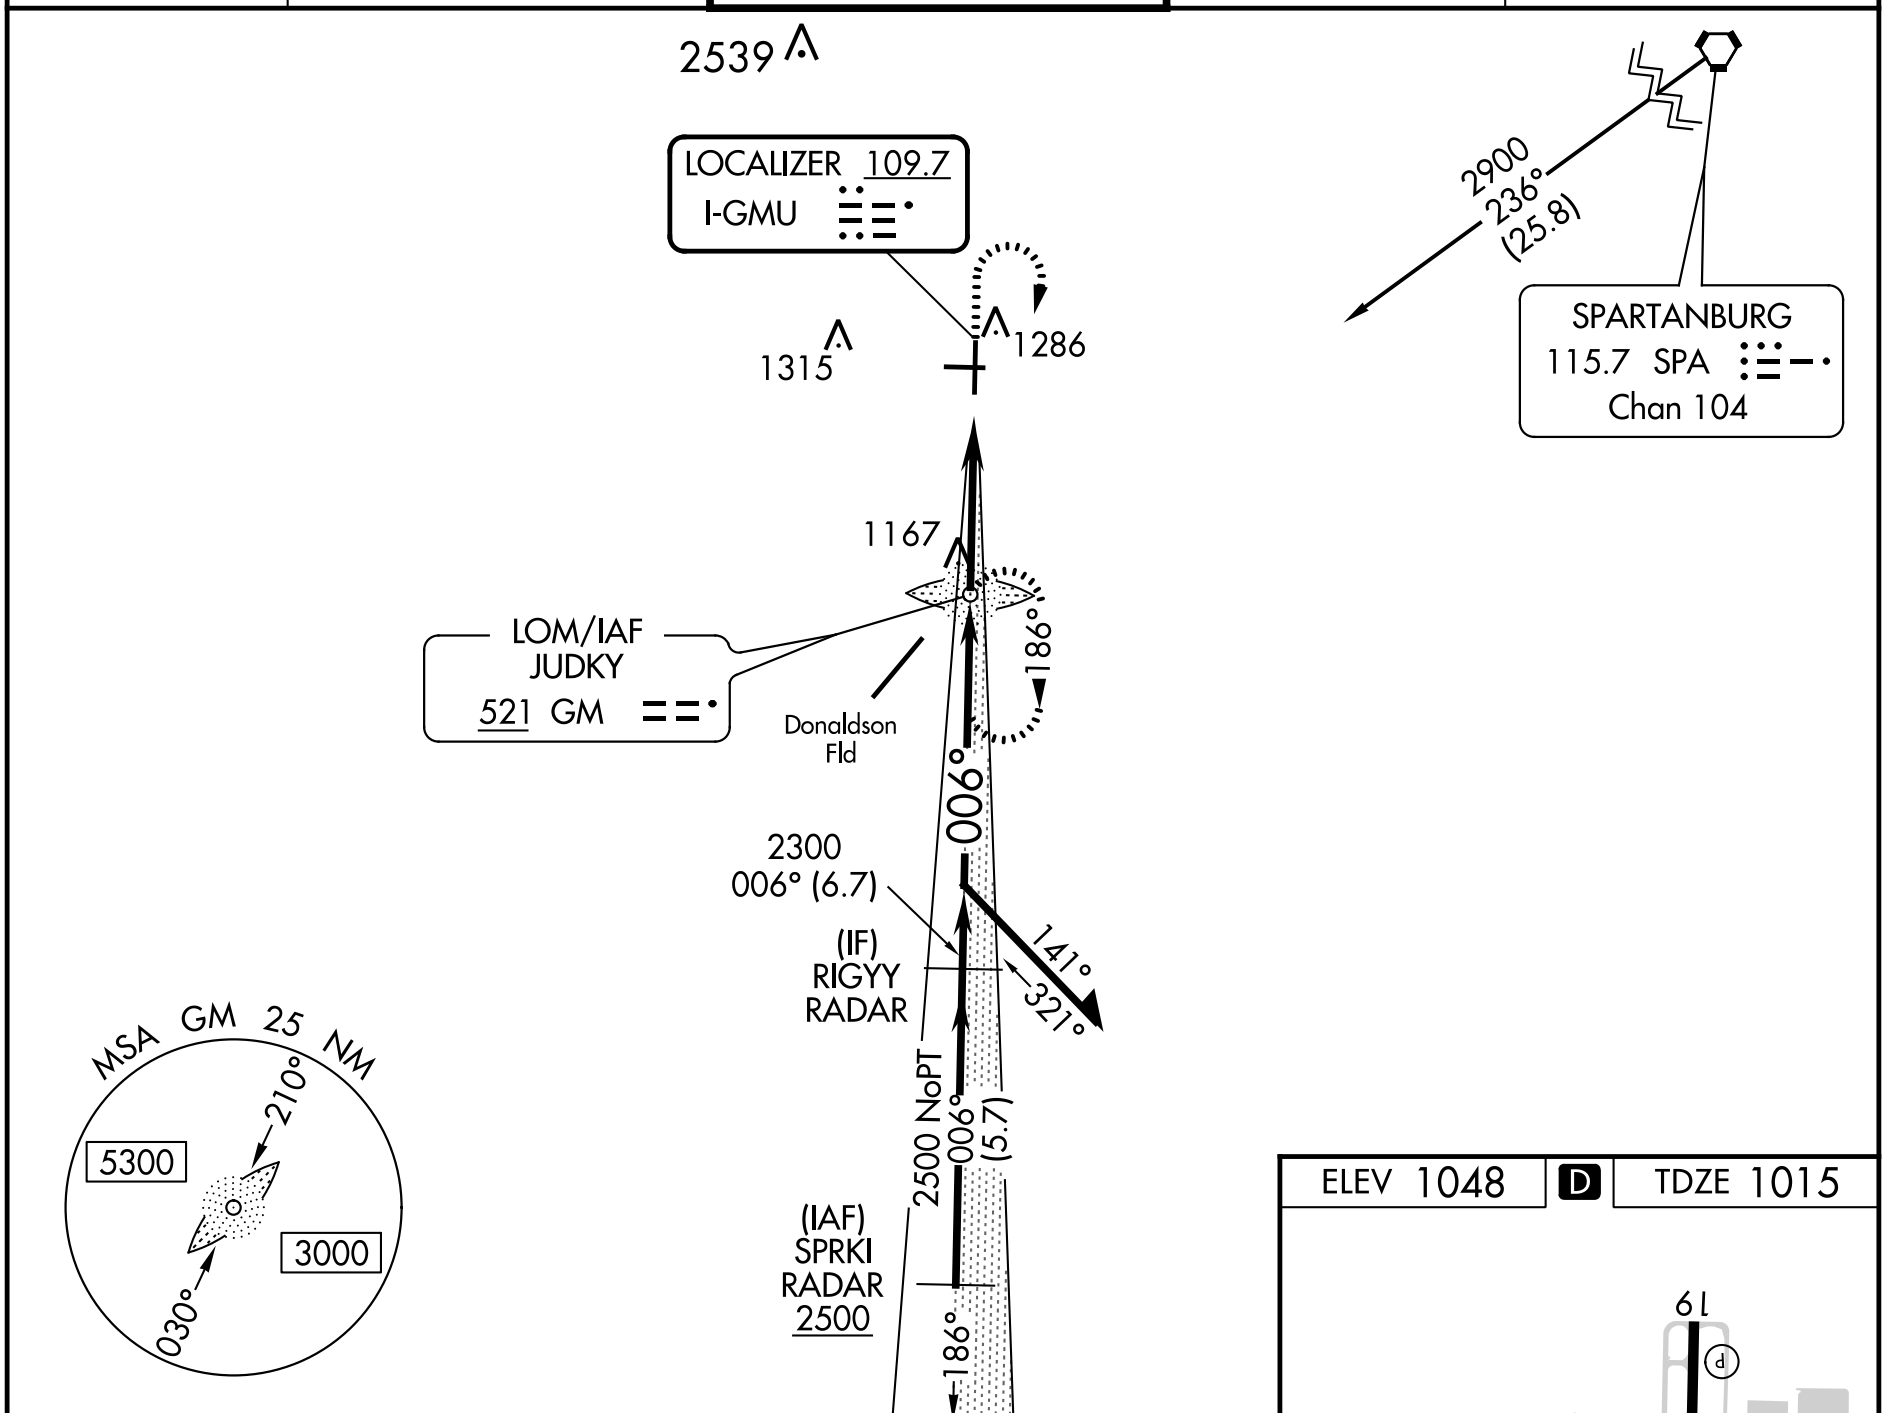

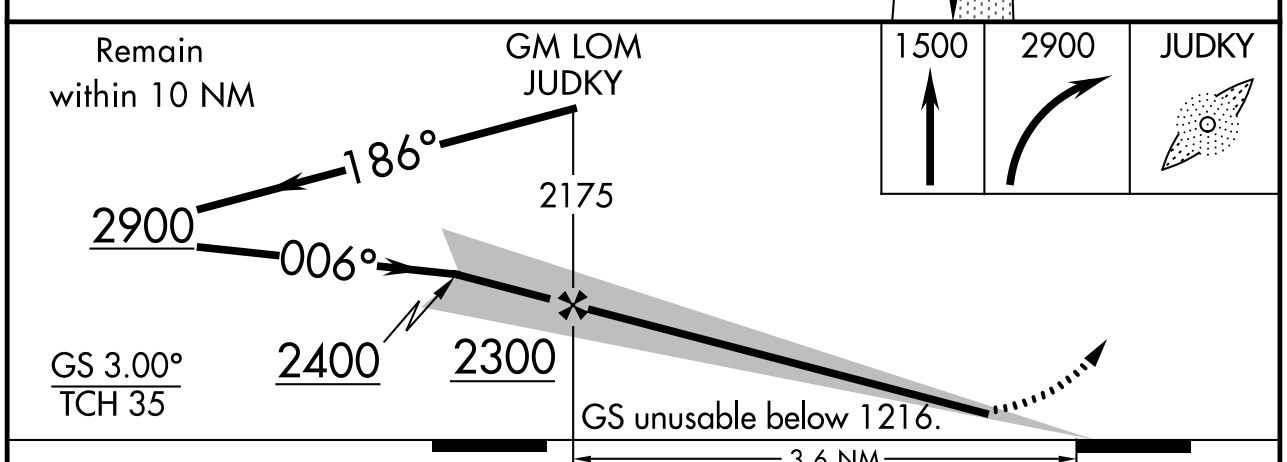

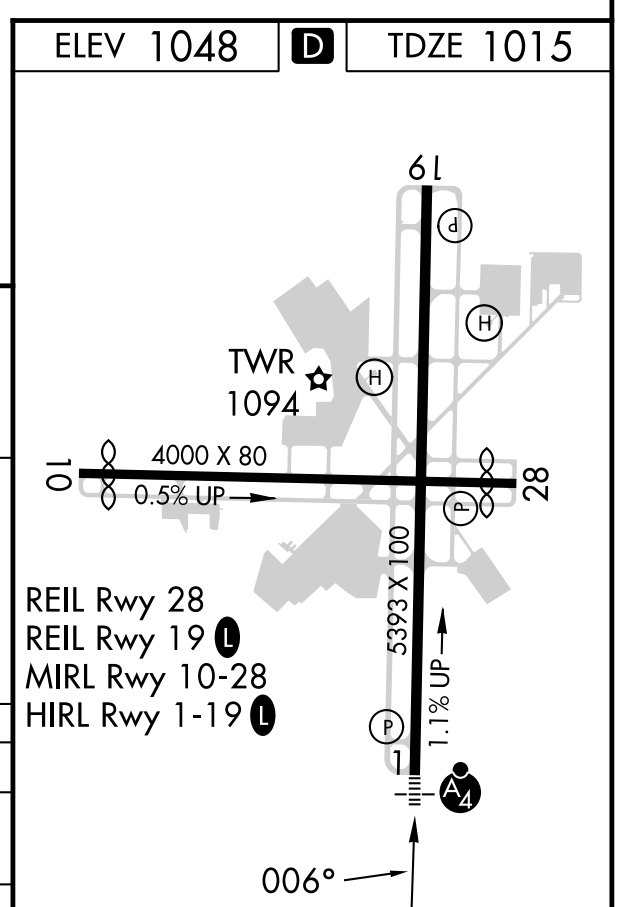

CATEGORY	A	B	C	D
S-ILS 1	1216-¾ 201 (200-¾)			
S-LOC 1	1420-¾ 405 (400-¾)		1420-1 405 (400-1)	
C CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

FAF to MAP 3.6 NM

Knots	60	90	120	150	180
Min:Sec	3:36	2:24	1:48	1:26	1:12

SE-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 1
GREENVILLE DOWNTOWN (GMU)

WAAS CH 53413 W01A	APP CRS 006°	Rwy ldg 5393 TDZE 1015 Apt Elev 1048

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Greer altimeter setting. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibility ¼ mile. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cat C.

MALSF

MISSED APPROACH: Climb to 3400 direct GEBLL and via track 060° to PELAM and hold.

ATIS ★	GREER APP CON ★	GREENVILLE TOWER ★	GND CON	UNICOM
127.075	118.8 270.275	119.9 (CTAF) L 257.7	121.25	122.95

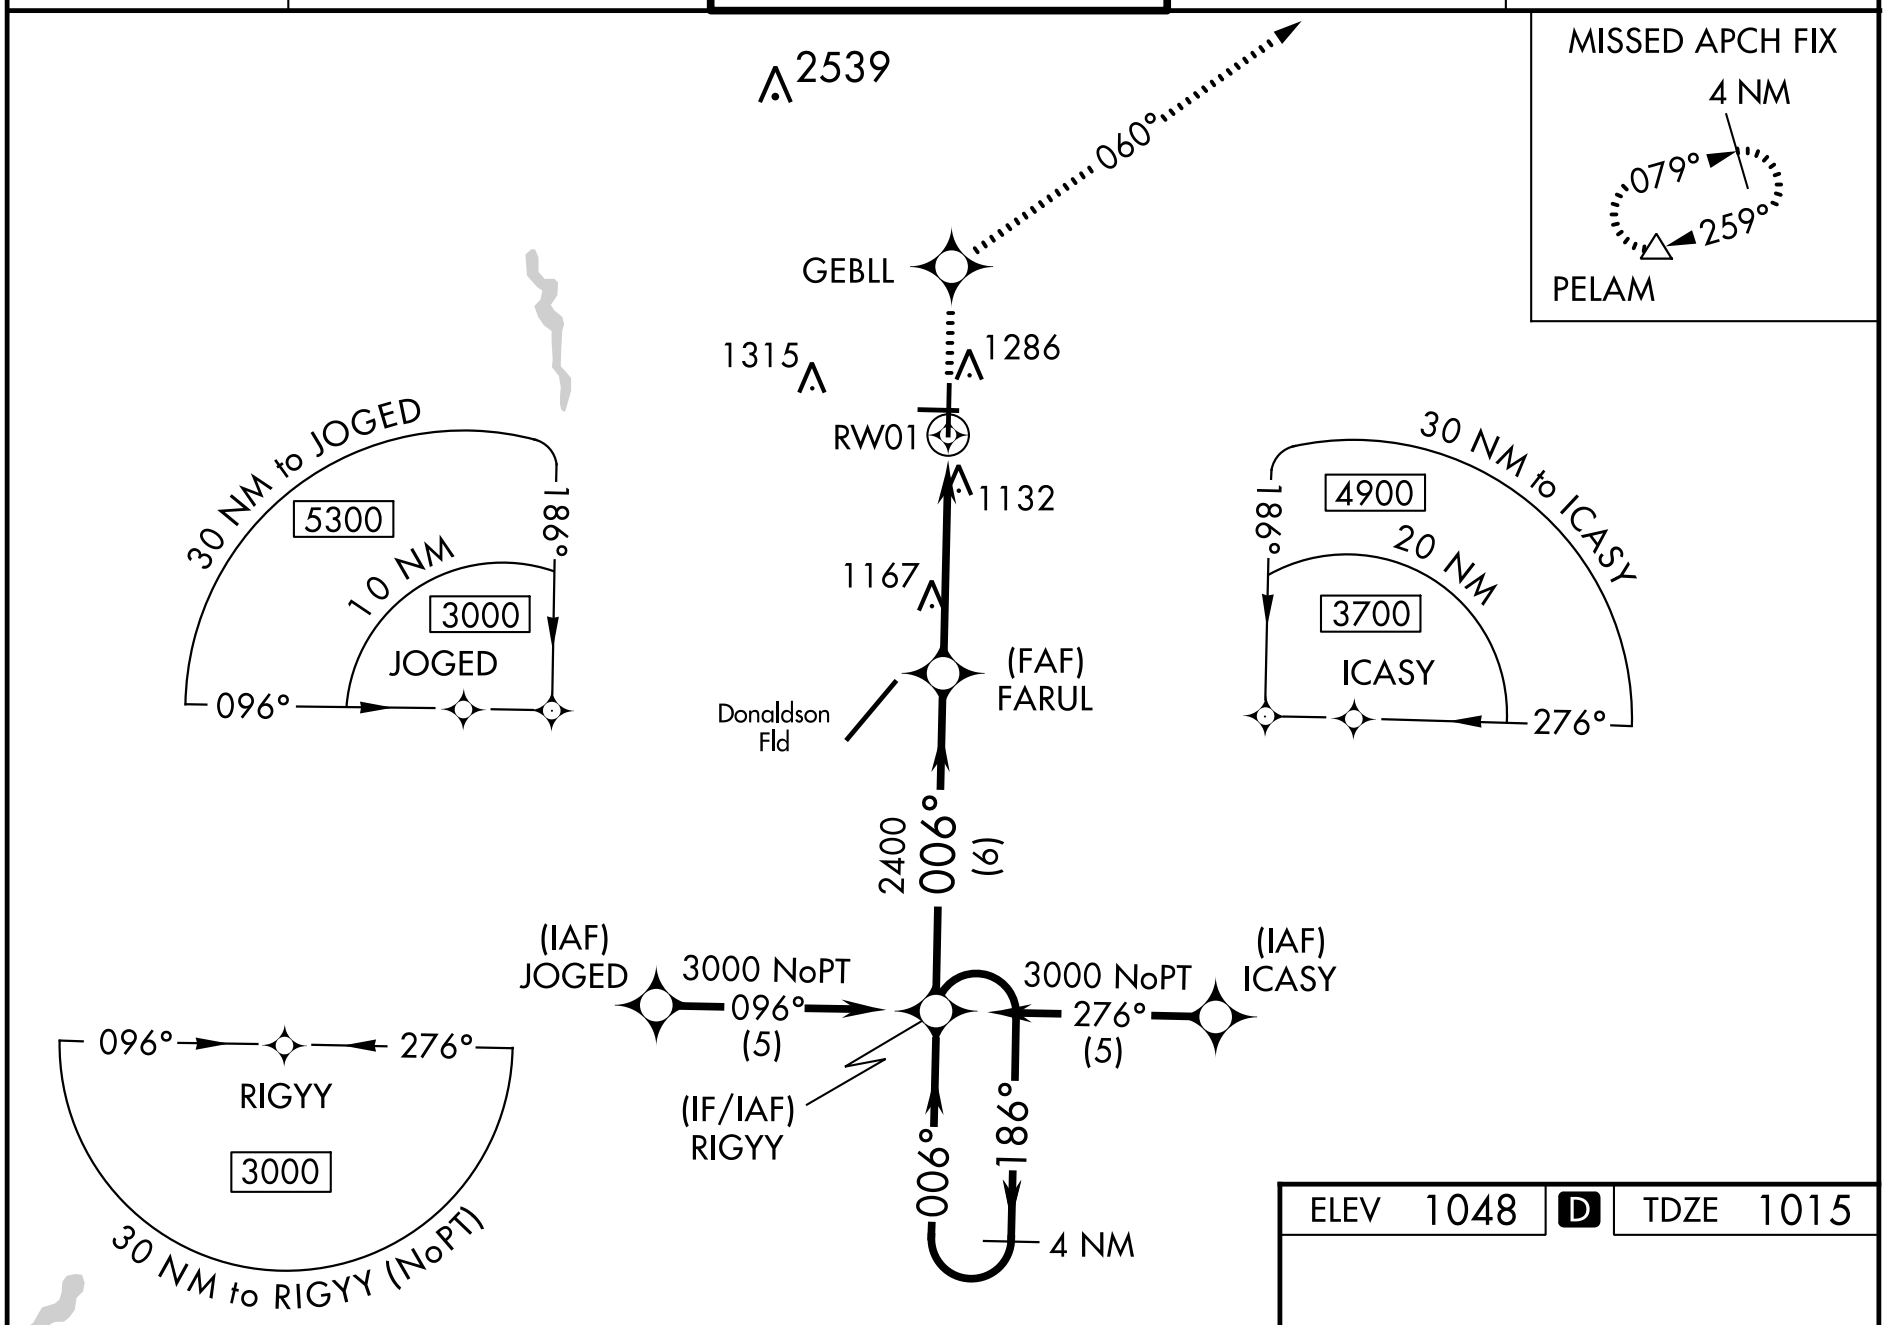

ELEV 1048 D TDZE 1015

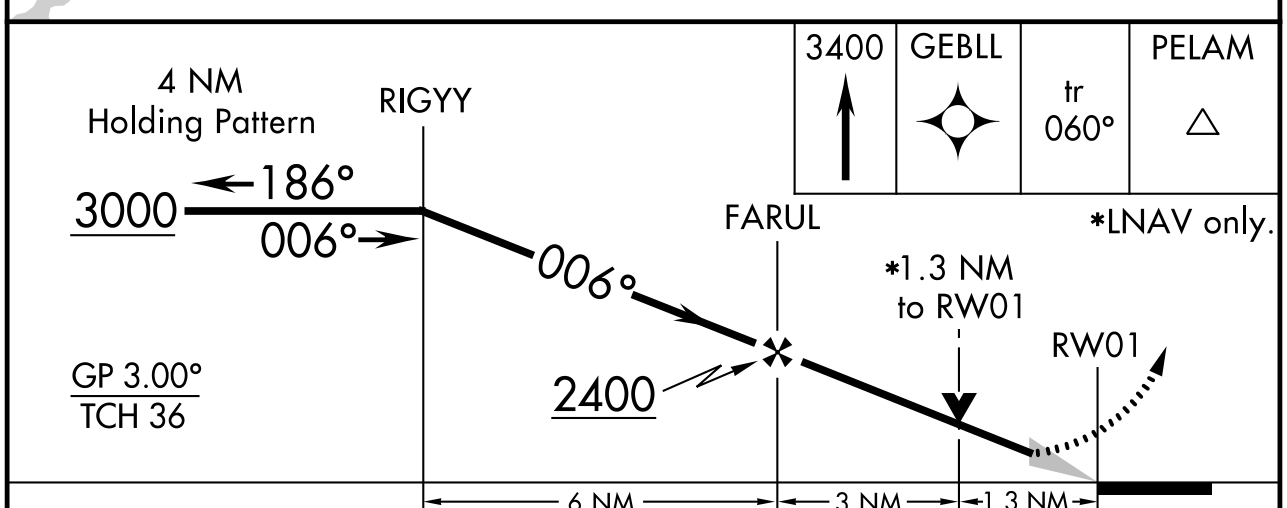

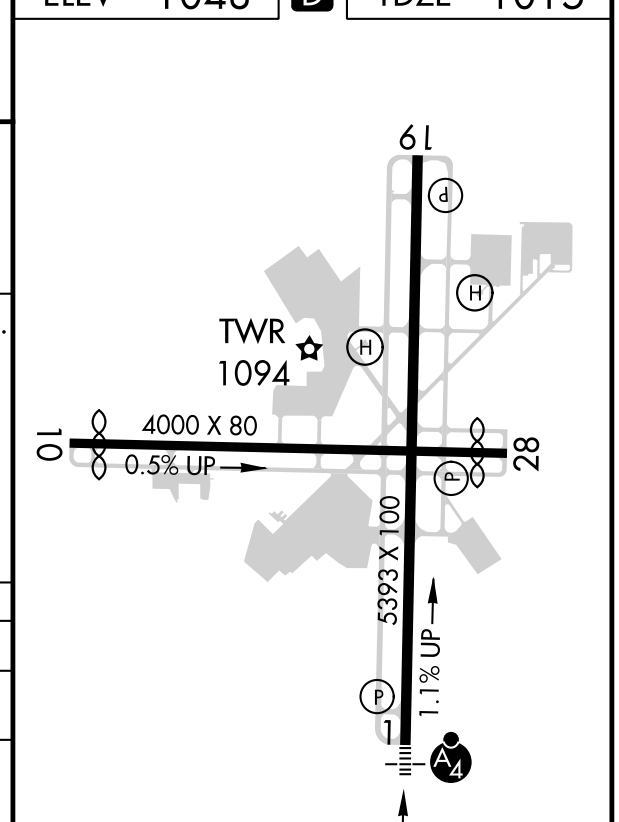

CATEGORY	A	B	C	D
LPV DA	1215-¾ 200 (200-¾)			
LNAV/VNAV DA	1415-1½ 400 (400-1½)			
LNAV MDA	1440-¾ 425 (400-¾)		1440-1¼ 425 (400-1¼)	
C CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

REIL Rwy 28
REIL Rwy 19 L
MIRL Rwy 10-28
HIRL Rwy 1-19 L

SE-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 10
GREENVILLE DOWNTOWN (GMU)

WAAS CH 49137 W10A	APP CRS 096°	Rwy ldg TDZE Apt Elev	3463 1013 1048

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ⅛ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3700 direct JADOT and hold.

ATIS ★	GREER APP CON ★	GREENVILLE TOWER ★	GND CON	UNICOM
127.075	118.8 270.275	119.9 (CTAF) L 257.7	121.25	122.95

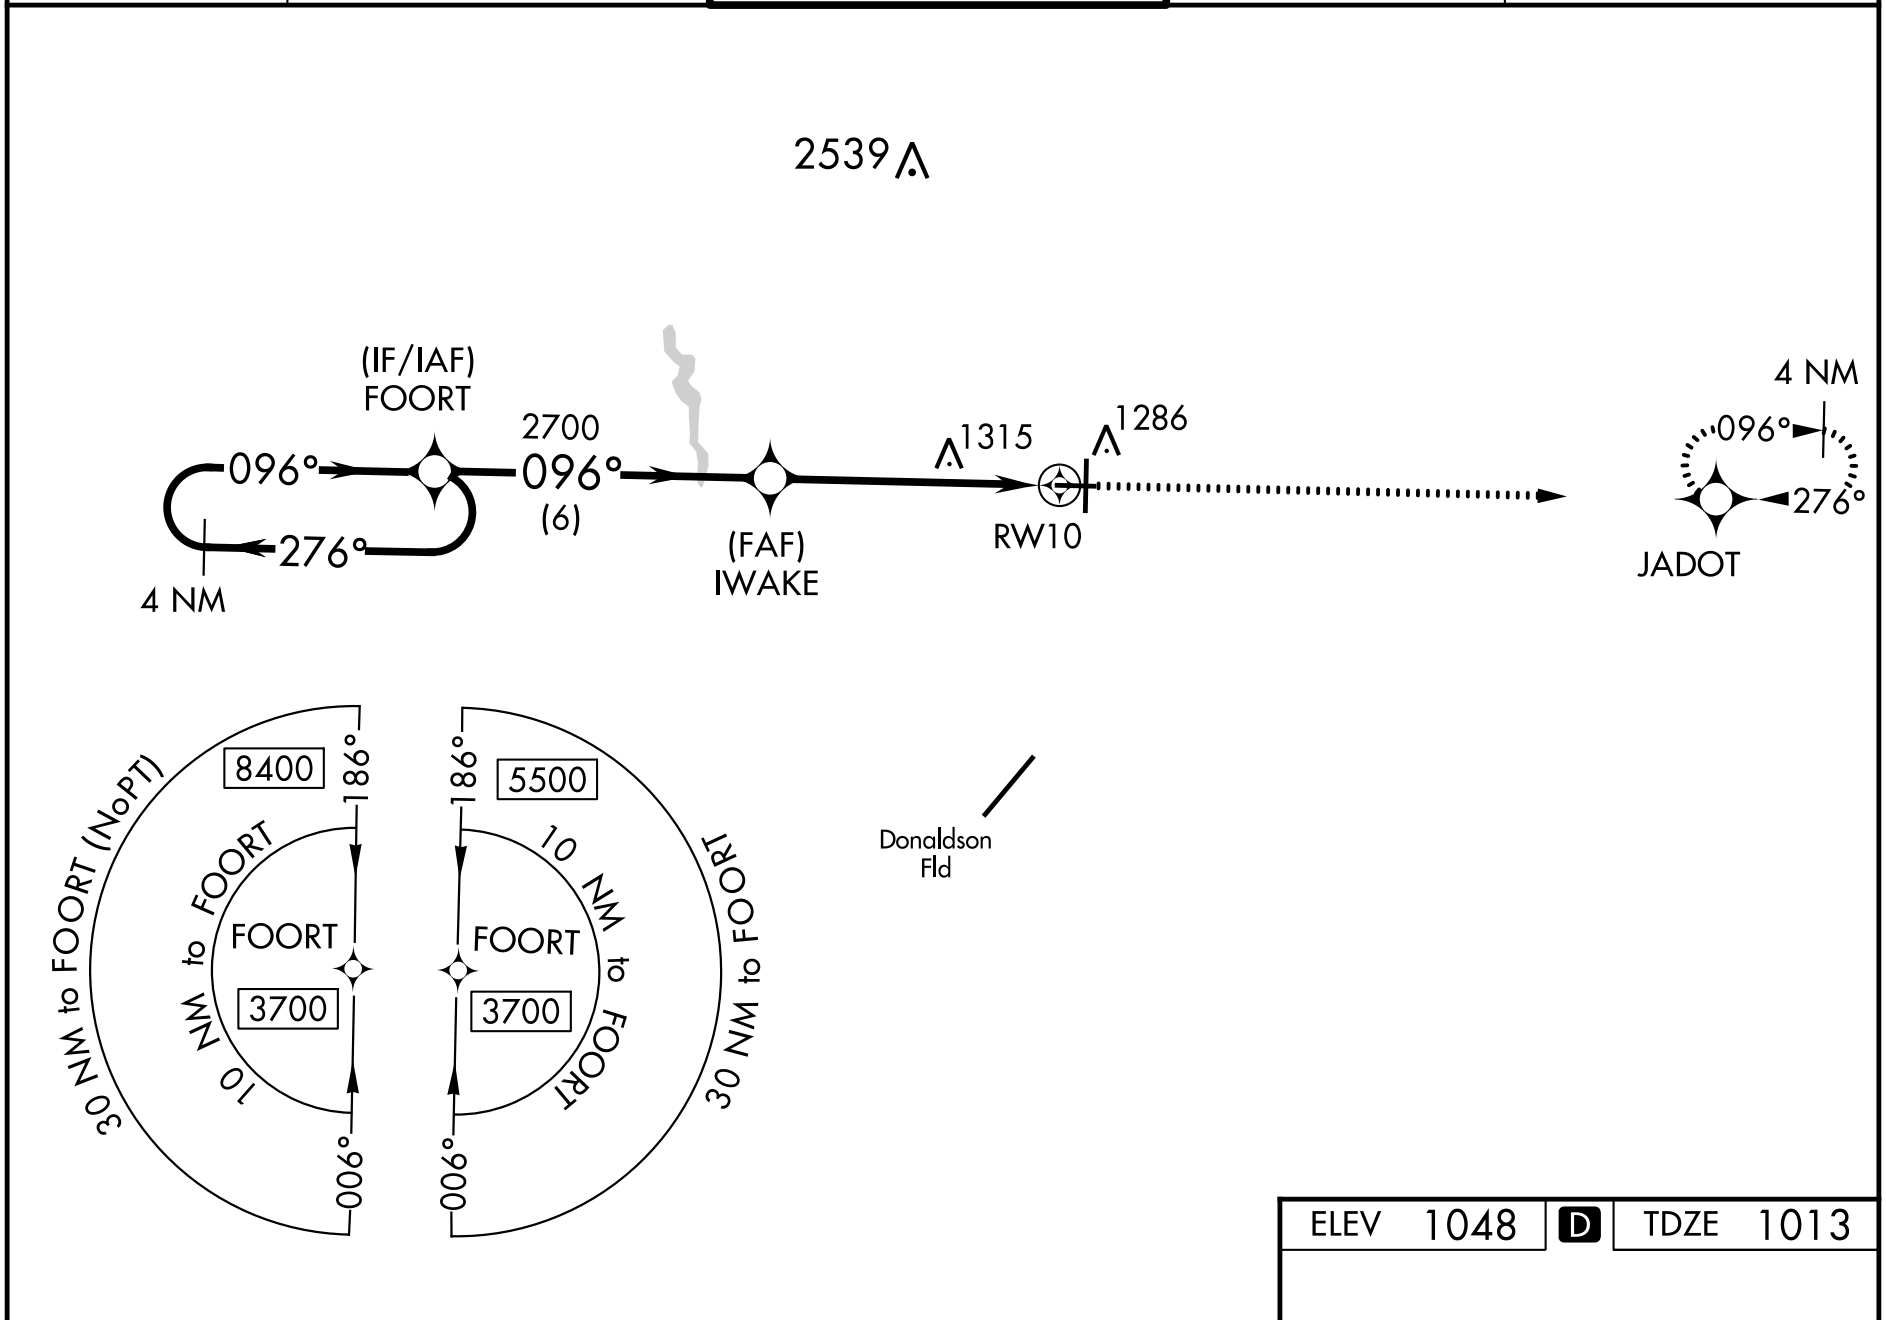

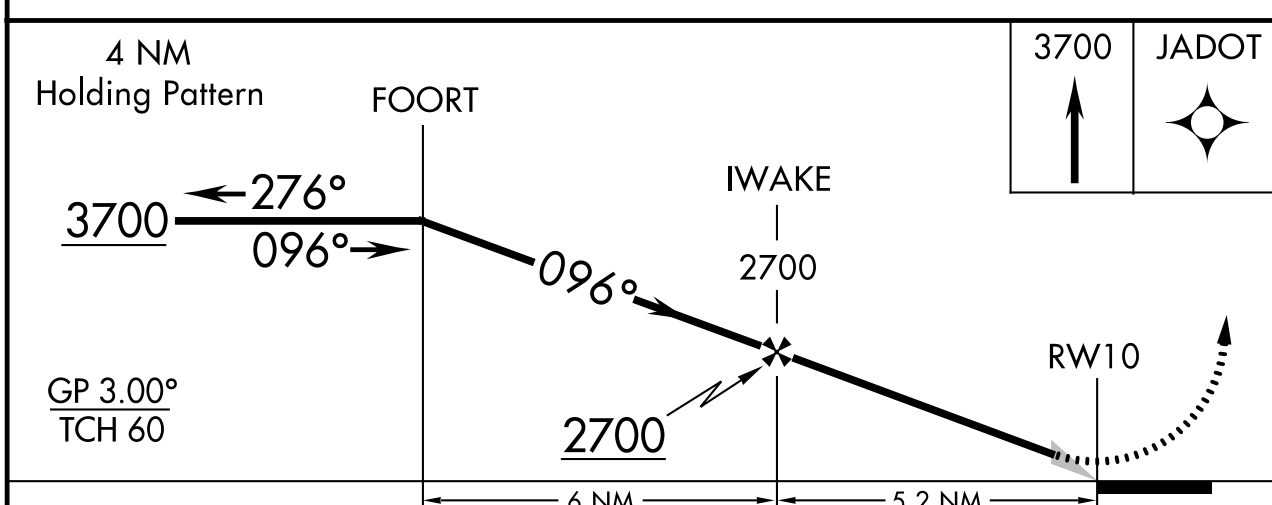

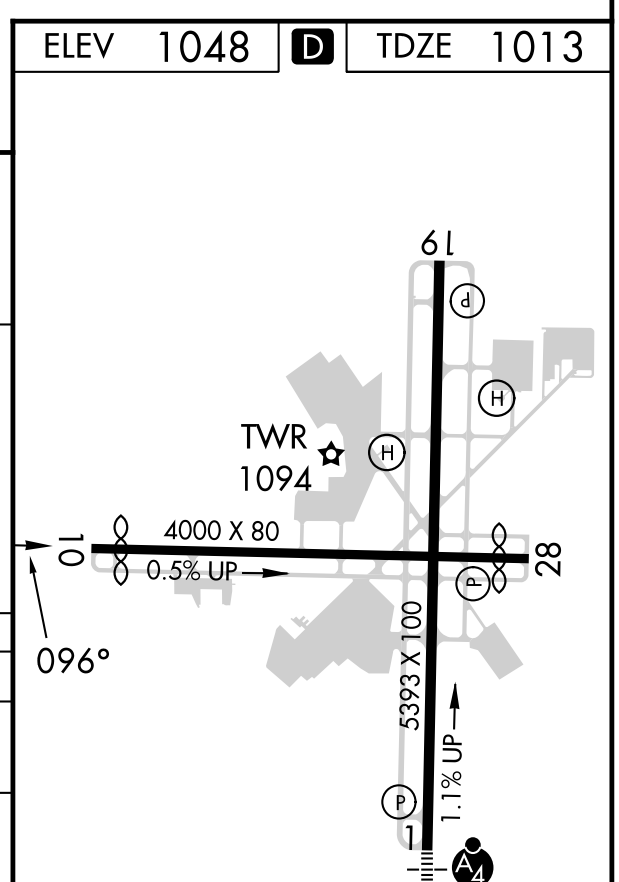

CATEGORY	A	B	C	D
LPV DA	1269-1 256 (300-1)			
LNAV/VNAV DA	1351-1⅛ 338 (400-1⅛)			
LNAV MDA	1580-1 567 (600-1)		1580-1⅝ 567 (600-1⅝)	
C CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

REIL Rwy 28
REIL Rwy 19 L
MIRL Rwy 10-28
HIRL Rwy 1-19 L

SE-2, 22 FEB 2024 to 21 MAR 2024
SE-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 19
GREENVILLE DOWNTOWN (GMU)

WAAS	APP CRS	Rwy ldg	5393
CH **93837**	**186°**	TDZE	**1048**
W19A		Apt Elev	**1048**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats visibility ⅛ mile, increase LNAV Cats C/D and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct RIGYY and hold.

ATIS ★	GREER APP CON ★	GREENVILLE TOWER ★	GND CON	UNICOM
127.075	**118.8 270.275**	**119.9** (CTAF) Ⓛ **257.7**	**121.25**	**122.95**

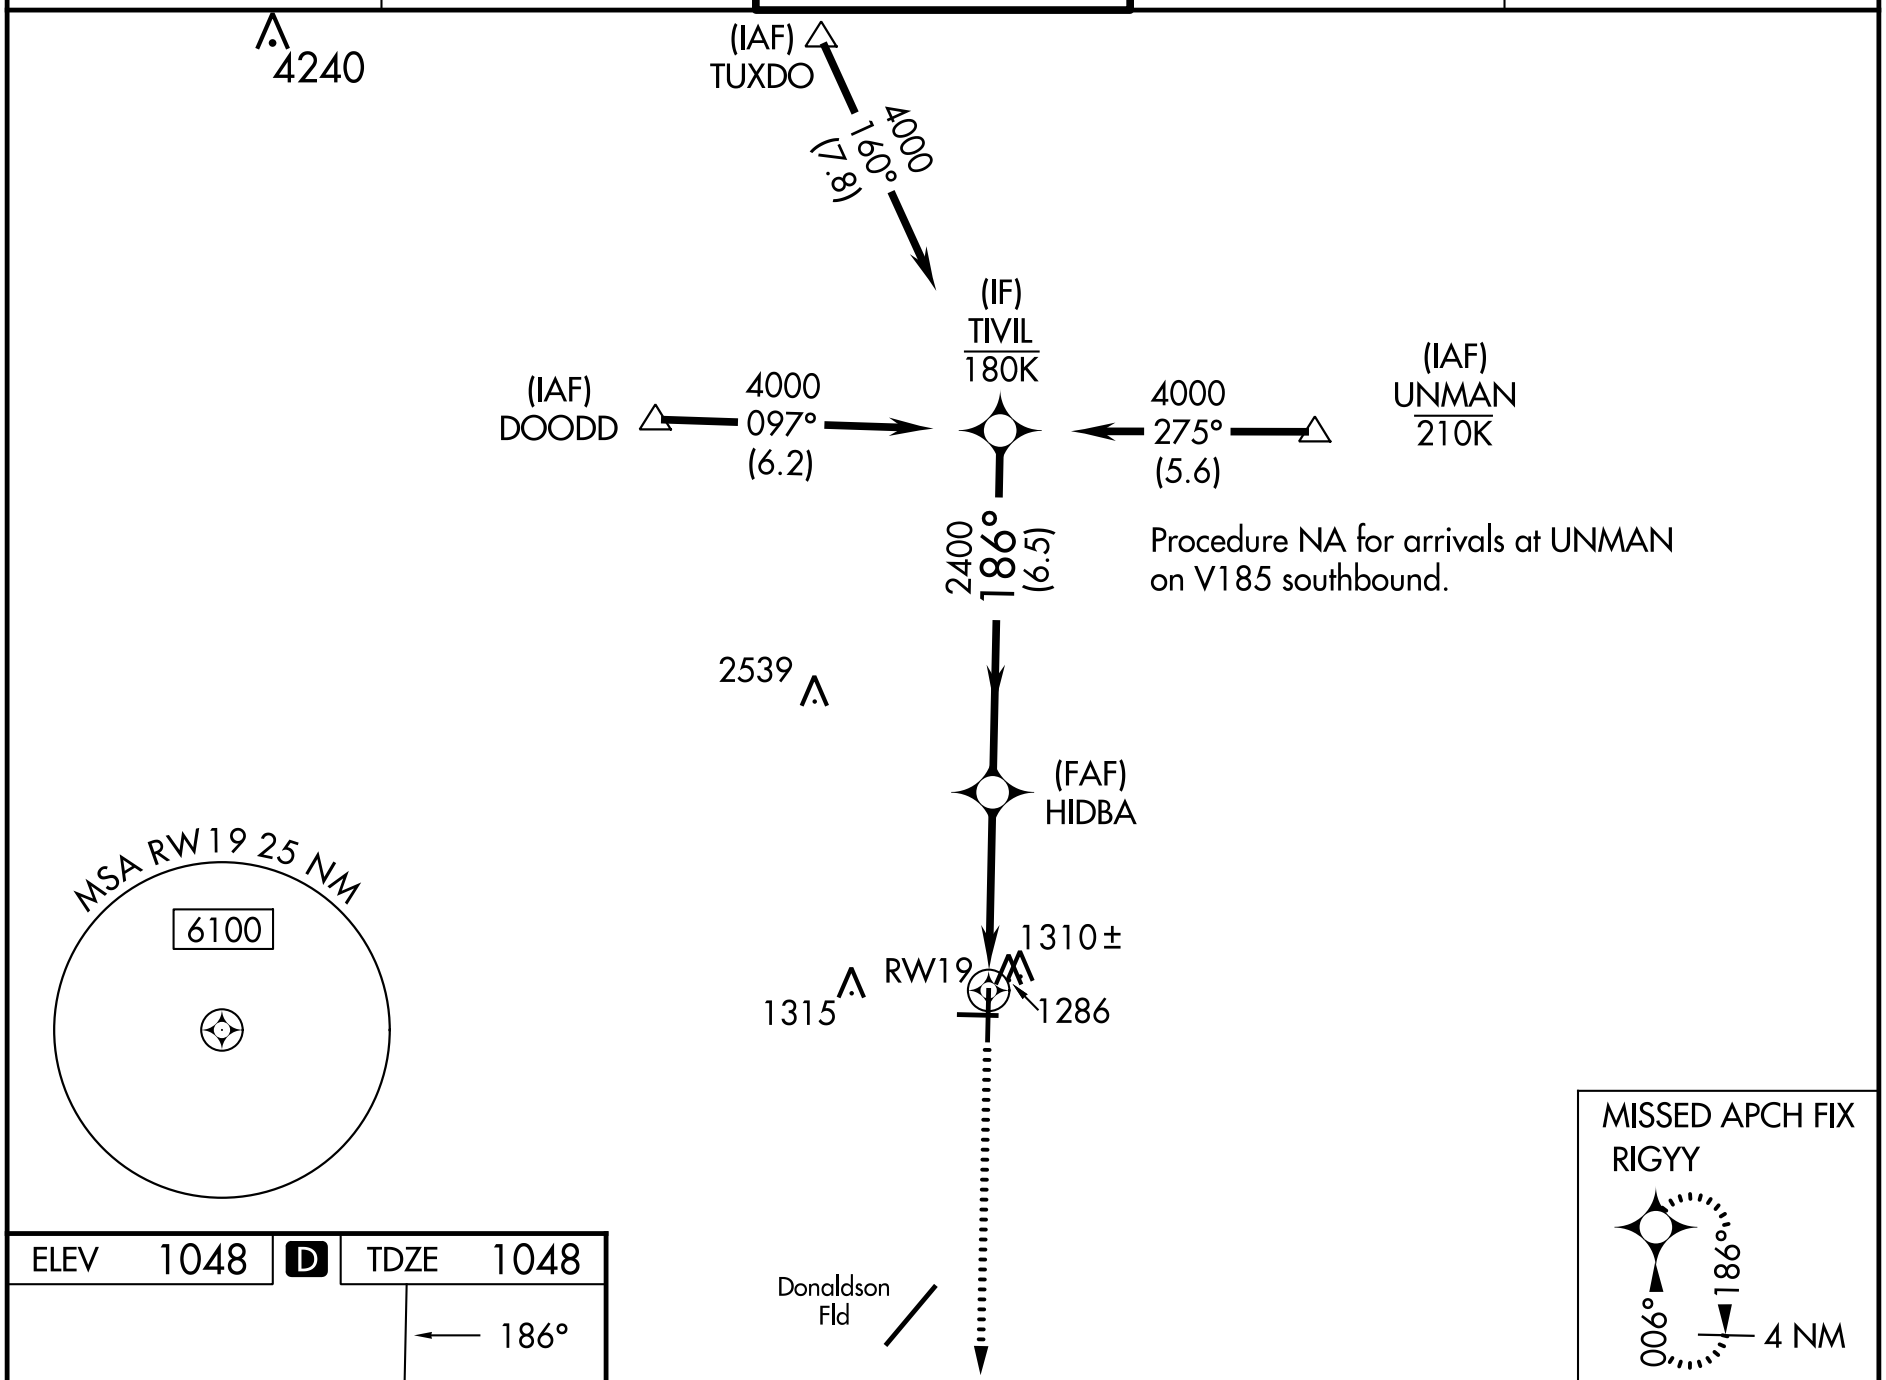

ELEV	1048	D	TDZE	1048

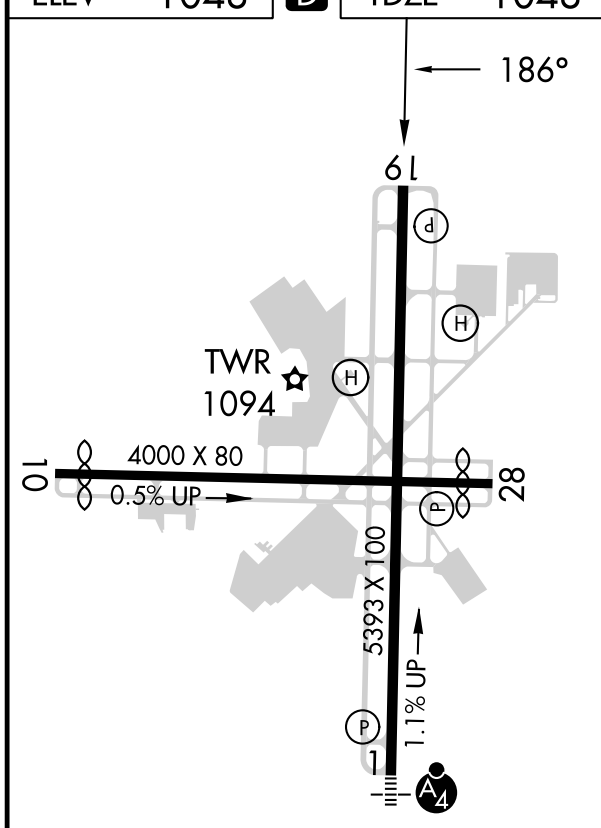

REIL Rwy 28
REIL Rwy 19 Ⓛ
MIRL Rwy 10-28
HIRL Rwy 1-19 Ⓛ

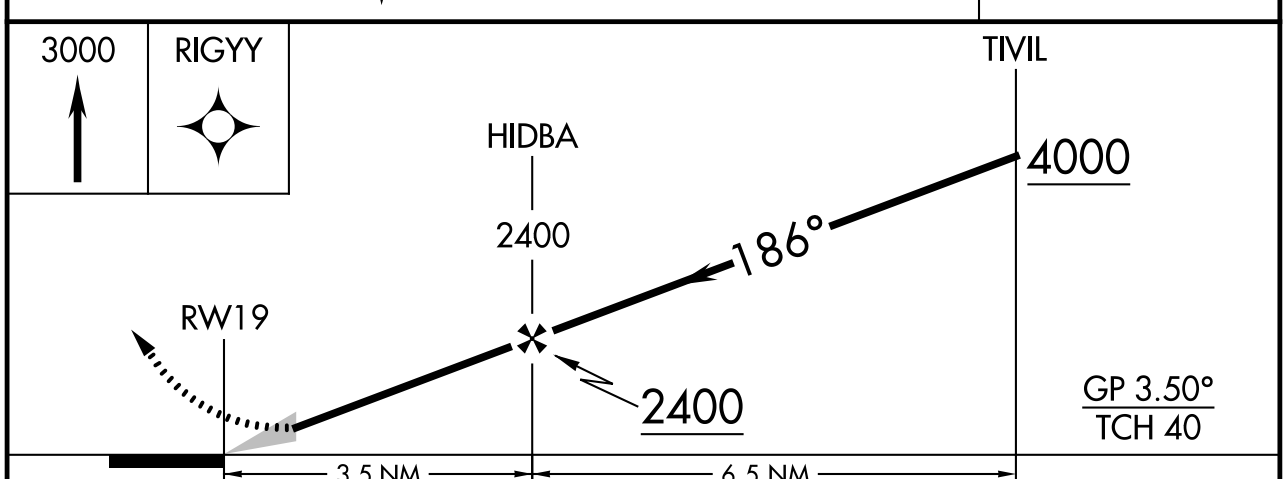

CATEGORY	A	B	C	D
LPV DA	1373-1 325 (400-1)			NA
LNAV/VNAV DA	1480-1¼ 432 (500-1¼)			NA
LNAV MDA	1560-1 512 (600-1)		1560-1⅜ 512 (600-1⅜)	
C CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

SE-2, 22 FEB 2024 to 21 MAR 2024

SE-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 28
GREENVILLE DOWNTOWN (GMU)

WAAS CH 87037 W28A	APP CRS 276°	Rwy ldg 3463 TDZE 1013 Apt Elev 1048

Baro-VNAV NA when using Greer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ mile. Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 19 NA.

MISSED APPROACH: Climb to 3700 direct FOORT and hold.

ATIS ★	GREER APP CON ★	GREENVILLE TOWER ★	GND CON	UNICOM
127.075	118.8 270.275	119.9 (CTAF) L 257.7	121.25	122.95

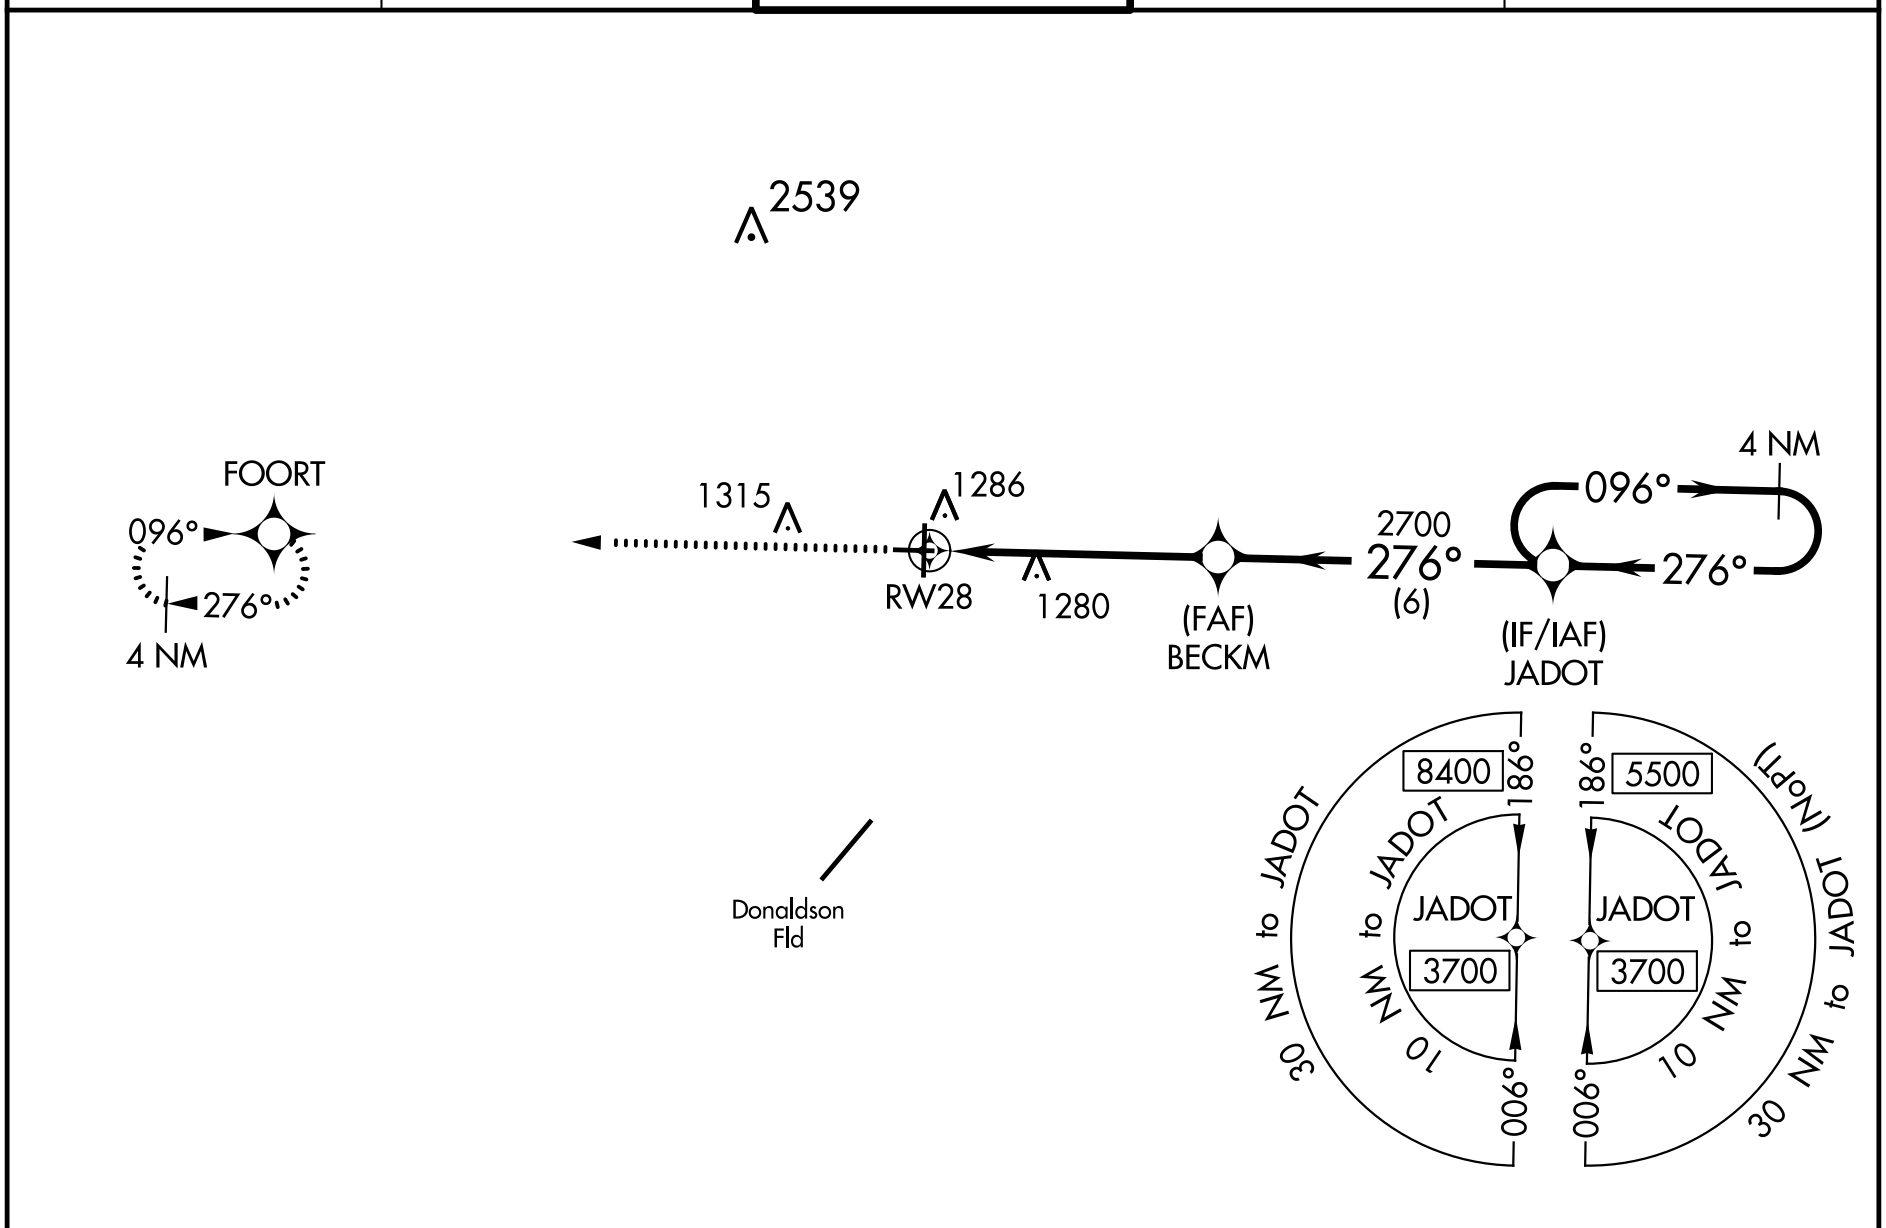

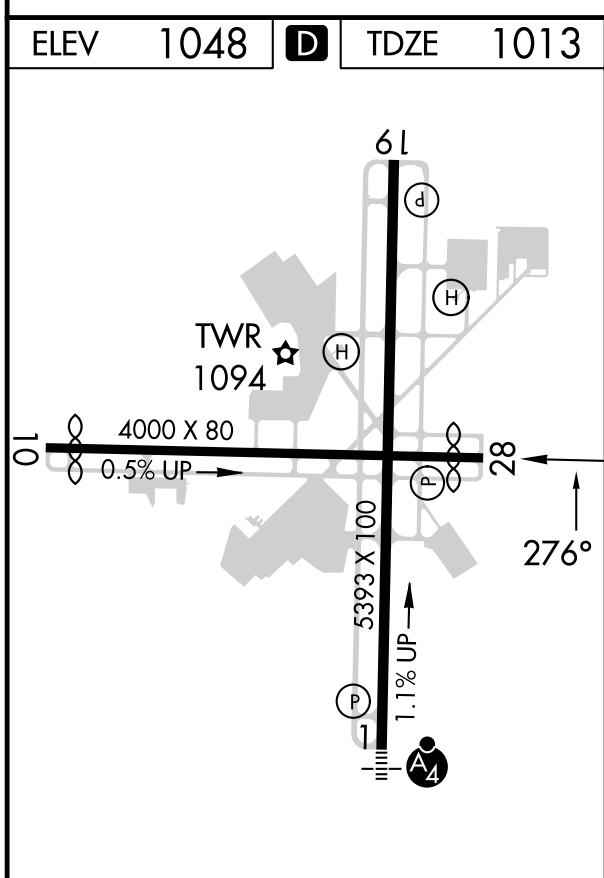

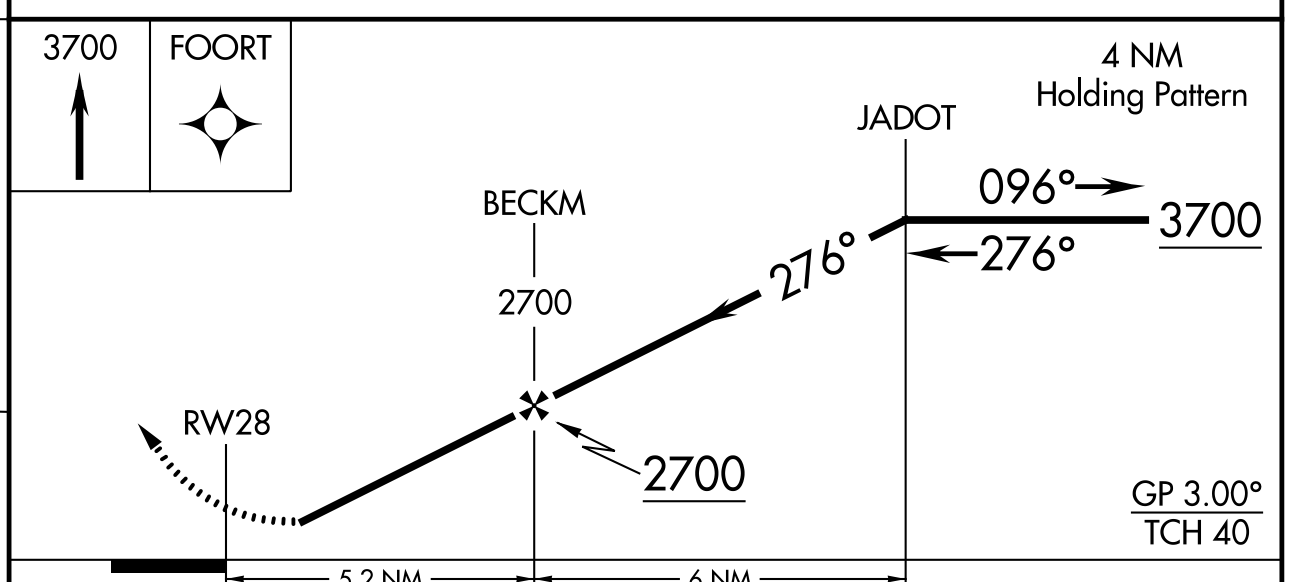

CATEGORY	A	B	C	D
LPV DA	1263-1 250 (300-1)			
LNAV/VNAV DA	1463-1½ 450 (500-1½)			
LNAV MDA	1540-1 527 (500-1)		1540-1½ 527 (500-1½)	
C CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

REIL Rwy 28
REIL Rwy 19 L
MIRL Rwy 10-28
HIRL Rwy 1-19 L

SE-2, 22 FEB 2024 to 21 MAR 2024
SE-2, 22 FEB 2024 to 21 MAR 2024