NDB GUY 275	APP CRS 177°	Rwy Idg 5904 TDZE 3125 Apt Elev 3125

NDB RWY 18
GUYMON MUNI (GUY)

T A Circling NA to Rwys 6 and 24. Circling NA east of Rwy 18-36. When local altimeter setting not received, use Liberal altimeter setting and increase all MDAs 120 feet and visibility Cats A and C ½ SM. For inop ALS, increase S-18 Cat C visibility to 2½ SM. For inop ALS when using Liberal altimeter setting, inop table does not apply to S-18 Cat C.

ODALS

MISSED APPROACH: Climb to 5000 then right turn direct GUY NDB and hold.

ASOS	KANSAS CITY CENTER	UNICOM
119.925	134.0 257.865	122.7 (CTAF) L

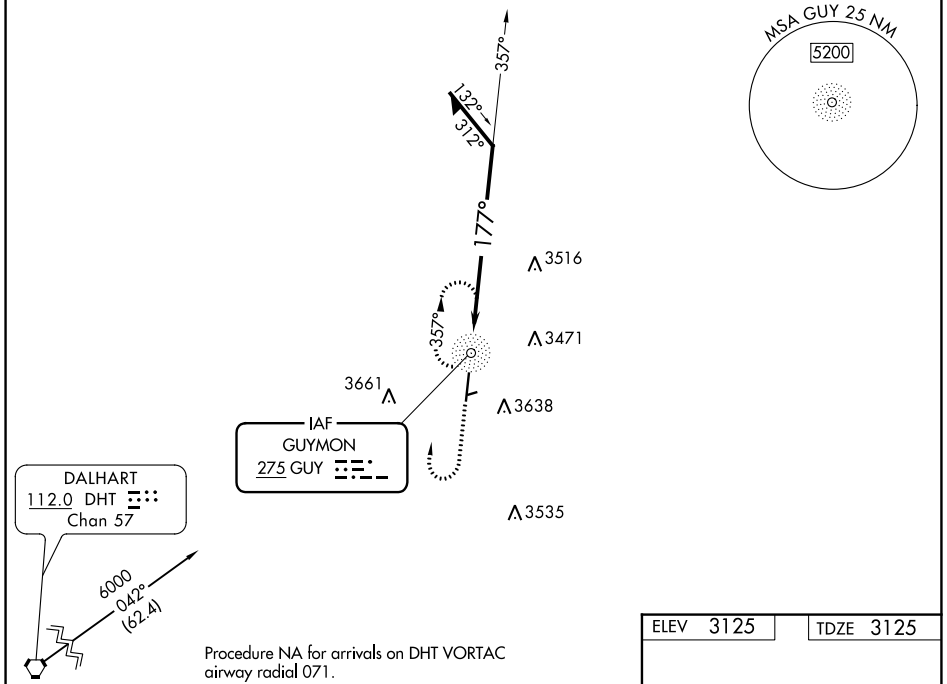

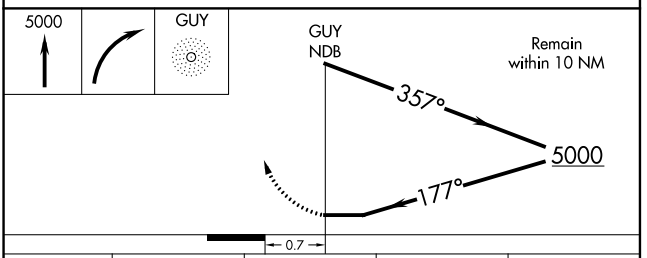

CATEGORY	A	B	C	D
S-18	3900-¾ 775 (800-¾)	3900-1 775 (800-1)	3900-2 775 (800-2)	NA
C CIRCLING	3900-1 775 (800-1)	3900-1¼ 775 (800-1¼)	3980-2½ 855 (900-2½)	NA

ELEV 3125 TDZE 3125

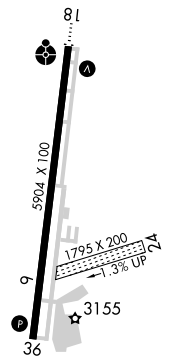

MIRL Rwy 18-36 L

SC-1, 22 FEB 2024 to 21 MAR 2024
SC-1, 22 FEB 2024 to 21 MAR 2024

WAAS	APP CRS	Rwy Idg	5904
CH 82625	177°	TDZE	3125
W18A		Apt Elev	3125

RNAV (GPS) RWY 18

GUYMON MUNI (GUY)

Baro-VNAV NA when using Liberal altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Liberal altimeter setting: Increase LPV DA to 3488 feet; increase LNAV/VNAV DA to 3564 feet and all visibilities ⅛ SM; increase all MDAs 120 feet and visibility Cat C ½ SM. Circling NA to Rwys 6 and 24.

ODALS

MISSED APPROACH: Climb to 6000 direct BEAKY and hold.

ASOS	KANSAS CITY CENTER	UNICOM
119.925	134.0 257.625	122.7 (CTAF) L

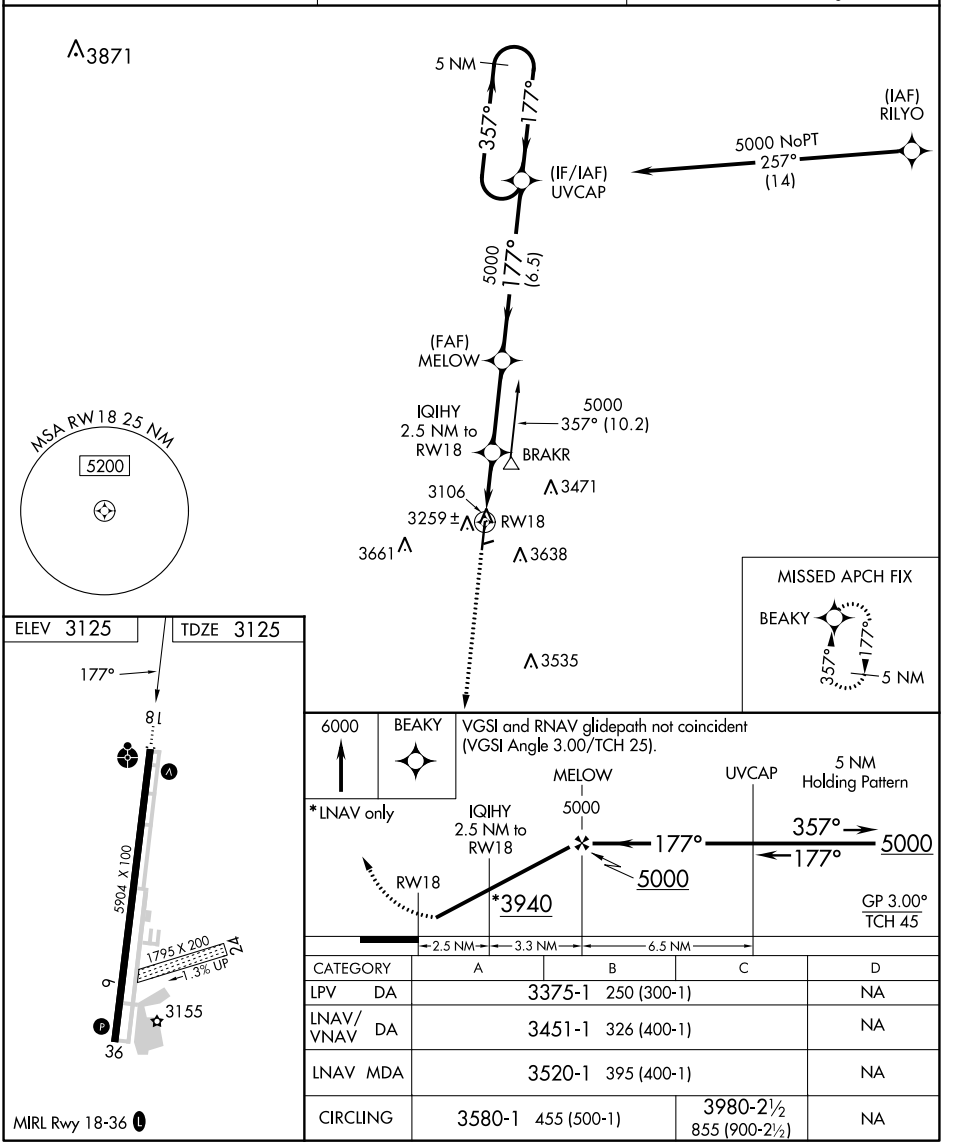

CATEGORY	A	B	C	D
LPV DA	3375-1	250 (300-1)		NA
LNAV/VNAV DA	3451-1	326 (400-1)		NA
LNAV MDA	3520-1	395 (400-1)		NA
CIRCLING	3580-1	455 (500-1)	3980-2½ 855 (900-2½)	NA

MIRL Rwy 18-36 L

SC-1, 22 FEB 2024 to 21 MAR 2024
SC-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH **50525** **W36A** | APP CRS **357°** | Rwy Idg **5904** TDZE **3125** Apt Elev **3125**

RNAV (GPS) RWY 36

GUYMON MUNI (GUY)

RNP APCH - GPS.

T A Circling NA east of Rwy 18-36. Baro-VNAV and VDP NA when using Liberal altimeter setting. Rwy 36 helicopter visibility reduction below ¾ SM NA . For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Liberal altimeter setting: increase LPV DA to 3487 feet; LNAV/VNAV DA to 3696 feet and all visibilities ¼ SM; increase all MDAs 120 feet and visibility LNAV Cat C ¼ SM, and Circling Cat C ½ SM. Circling NA to Rwys 6 and 24.

MISSED APPROACH: Climb to 6000 direct UVCAP and hold.

ASOS	KANSAS CITY CENTER	UNICOM
119.925	**134.0 257.625**	**122.7** (CTAF) L

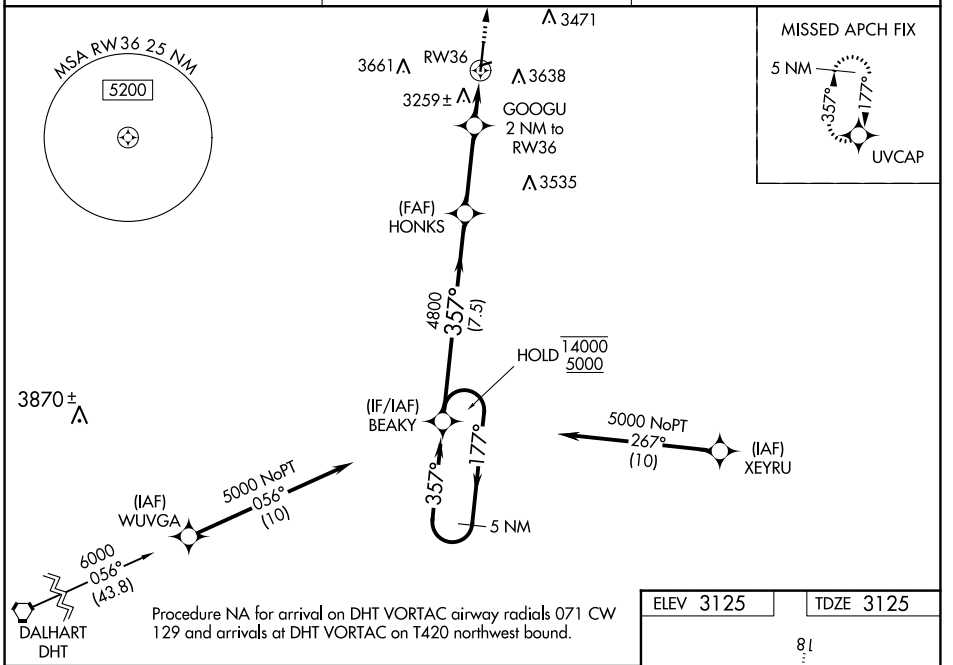

Procedure NA for arrival on DHT VORTAC airway radials 071 CW 129 and arrivals at DHT VORTAC on T420 northwest bound.

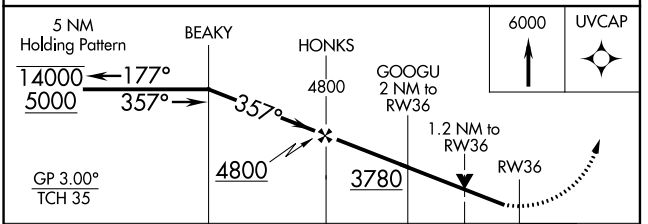

CATEGORY	A	B	C	D
LPV DA	3375-¾ 250 (300-¾)			NA
LNAV/VNAV DA	3584-1⅜ 459 (500-1⅜)			NA
LNAV MDA	3520-1 395 (400-1)		3520-1⅛ 395 (400-1⅛)	NA
C CIRCLING	3580-1 455 (500-1)	3600-1 475 (500-1)	3980-2½ 855 (900-2½)	NA

ELEV 3125 TDZE 3125

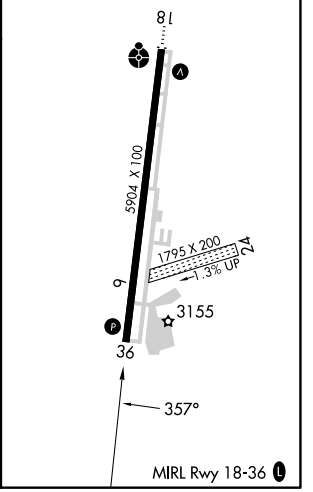

SC-1, 22 FEB 2024 to 21 MAR 2024
SC-1, 22 FEB 2024 to 21 MAR 2024