# LOC RWY 1
SKYLARK FLD (ILE)


| LOC I-ILE | APP CRS | Rwy Idg | 4641 |
|---|---|---|---|
| 108.3 | 012° | TDZE | 843 |
| | | Apt Elev | 848 |


ADF required.

T
A NA — Circling Rwy 19 NA at night.


MISSED APPROACH: Climb to 1500 then climbing right turn to 3100 direct IRESH LOM and hold, continue climb-in-hold to 3100.

| AWOS-3PT | GRAY APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 128.575 | 120.075 323.15 | 121.7 | 122.7 (CTAF) L |

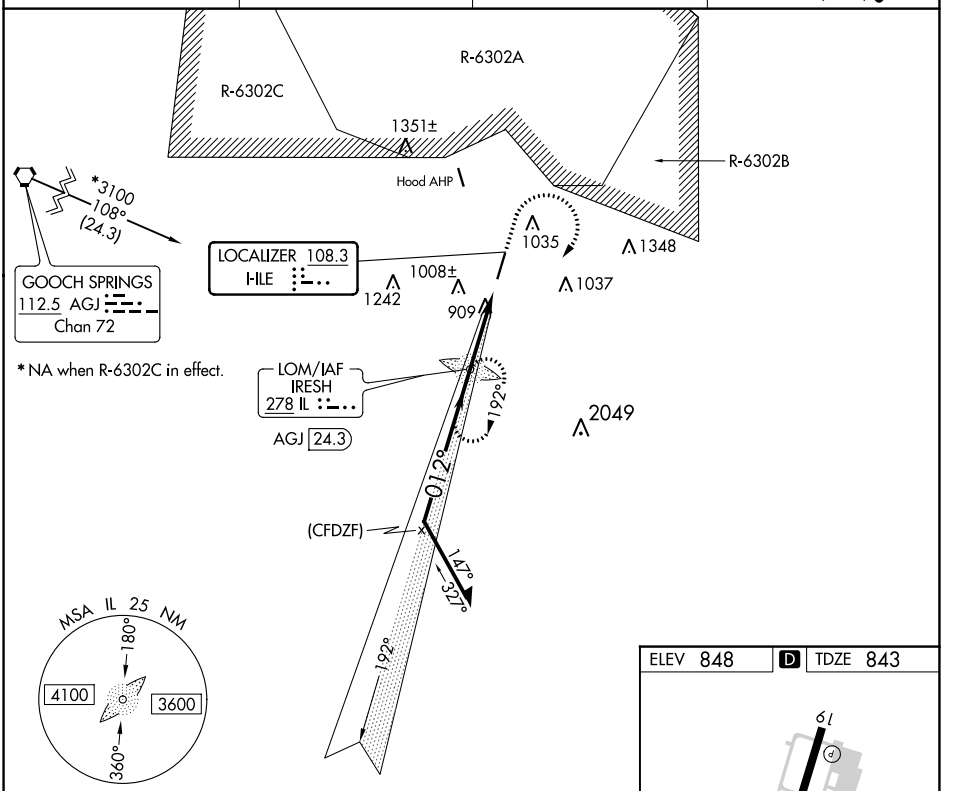

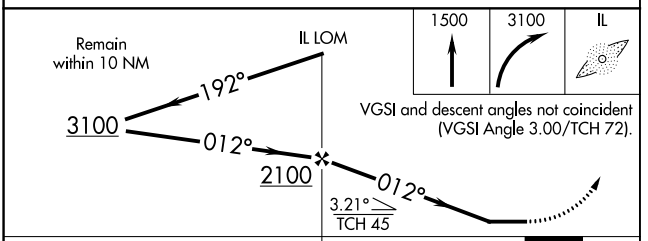
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-1 | 1160-1 | 317 (400-1) | | NA |
| C CIRCLING | 1300-1<br>452 (500-1) | 1340-1<br>492 (500-1) | 1440-1½<br>592 (600-1½) | NA |

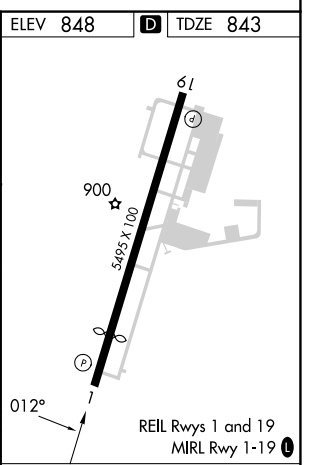


FAF to MAP 3.6 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 3:36 | 2:24 | 1:48 | 1:26 | 1:12 |



SC-3, 22 FEB 2024 to 21 MAR 2024
SC-3, 22 FEB 2024 to 21 MAR 2024

| WAAS CH 50239 W01A | APP CRS 012° | Rwy Idg 4651<br>TDZE 844<br>Apt Elev 848 |
|---|---|---|


# RNAV (GPS) RWY 1


SKYLARK FLD (ILE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling Rwy 19 NA at night.


MISSED APPROACH: Climb to 1300 then Climbing right turn to 3100 direct IZSUN and hold.

| AWOS-3PT | GRAY APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 128.575 | 120.075 323.15 | 121.7 | 122.7 (CTAF) L |

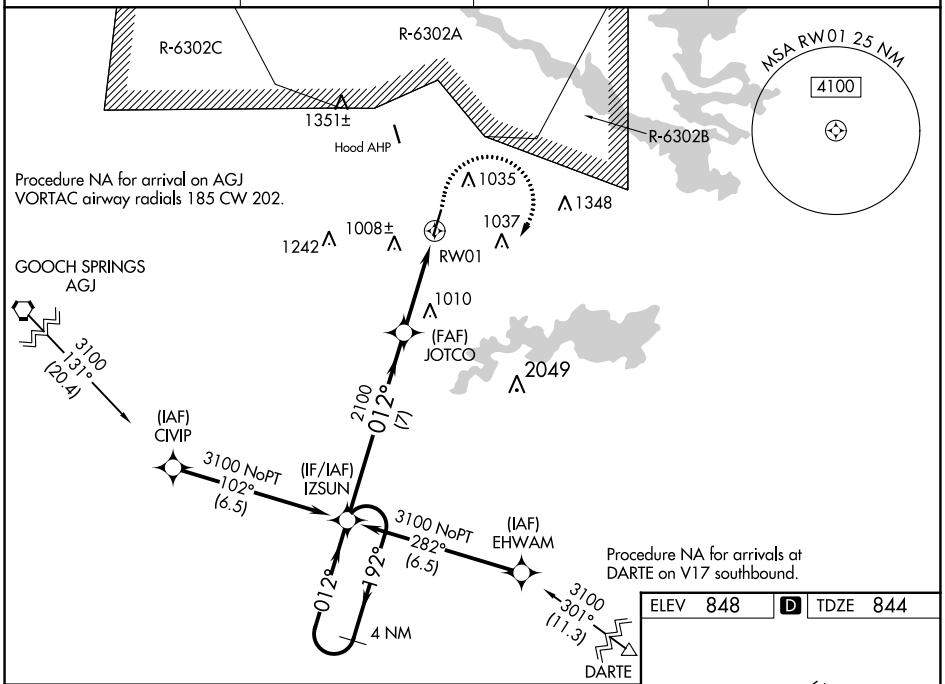

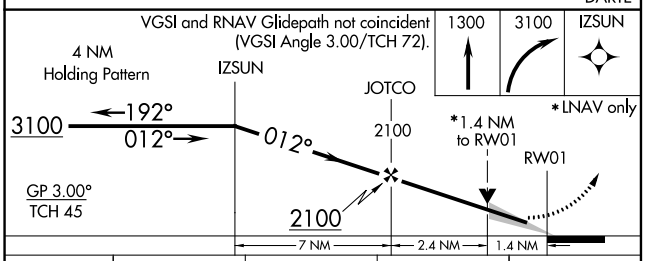
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1044-¾ 200 (200-¾) | | | NA |
| LNAV/VNAV DA | 1608-3 764 (800-3) | | | NA |
| LNAV MDA | 1360-1 516 (600-1) | | 1360-1⅜ 516 (600-1⅜) | NA |
| C CIRCLING | 1360-1 512 (500-1) | | 1440-1½ 592 (600-1½) | NA |



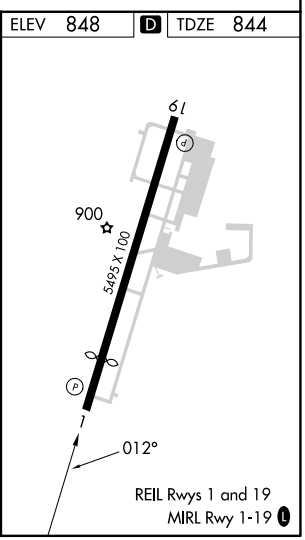


SC-3, 22 FEB 2024 to 21 MAR 2024
SC-3, 22 FEB 2024 to 21 MAR 2024

| VOR/DME GRK | APP CRS | Rwy Idg | N/A |
|---|---|---|---|
| 111.8 | 057° | TDZE | N/A |
| Chan 55 | | Apt Elev | 848 |


# VOR-A
## SKYLARK FLD (ILE)


T
A NA


Circling Rwy 19 NA at night.
When local altimeter setting not received, use Robert Gray AAF altimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climbing right turn to 3000 direct GRK VOR/DME and hold.

| AWOS-3PT | GRAY APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 128.575 | 120.075 323.15 | 121.7 | 122.7 (CTAF) L |

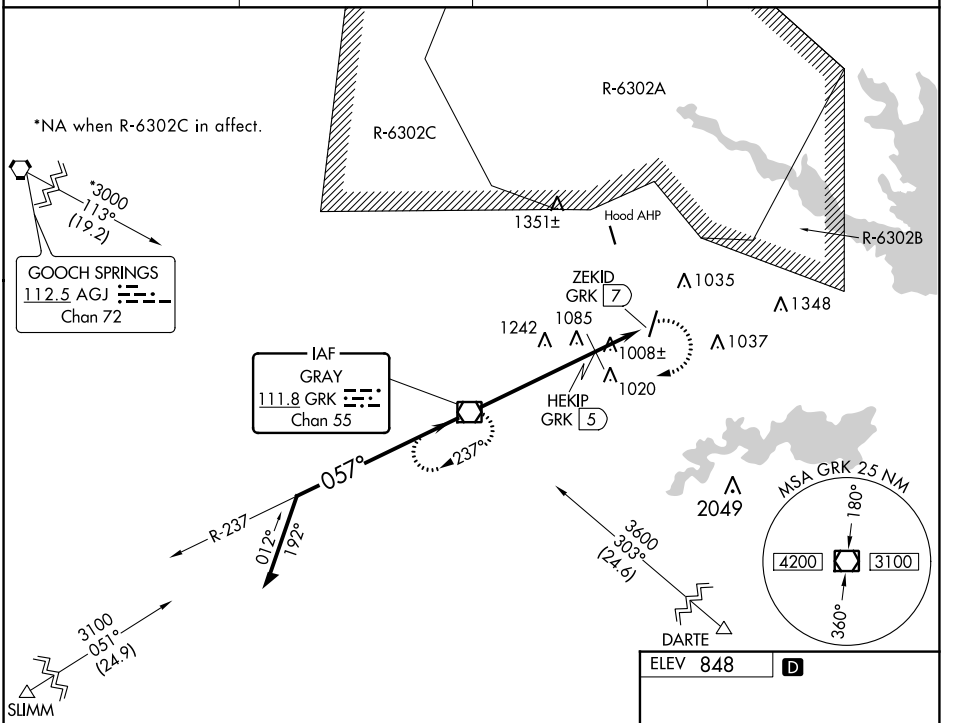

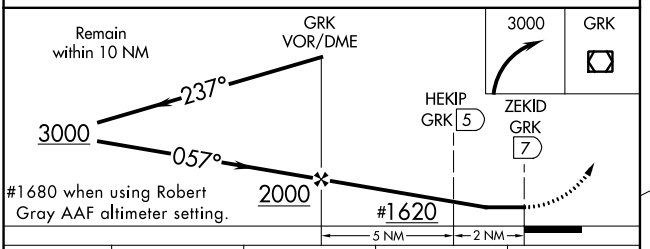
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| C CIRCLING | 1620-1<br>772 (800-1) | 1620-1¼<br>772 (800-1¼) | 1620-2¼<br>772 (800-2¼) | NA |
| HEKIP FIX MINIMUMS (DME REQUIRED) | | | | |
| C CIRCLING | 1320-1<br>472 (500-1) | 1360-1<br>512 (600-1) | 1440-1½<br>592 (600-1½) | NA |
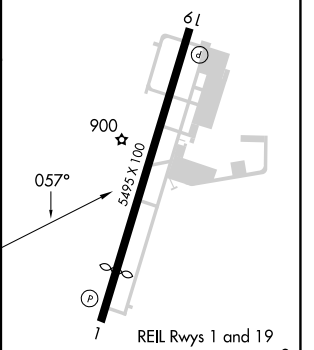
| FAF to MAP 7 NM | | | | | |
|---|---|---|---|---|---|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 7:00 | 4:40 | 3:30 | 2:48 | 2:20 |



SC-3, 22 FEB 2024 to 21 MAR 2024
SC-3, 22 FEB 2024 to 21 MAR 2024