

LOC I-MMV 110.9	APP CRS 218°	Rwy Idg TDZE 161 Apt Elev 163
---------------------------	------------------------	---




ILS or LOC RWY 22
MC MINNVILLE MUNI (MMV)

V DME required. When local altimeter setting not received, use Aurora State altimeter setting: increase all DA to 403 feet; increase all MDA 60 feet and S-LOC 22 all Cats and Circling Cat C visibility ¼ SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing right turn to 3000 via heading 069° and UBG VOR/DME R-204 to LUSEY/UBG VOR/DME 6 DME and hold, continue climb-in-hold to 3000.

ASOS 135.675	PORTLAND APP CON 126.0 284.6 (NORTH)	SEATTLE CENTER 125.8 291.7 (SOUTH)	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 0
------------------------	--	--	---------------------------	---------------------------------

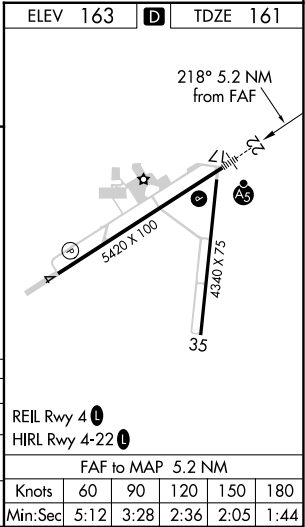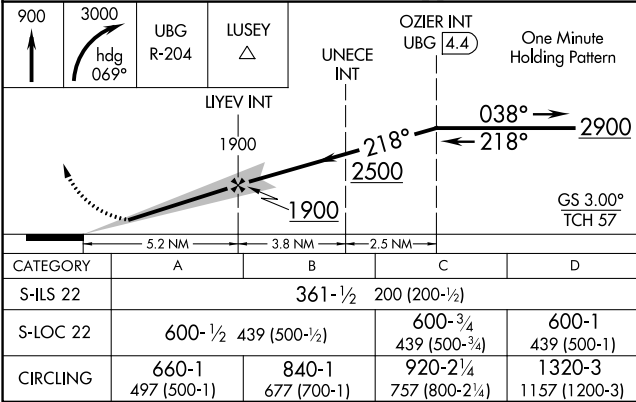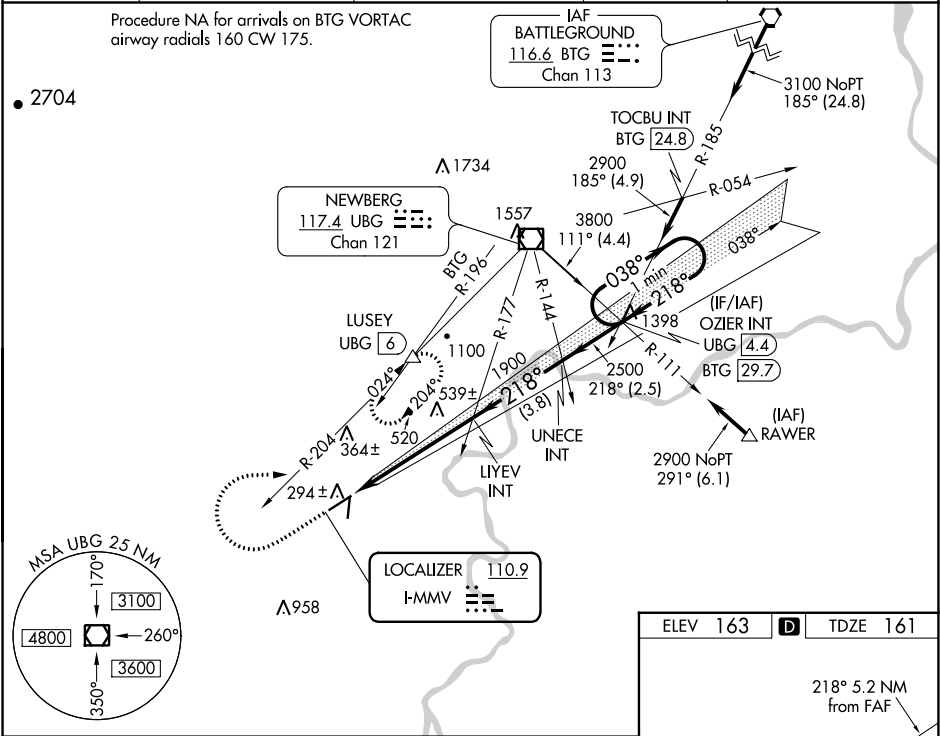

NW-1, 22 FEB 2024 to 21 MAR 2024

NW-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH 50309 W22A	APP CRS 218°	Rwy Idg 5420 TDZE 161 Apt Elev 163
--	------------------------	---

RNAV (GPS) RWY 22

MC MINNVILLE MUNI (MMV)

RNP APCH.


V Baro-VNAV NA when using Aurora State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. When local altimeter setting not received, use Aurora State altimeter setting; increase LPV DA to 534 feet, LNAV/VNAV DA to 703 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ½ SM. For inop ALS, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. For inop ALS when using Aurora State altimeter setting, increase LNAV/VNAV all Cats visibility to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. VDP NA when using Aurora State altimeter setting.

MALSR




MISSED APPROACH:
Climb to 4900 direct
OVUGE then on 218°
track to PUCIV and hold,
continue climb-in-hold
to 4900.

ASOS 135.675	PORTLAND APP CON 126.0 284.6 (NORTH)	SEATTLE CENTER 125.8 291.7 (SOUTH)	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 1
------------------------	--	--	---------------------------	--

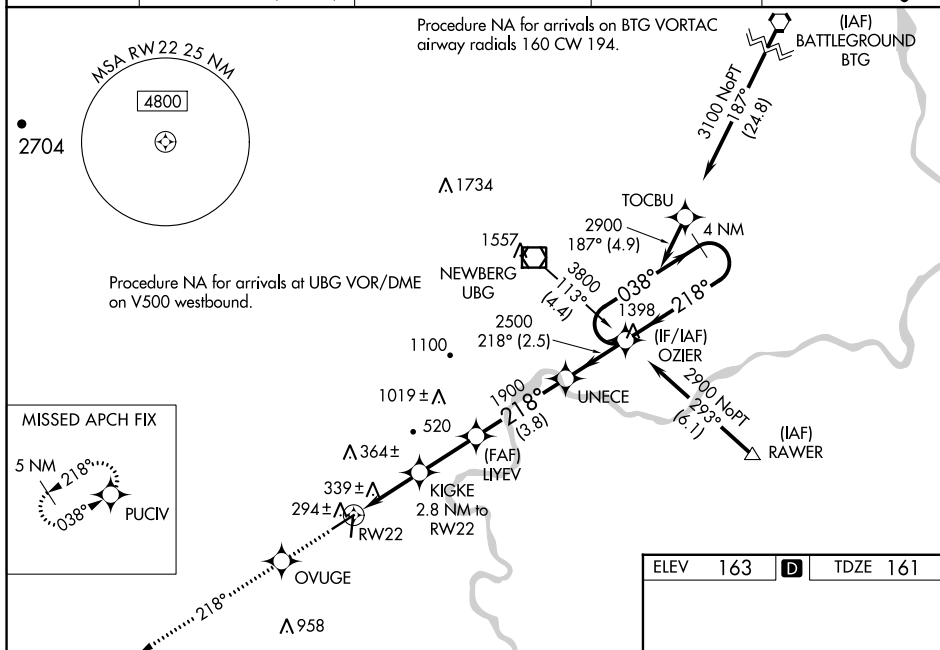

* RNAV only KIGKE 2.8 NM to RW22 LIYEV 1900 UNECE OZIER 4 NM Holding Pattern 038° → 2900 ← 218° GP 3.00° TCH 57 RW22 * 1.7 NM to RW22 1.7 1.1 2.4 NM 3.8 NM 2.5 NM					
CATEGORY	A	B	C	D	
LPV DA	474- ³ / ₄ 313 (400- ³ / ₄)				
RNAV/VNAV DA	643-1 ¹ / ₄ 482 (500-1 ¹ / ₄)				
RNAV MDA	740- ³ / ₄ 579 (600- ³ / ₄)		740-1 ¹ / ₄ 579 (600-1 ¹ / ₄)		

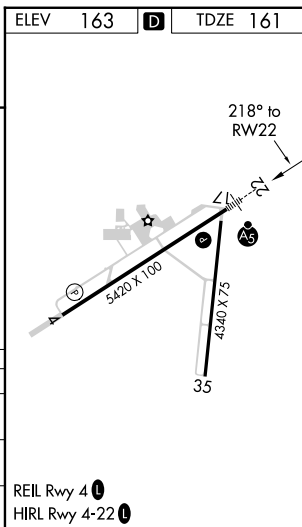

RNAV (GPS) RWY 22

APP CRS
038°

Rwy Idg
TDZE
161

Apt Elev
163

RNAV (GPS) RWY 4

MC MINNVILLE MUNI (MMV)


RNP APCH.

▼

When local altimeter setting not received, use Aurora State altimeter setting and increase all MDA 60 feet and visibility Cats C/D to 1¾. Rwy 4 helicopter visibility reduction below ¾ SM NA.



MISSED APPROACH: Climbing left turn to 4900 direct PUCIV and hold, continue climb-in-hold to 4900.

ASOS 135.675	PORTLAND APP CON 126.0 284.6 (NORTH)	SEATTLE CENTER 125.8 291.7 (SOUTH)	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 0
------------------------	--	--	---------------------------	---------------------------------

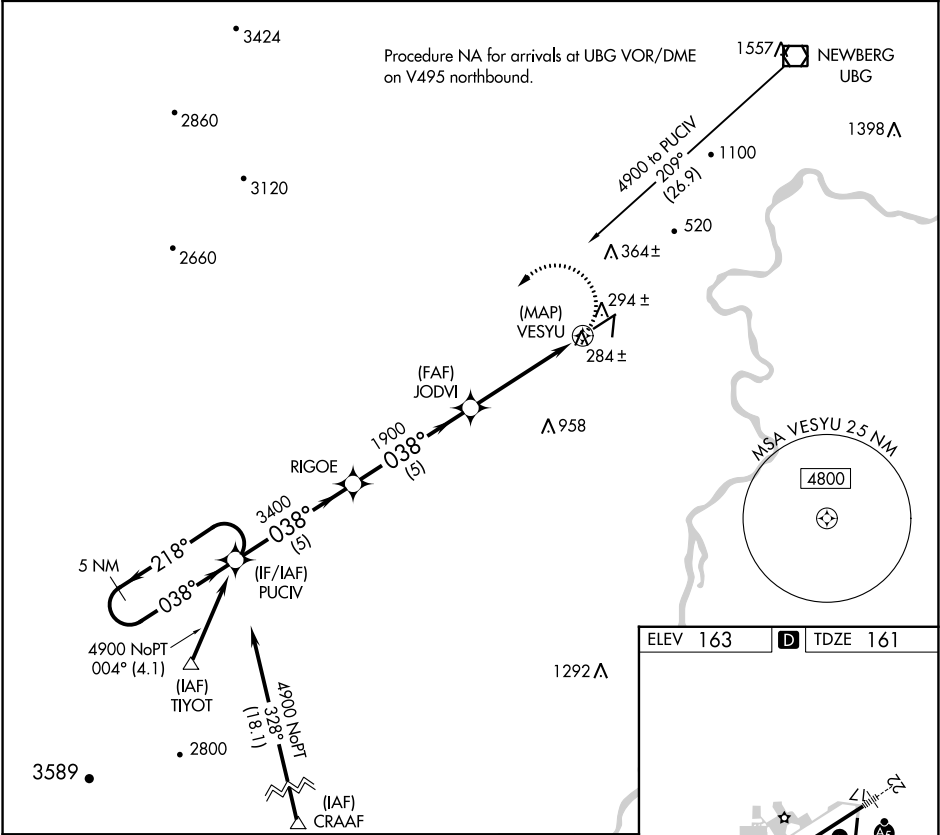

ELEV 163

TDZE 161

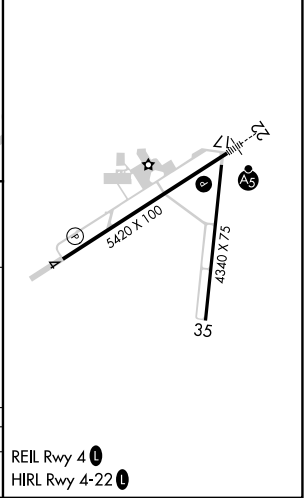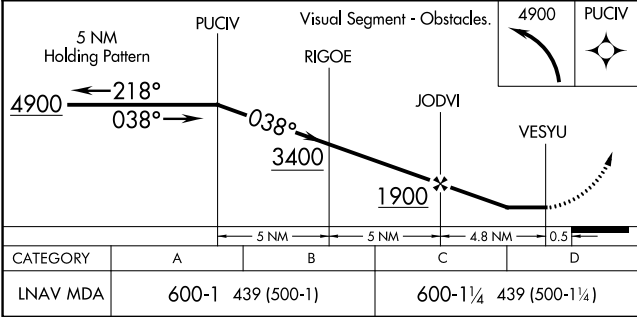

VOR/DME UBG 117.4 Chan 121	APP CRS 014°	Rwy Idg TDZE Apt Elev N/A N/A 163	VOR/DME-B MC MINNVILLE MUNI (MMV)
--	------------------------	---	---



When local altimeter setting not received, use Aurora State altimeter setting: increase all MDA 60 feet and Circling Cat C visibility 1/4 SM.

MISSED APPROACH: Climbing left turn to 4800 via heading 180° and UBG VOR/DME R-204 to COGOK/UBG 23 DME and hold, continue climb-in-hold to 4800.

ASOS 135.675	PORTLAND APP CON 126.0 284.6 (NORTH)	SEATTLE CENTER 125.8 291.7 (SOUTH)	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 
------------------------	--	--	---------------------------	---

