APP CRS	Rwy Idg	3498
125°	TDZE	991
	Apt Elev	993

RNAV (GPS) RWY 13
MARION MUNI (MNN)

RNP APCH.

Rwy 13 helicopter visibility reduction below ¾ SM NA. VDP NA when using Ohio State University altimeter setting. When local altimeter setting not received, use Ohio State University altimeter setting: increase all MDAs 100 feet and visibility Cat C/D ⅜ SM.

MISSED APPROACH: Climb to 3000 direct NACIS and on track 045° to LEBJE and hold.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
119.975	124.2 360.65	126.8	122.8 (CTAF) L

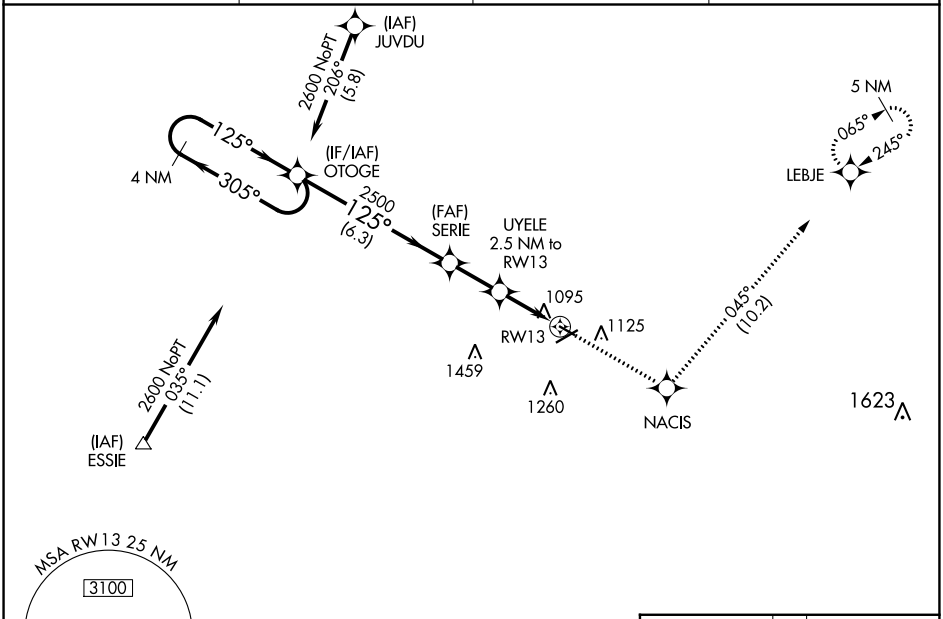



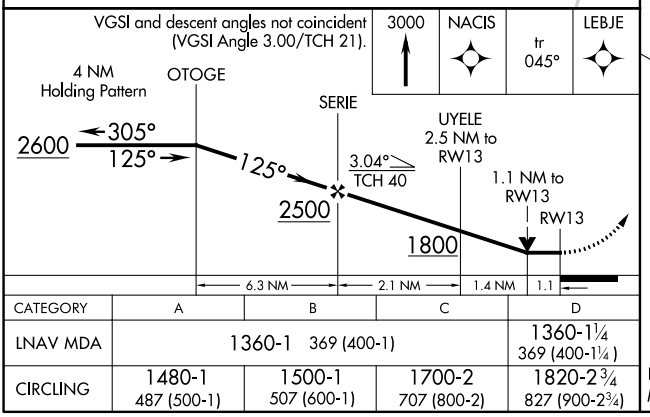

CATEGORY	A	B	C	D
LNAV MDA	1360-1 369 (400-1)			1360-1¼ 369 (400-1¼)
CIRCLING	1480-1 487 (500-1)	1500-1 507 (600-1)	1700-2 707 (800-2)	1820-2¾ 827 (900-2¾)

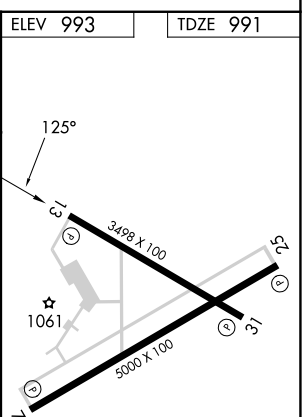

REIL Rwys 7, 13, 25 and 31 L
MIRL Rwys 7-25 and 13-31 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 25

MARION MUNI (MNN)

WAAS	APP CRS	Rwy Idg	5000
CH 62904	245°	TDZE	993
W25A		Apt Elev	993

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Ohio State University altimeter setting. Rwy 25 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ohio State University altimeter setting and increase LPV DA to 1421 feet, increase LNAV/VNAV DA to 1530 feet; increase all MDAs 100 feet and visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2600 direct CABDA and hold.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
119.975	124.2 360.65	126.8	122.8 (CTAF) L

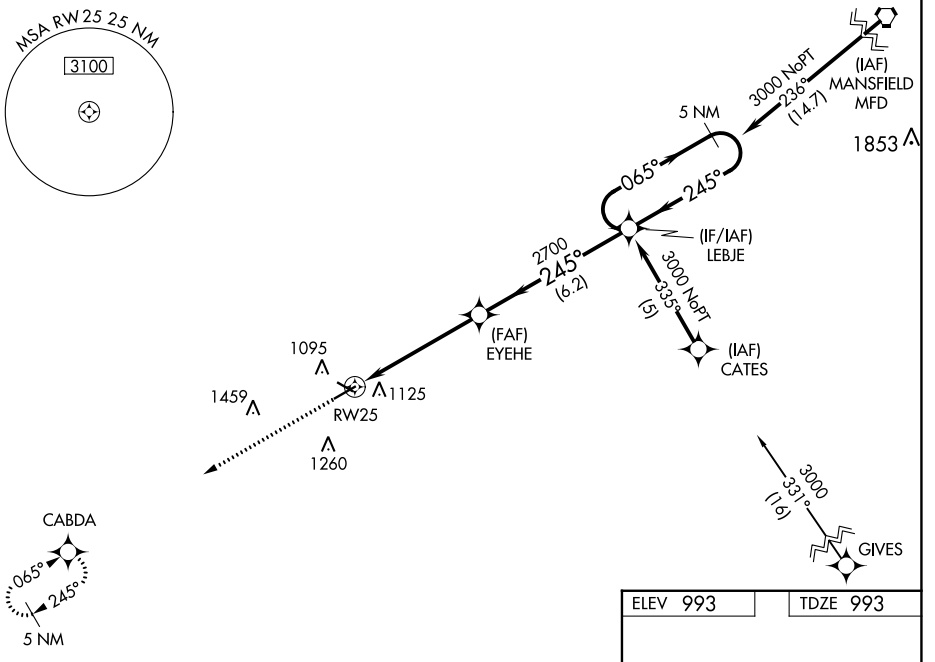

ELEV 993	TDZE 993

2600 CABDA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).

5 NM Holding Pattern

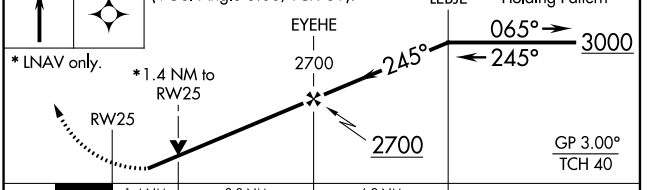



CATEGORY	A	B	C	D
LPV DA	1334-1¼ 341 (400-1¼)			
LNAV/VNAV DA	1443-1½ 450 (500-1½)			
LNAV MDA	1460-1 467 (500-1)		1460-1⅝ 467 (500-1⅝)	
CIRCLING	1480-1 487 (500-1)	1500-1 507 (600-1)	1700-2 707 (800-2)	1820-2¾ 827 (900-2¾)

REIL Rwys 7, 13, 25 and 31 L
MIRL Rwys 7-25 and 13-31 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

WAAS	APP CRS	Rwy Idg	5000
CH 93604	065°	TDZE	990
W07A		Apt Elev	993

RNAV (GPS) RWY 7

MARION MUNI (MNN)

When local altimeter setting not received, use Ohio State University altimeter setting and increase LPV DA to 1327 feet, increase LNAV/VNAV DA to 1574 feet; increase all MDAs 100 feet and visibility Cat C/D ¼ SM. Baro-VNAV NA when using Ohio State University altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 46°C (114°F). Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct LEBJE and hold.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
119.975	124.2 360.65	126.8	122.8 (CTAF) L

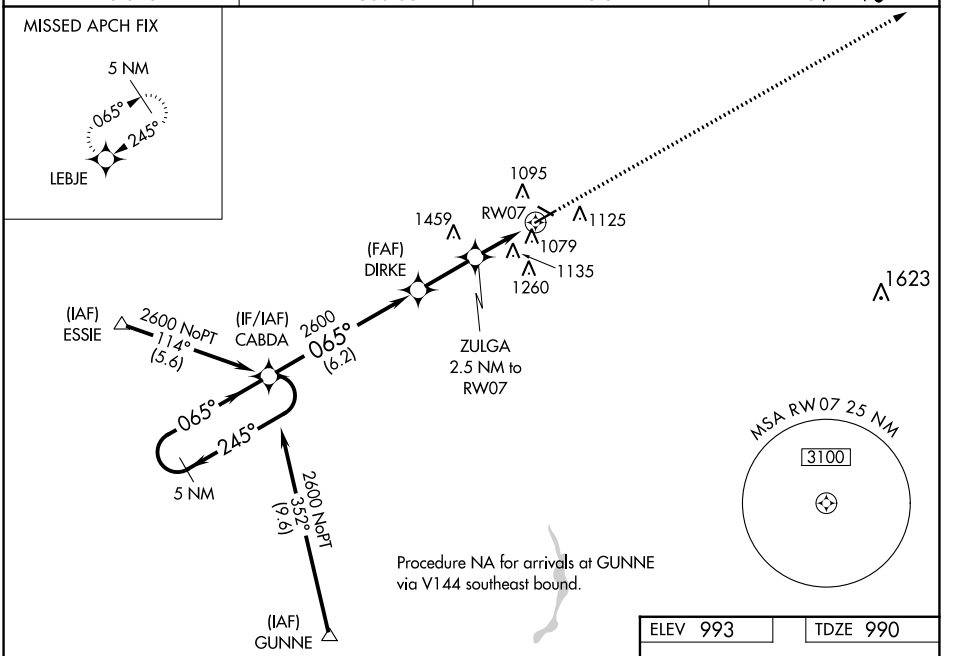

ELEV 993 TDZE 990

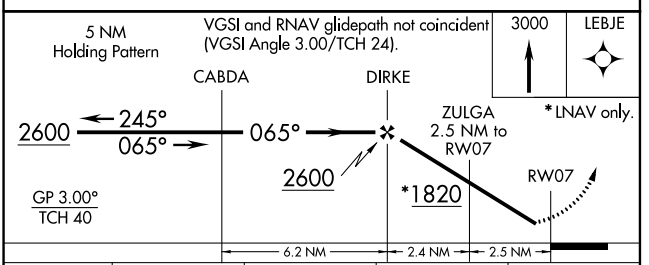

CATEGORY	A	B	C	D
LPV DA	1240-1 250 (300-1)			
LNAV/VNAV DA	1379-1½ 389 (400-1½)			
LNAV MDA	1440-1 450 (500-1)		1440-1¼ 450 (500-1¼)	1440-1½ 450 (500-1½)
CIRCLING	1480-1 487 (500-1)	1500-1 507 (600-1)	1700-2 707 (800-2)	1820-2¾ 827 (900-2¾)



REIL Rwys 7, 13, 25 and 31 L
MIRL Rwys 7-25 and 13-31 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

VOR BUD	APP CRS	Rwy Idg	N/A
109.8	261°	TDZE	N/A
		Apt Elev	993

VOR-A
MARION MUNI (MNN)

RADAR required for procedure entry.

When local altimeter setting not received, use Ohio State University altimeter setting: increase MDA 100 feet and visibility Cat C/D ¼ SM.

MISSED APPROACH: Climbing right turn to 2900 in BUD VOR holding pattern.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
119.975	124.2 360.65	126.8	122.8 (CTAF) L

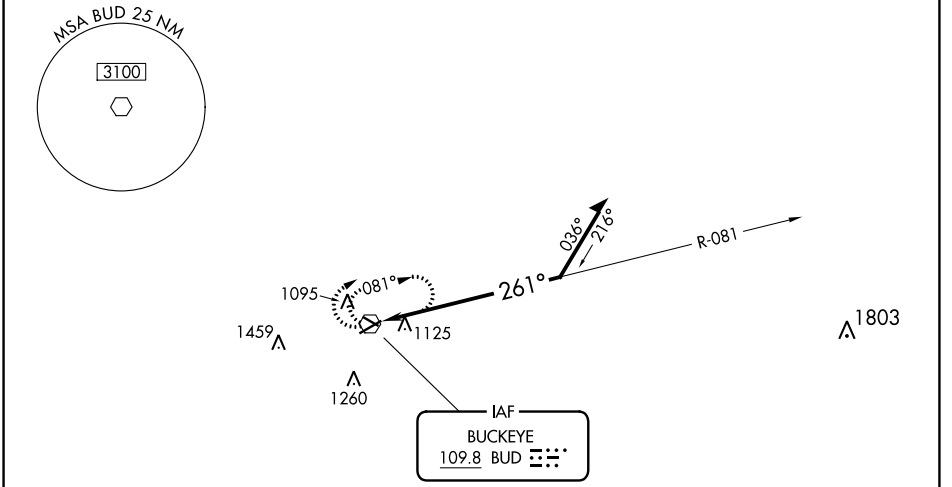



REIL Rwys 7, 13, 25 and 31 L
MIRL Rwys 7-25 and 13-31 L

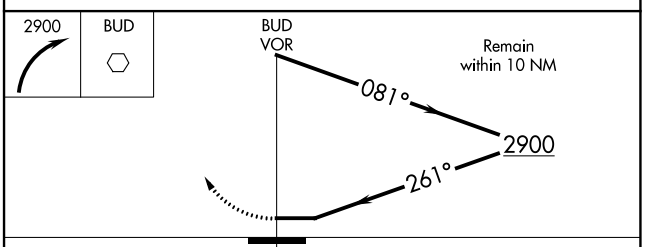

CATEGORY	A	B	C	D
CIRCLING	1640-1	647 (700-1)	1700-2 707 (800-2)	1820-2¾ 827 (900-2¾)

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024