




ATIS • 125.55 363.05
CINC DEL
120.75 279.55
GND CON
121.6 360.2
POINT MUGU TOWER •
124.85 290.375
POINT MUGU DEP CON
128.65 307.275


Rwy	Knots	60	120	180	240	300	360
*03[cl]	V/V(fpm)	205	410	615	820	1025	1230
†03[b]	V/V(fpm)	215	430	645	860	1075	1290
†21[b]	V/V(fpm)	232	464	696	928	1160	1392
†27[b]	V/V(fpm)	212	424	636	848	1060	1272

* Minimum † ATC Climb Rate
(cl) to 700
(b) to 5500

POINT MUGU
Chon 43 NTD
☼☼☼

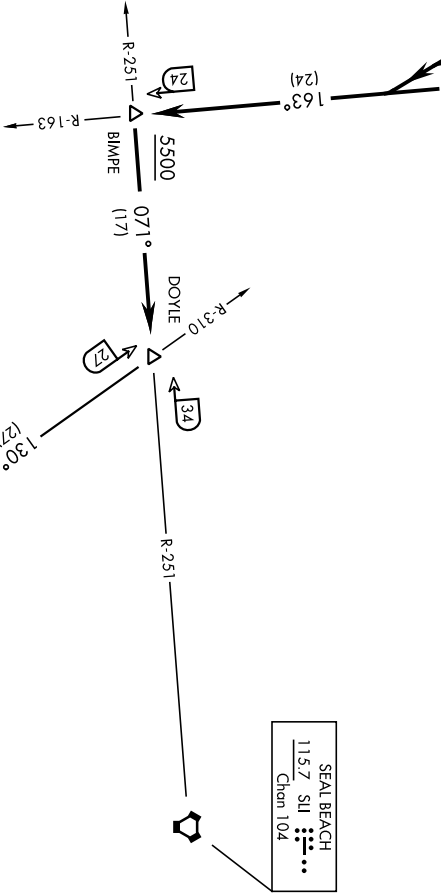

TACAN REQUIRED



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 3: Climbing left turn within 3 DME of NTD TACAN, direct NTD, thence...

TAKE-OFF RWY 21, 27: Left turn, thence...

Intercept NTD R-163 and via NTD R-163 to BIMPE (NTD R-163/24 DME), then via SU VORTAC R-251 to DOYLE, then via assigned routing. Cross BIMPE at or above 5500.


SANTA CATALINA TRANSITION (DOYLE 9 • SXC): DOYLE (SU R-251 /34 DME) to SANTA CATALINA VORTAC via SXC R-310. Then as filed.

DOYLE-NINE DEPARTURE (DOYLE 9 • DOYLE)

OXNARD, CALIFORNIA
POINT MUGU NAS (NAVAL BASE VENTURA CO) (KNTD)



SAN MARCUS ONE DEPARTURE (RZS 1 • RZS)										OXNARD, CALIFORNIA			
ATIS ★ 125.55 363.05		AL-925 [USN]											
CINC DEL	120.75 279.55												
GND CON	121.6 360.2												
TOWER ★	124.85 290.375												
DEP CON	28.65 307.275												
		Rwy	Knots	60	120	180	240	300	360				
		*03⑥	V/V(fpm)	205	410	615	820	1025	1230				
		+21⑤	V/V(fpm)	216	432	648	864	1080	1296				
		+27⑤	V/V(fpm)	214	428	642	856	1070	1284				
												* Minimum † ATC Climb Rate	
												⑥ to 700	
												⑤ to 8900	

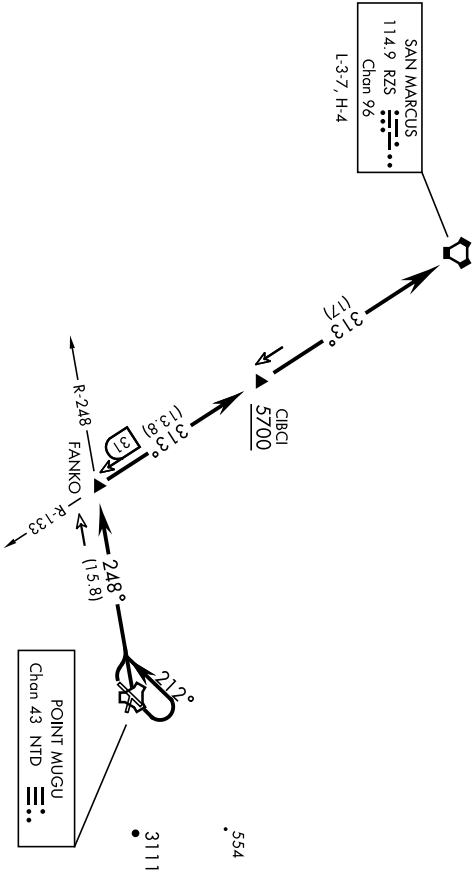

TACAN REQUIRED

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWY 3: Climbing left turn to 212° within 3 DME of NTD TACAN, thence...
- TAKEOFF RWY 21: Turn right, thence...
- TAKEOFF RWY 27: Turn left, thence...
- ...intercept NTD R-248 and via NTD R-248 to FANKO (NTD R-248/16 DME), then via RZS VORTAC R-133 to RZS VORTAC, then via assigned routing.
- Cross CIBCI (RZS R-133/17 DME) at or above 5700.