

WAAS CH 69633 W15A	APP CRS 155°	Rwy Idg TDZE 769 Apt Elev 769	3304
--	------------------------	---	-------------

RNAV (GPS) RWY 15

MAQUOKETA MUNI (OQW)


⚠

NA

DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA.
Night landing: Rwy 15 NA. Obtain local altimeter on CTAF; when not received, use Dubuque altimeter setting and increase all MDA 100 feet.

MISSED APPROACH: Climb to 3000
direct NAZVI and hold.

CHICAGO CENTER 133.95 281.4	UNICOM 122.725 (CTAF) 0
---------------------------------------	-----------------------------------

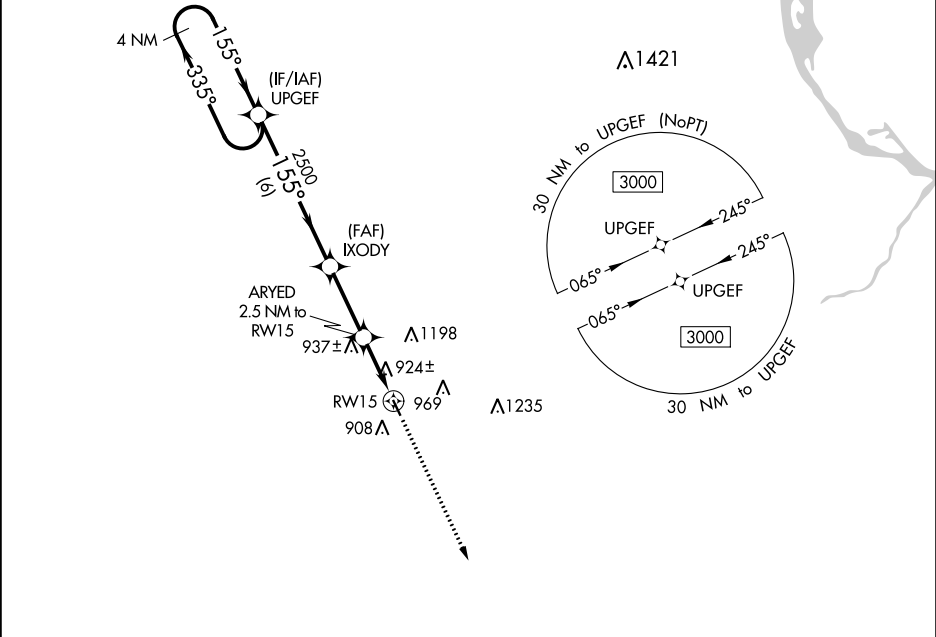

ELEV 769

TDZE 769

NAZVI

155°

335°

4 NM

Visual Segment - Obstacles.

3000

NAZVI

4 NM Holding Pattern

UPGEF

IXODY

ARYED 2.5 NM to RW15

RW15

3000

335°

155°

2500

1600

6 NM

2.8 NM

2.5 NM

CATEGORY	A	B	C	D
LP MDA	1180-1	411 (500-1)	NA	
LNAV MDA	1200-1	431 (500-1)	NA	
CIRCLING	1240-1 471 (500-1)	1400-1 631 (700-1)	NA	

REIL Rwys 15 and 33 0

MIRL Rwy 15-33 0

WAAS CH 82733 W33A	APP CRS 335°	Rwy Idg TDZE 766 Apt Elev 769
--	------------------------	---

RNAV (GPS) RWY 33

MAQUOKETA MUNI (OQW)

⚠

NA

Circling to Rwy 15 NA at night. Baro-VNAV NA when using Dubuque altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Obtain local altimeter on CTAF; when not received, use Dubuque altimeter setting and increase all DA 92 feet and all MDA 100 feet. Increase LPV all Cats visibility to 1¼ mile and LNAV/VNAV all Cats visibility to 1½ mile.

MISSED APPROACH: Climb to 3000 direct UPGEF and hold.

CHICAGO CENTER 133.95 281.4	UNICOM 122.725 (CTAF) 0
---------------------------------------	-----------------------------------

MISSED APCH FIX

4 NM

155°

335°

UPGEF

Δ1198

969

Δ1235

908 Δ

873 ±

WETOK

2.3 NM to RW33

1275 Δ

(FAF) YOPGU

1600

335°

(IF) NAZVI

155°

335°

4 NM

30 NM to NAZVI

3000

245°

NAZVI

065°

3000

245°

NAZVI

065°

15 NM to NAZVI

3100

30 NM to NAZVI (NoPT)

ELEV 769

TDZE 766

91

3304 X 60

0.9% UP

33

REIL Rwy 15 and 33 0

MIRL Rwy 15-33 0

335°

3000

UPGEF

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 58).

*LNAV only

WETOK

2.3 NM to RW33

*1.2 NM to RW33

RW33

1620*

1.2 NM

1.1 NM

2.3 NM

6 NM

YOPGU

2500

335°

2500

NAZVI

4 NM Holding Pattern

155°

335°

3000

GP 3.50°

TCH 40

CATEGORY	A	B	C	D
LPV DA	1106-1	340 (400-1)	NA	
LNAV/VNAV DA	1064-1	298 (300-1)	NA	
LNAV MDA	1140-1	374 (400-1)	NA	
CIRCLING	1240-1 471 (500-1)	1400-1 631 (700-1)	NA	

MAQUOKETA, IOWA

Amdt 1A 29MAY14

42°03'N-90°44'W

MAQUOKETA MUNI (OQW)

RNAV (GPS) RWY 33