


WAAS CH 53617 W14A	APP CRS 139°	Rwy Idg 5608 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 14
ARANSAS COUNTY (RKP)


Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet increase LNAV/VNAV all Cats visibility ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH:
Climb to 2000 direct PITYI and hold.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

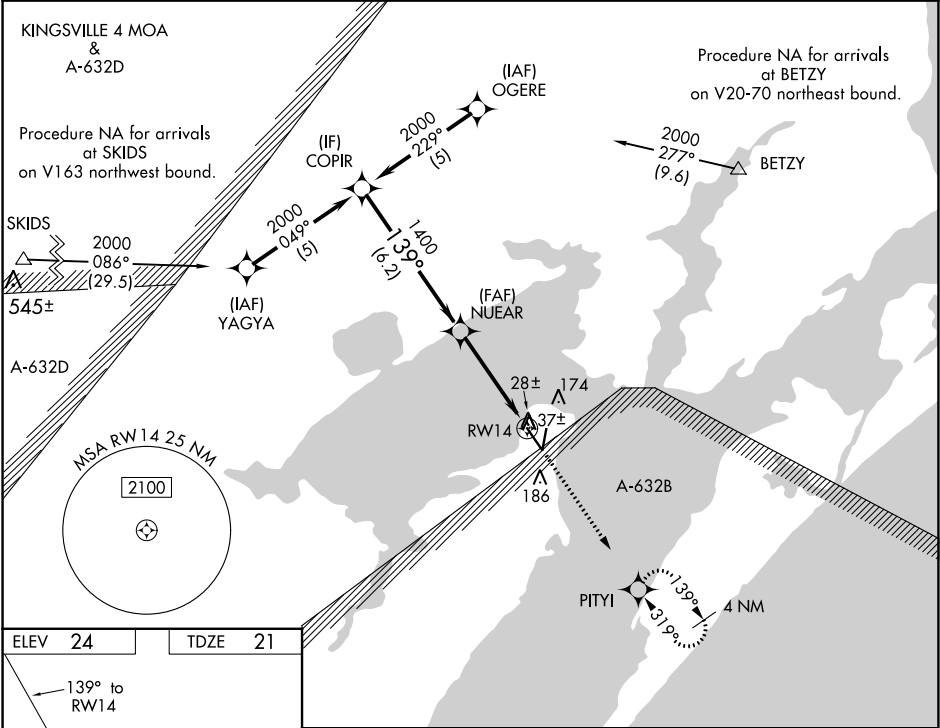

ELEV 24	TDZE 21
----------------	----------------

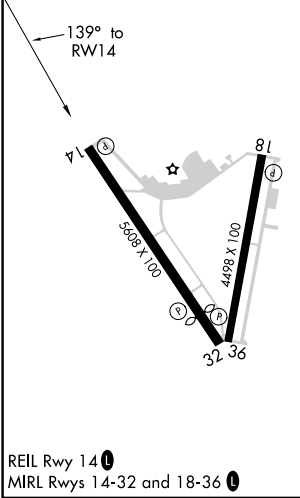

Procedure Turn NA	COPIR	* LNAV only	2000	PITYI
2000	NUEAR	1400	1400	
GP 3.00° TCH 35	6.2 NM	3.3 NM	0.9 NM	
CATEGORY	A	B	C	D
LPV DA	271-1	250 (300-1)		NA
LNAV/VNAV DA	378-1¼	357 (400-1¼)		NA
LNAV MDA	320-1	299 (300-1)		NA
CIRCLING	500-1	476 (500-1)	500-1½ 476 (500-1½)	NA

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 50517 W18A	APP CRS 184°	Rwy ldg TDZE Apt Elev	4498 22 24
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 18

ARANSAS COUNTY (RKP)

Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet; increase LNAV/VNAV visibility all Cats ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH: Climb to 2000 direct YAYUR and on track 108° to PITYI and hold, continue climb-in-hold to 2000.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

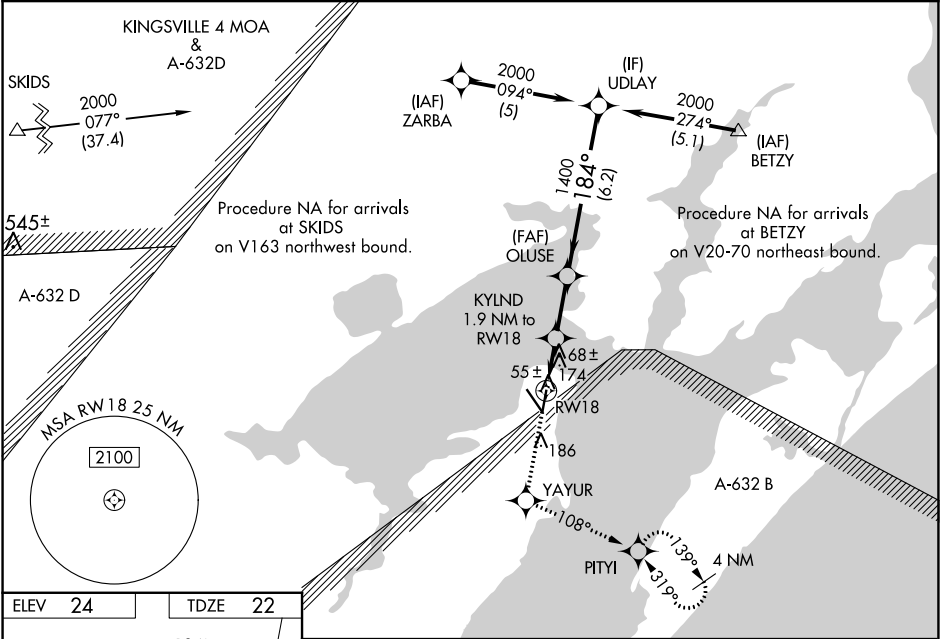

ELEV 24

TDZE 22

184° to RW18

3508 X 100

4498 X 100

32 36

REIL Rwy 14 0

MIRL Rwy 14-32 and 18-36 0

2000	YAYUR	tr 108°	PITYI	UDLAY	Procedure Turn NA
*LNAV only				OLUSE	
		KYLND 1.9 NM to RW18		1400	2000
		*1.2 NM to RW18			GP 3.00°
					TCH 39°
CATEGORY	A	B	C	D	
LPV DA	272-1	250 (300-1)		NA	
LNAV/VNAV DA	459-1½	437 (500-1½)		NA	
LNAV MDA	440-1	418 (500-1)	440-1¼ 418 (500-1¼)	NA	
CIRCLING	500-1	476 (500-1)	500-1½ 476 (500-1½)	NA	

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 45917 W32A	APP CRS 319°	Rwy Idg TDZE 24 Apt Elev 24	5608
--	------------------------	---	-------------



RNAV (GPS) RWY 32

ARANSAS COUNTY (RKP)

⚠ Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet, increase LNAV Cat C visibility ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH:
Climb to 2000 direct COPIR and hold.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

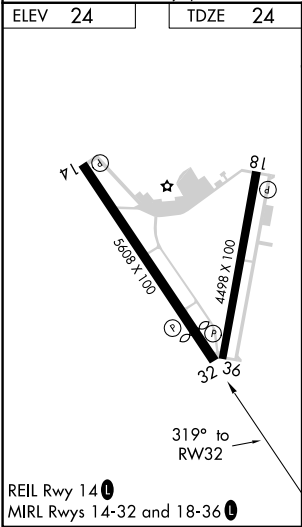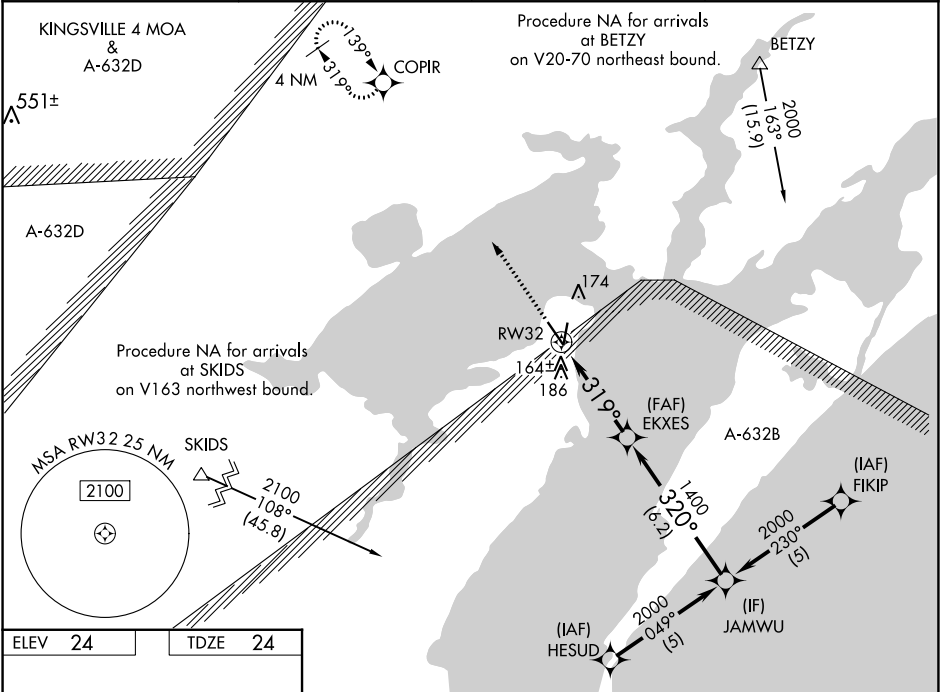

2000 COPIR

VGSI and RNAV glidepath not coincident. (VGSI Angle 3.00/TCH 25)

Procedure Turn NA

***LNAV only**

***1.2 NM to RW32**

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA	274-1	250 (300-1)		NA
LNAV/VNAV DA	508-1¾	484 (500-1¾)		NA
LNAV MDA	420-1	396 (400-1)		NA
CIRCLING	500-1	476 (500-1)	500-1½ 476 (500-1½)	NA

WAAS CH 61317 W36A	APP CRS 004°	Rwy Idg TDZE 23 Apt Elev 24	4498
--	------------------------	---	-------------

RNAV (GPS) RWY 36

ARANSAS COUNTY (RKP)



▼

▲

Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet. VDP NA with Ingleside altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
UDLAY and hold.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

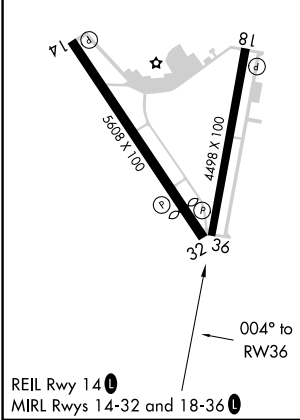
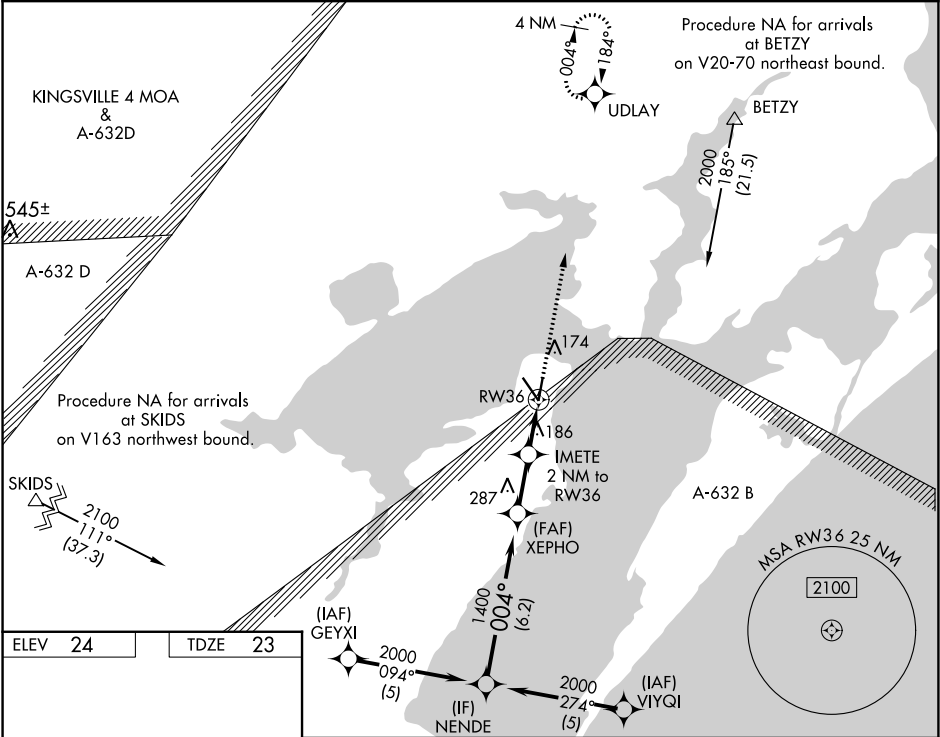


NENDE				XEPHO			
2000				1400			
Procedure Turn NA				IMETE 2 NM to RW36			
GP 3.00°				* 1.2 NM to RW36			
TCH 42				RW36			
6.2 NM				2.1 NM		0.8 + 1.2	
CATEGORY	A		B		C		D
LPV DA	273-1		250 (300-1)				NA
LNAV/VNAV DA	498-1¾		475 (500-1¾)				NA
LNAV MDA	440-1		417 (500-1)		440-1¼ 417 (500-1¼)		NA
CIRCLING	500-1		476 (500-1)		500-1½ 476 (500-1½)		NA

VORTAC CRP	APP CRS	Rwy Idg	N/A
115.5	054°	TDZE	N/A
Chan 102		Apt Elev	24

VOR or TACAN-A
ARANSAS COUNTY (RKP)

DME required.		MISSED APPROACH: Climbing left turn to 1600 on heading 360° and CRP VORTAC R-045 to COPAN/16 DME and hold.	
ASOS	CORPUS APP CON	CLNC DEL	UNICOM
119.275	120.9 348,725	121.7	123.05 (CTAF) 1

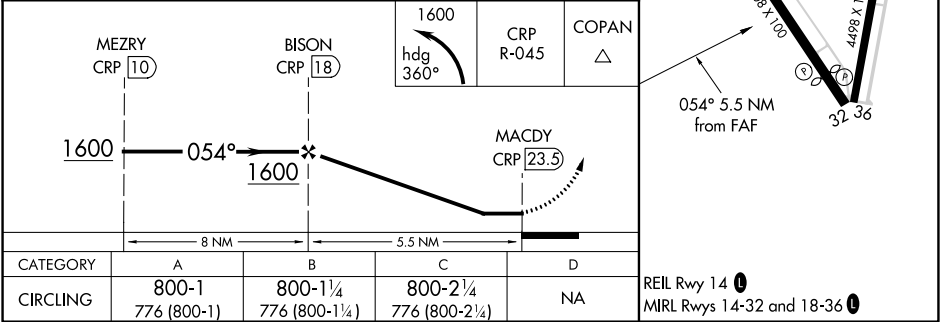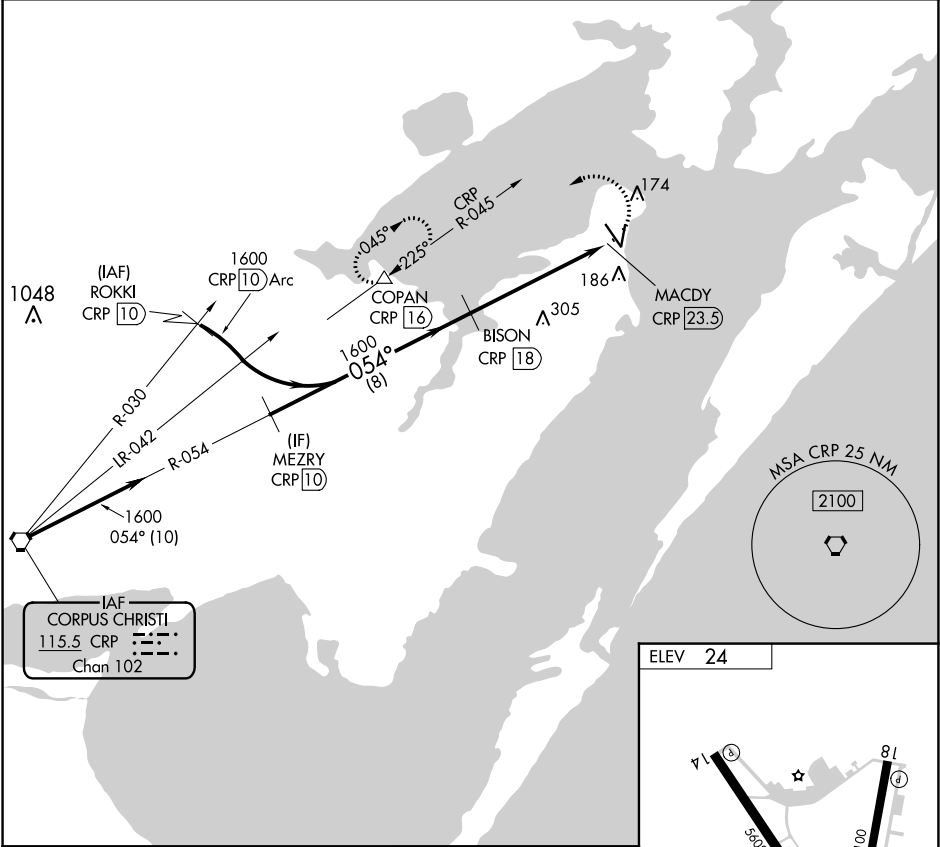

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024