


ROSWELL, NEW MEXICO
100/DME 1-BOW

LOC/DME I-ROW	APC
109.9	2
Chan 36	
DME required.	
 NA ** When ALS ** When ALS	
ATIS 128.45 306.2	

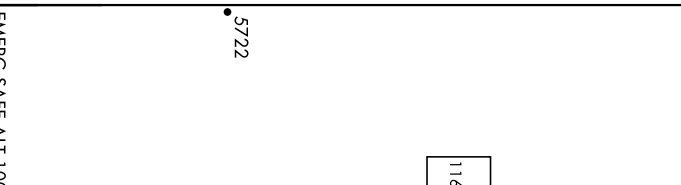

EMERG SAFE ALT 100 NM 14,300

5000	6500	
CATEGORY		
S-115 21 *		
S-100 21 **		
C CIRCLING	41	
	469	

Amdt 8B 06OCT22

ROSWELL, NEW MEXICO

33°18'N-104°32'W

ROSWELL AIR CENTER (KROW)

Amdt 8B 06OCT22

HI-ILS Y or LOC Y RWY 21

ILS Z or LOC Z RWY 21
ROSWELL AIR CENTER (ROW)

MISSED APPROACH: Climb to 5000 then climbing right turn to 6000 on CME VORTAC R-195 to CME VORTAC and hold, continue climb-in-hold to 6000.

6000 NoPT
CME 17 Arc

(IAF) JOGPO CME 17

R-308

IAF/LOM TOPAN 305 RO

I-ROW 7

CHISUM 116.1 CME Chan 108

R-278

098°

278°

4309

6000 067° (9.2)

3729

3824

LOCALIZER 109.9 I-ROW Chan 36

R-195

R-109

R-151

(IAF) IPNUC CME 17

5600 NoPT to FRAIZ

CME 17 Arc

5600 NoPT to WOKUM CME 17

(IAF) WOKUM CME 17

R-344

5100 215° (8.9)

5600

IR-044

IR-058

R-051

(IF) FRAIZ I-ROW 15.5

6000 251° (15.9)

ONSOM

116.3 CME

Chan 110

350°

170°

035°

MSA RO 25 NM

6400

5400


360°

081°

ELEV 3671	D	TDZE 3633
-----------	---	-----------

3752

215°

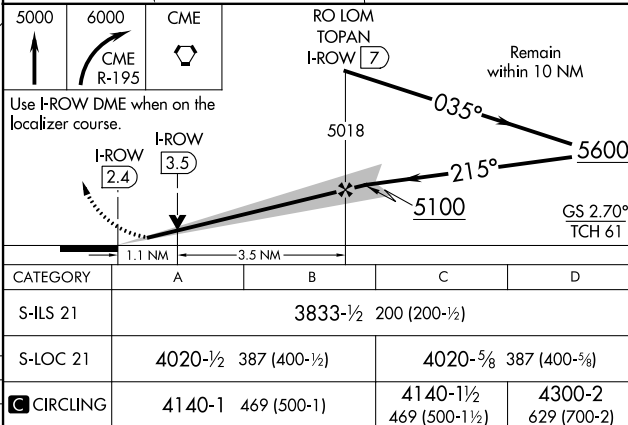

SW-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH 65702 W17A	APP CRS 170°	Rwy Idg 10008 TDZE 3666 Apt Elev 3671
--	------------------------	--



RNAV (GPS) RWY 17
ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3996 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4083 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct KIGDE and hold.

ATIS 128.45 306.2	ROSWELL APP CON★ 119.6 239.0	ROSWELL TOWER★ 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
----------------------	---------------------------------	--	------------------------	----------------------------	------------------

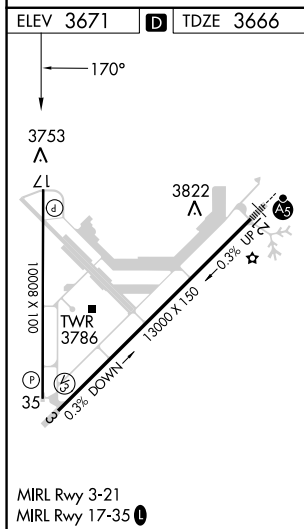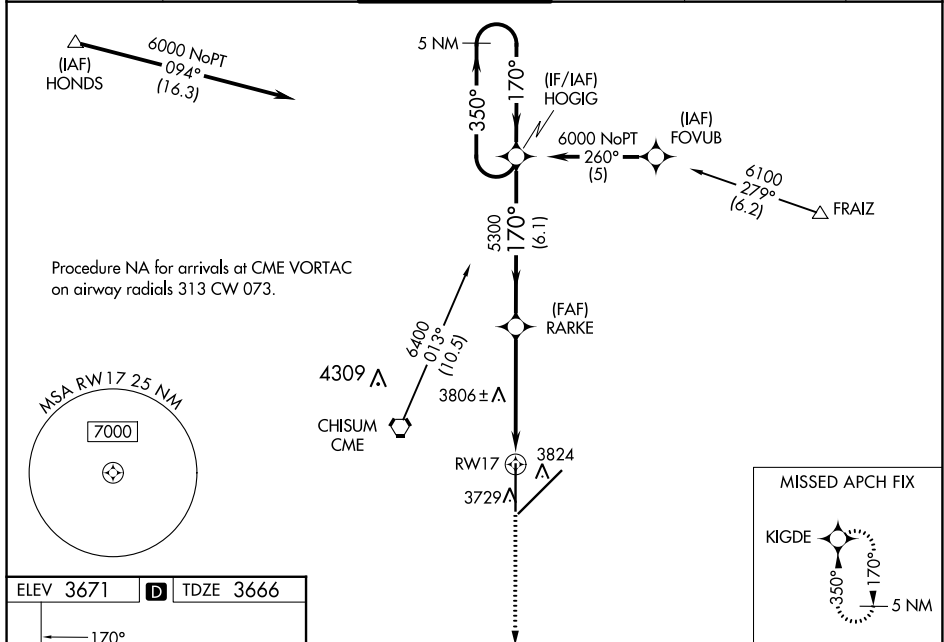

RARKE

5 NM Holding Pattern
6000
350°
170°
1.3 NM to RW17
RW17
1.3 NM
3.6 NM
6.1 NM
5300
GP 3.00°
TCH 50

CATEGORY	A	B	C	D
LPV DA	3916- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/VNAV DA	4003-1 ¹ / ₄ 337 (400-1 ¹ / ₄)			
LNAV MDA	4120-1	454 (500-1)	4120-1 ¹ / ₄ 454 (500-1 ¹ / ₄)	4120-1 ¹ / ₂ 454 (500-1 ¹ / ₂)
CIRCLING	4140-1 ¹ / ₄	469 (500-1 ¹ / ₄)	4140-1 ¹ / ₂ 469 (500-1 ¹ / ₂)	4300-2 629 (700-2)

SW-1, 22 FEB 2024 to 21 MAR 2024


SW-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH 69302 W21A	APP CRS 215°	Rwy Idg 13000 TDZE 3633 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 21

ROS WELL AIR CENTER (ROW)

RNP APCH-GPS.					MALSR 	MISSED APPROACH: Climb to 6300 direct GICEC and hold.	
▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3979 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 4075 feet and all visibilities 1/4 SM; increase all MDAs 80 feet and LNAV Cat C/D visibility 1/8 SM and Circling Cat D visibility 1/4 SM. Baro-VNAV and VDP NA when using Artesia altimeter setting. For inop ALS, increase LPV all Cats visibility to 3/8 SM, and LNAV/VNAV all Cats visibility to 1 SM. For inop ALS when using Artesia altimeter setting, increase LPV all Cats visibility to 1 SM and LNAV/VNAV all Cats visibility to 1 1/8 SM.							
ATIS		ROS WELL APP CON ★		ROS WELL TOWER ★	GND CON	CLNC DEL	UNICOM
128.45 306.2		119.6 239.0		118.5 (CTAF) 233.7	121.9 348.6	132.875 282.25	122.95

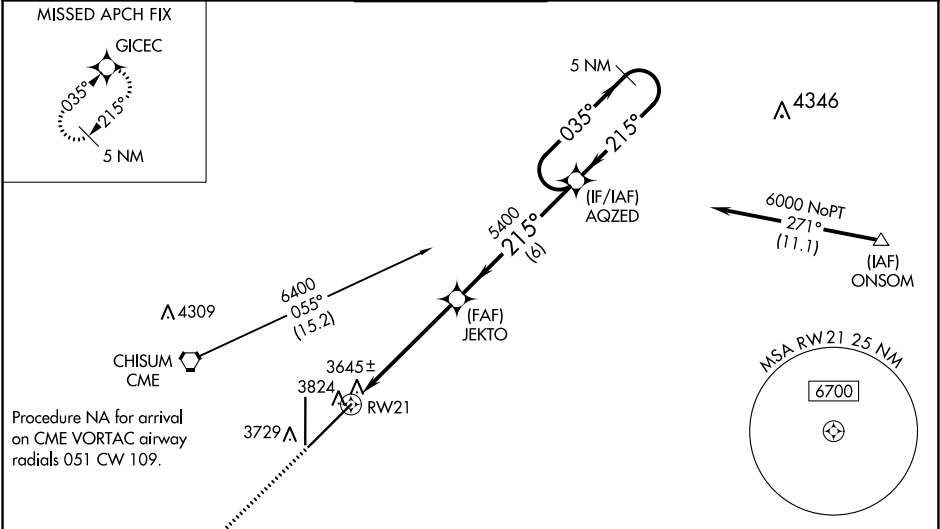

ELEV 3671		D TDZE 3633	
6300	GICEC		
CATEGORY		A	
LPV	DA	3899-1/2	266 (300-1/2)
LNAV/VNAV	DA	3995-5/8	362 (400-3/8)
LNAV	MDA	4080-1/2 447 (500-1/2)	4080-7/8 447 (500-7/8)
CIRCLING		4140-1 1/4 469 (500-1 1/4)	4140-1 1/2 469 (500-1 1/2) 4300-2 629 (700-2)

WAAS CH 70402 W35A	APP CRS 350°	Rwy Idg 10008 TDZE 3671 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 35

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

▼




▲

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 4001 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4033 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM, and Circling Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct HOGIG and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

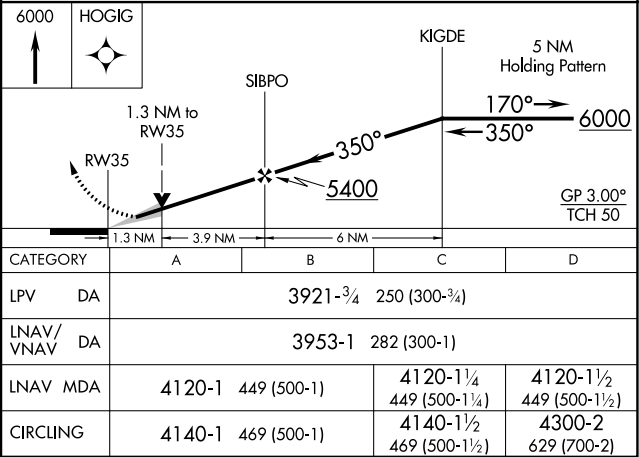
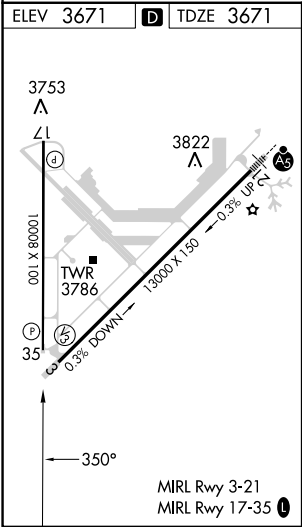
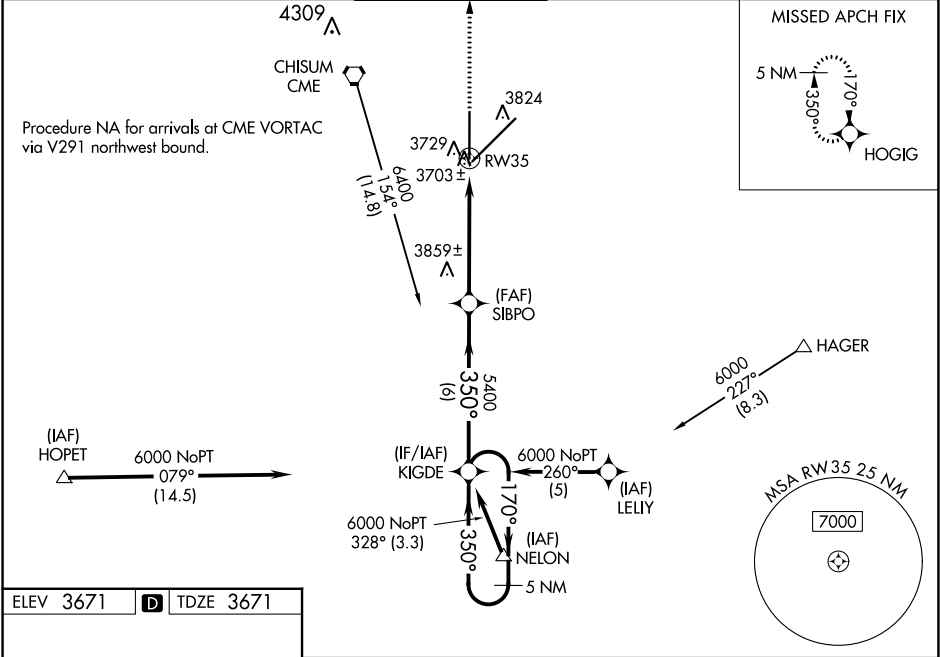


VORTAC CME	APP CRS	Rwy Idg	N/A
116.1	098°	TDZE	N/A
Chan 108		Apt Elev	3671

VOR-B

ROSWell AIR CENTER (ROW)

T ASR If local altimeter setting not received, procedure NA.		MISSED APPROACH: Climbing right turn to 6000 direct CME VORTAC and hold.			
ATIS	ROSWell APP CON *	ROSWell TOWER *	GND CON	CLNC DEL	UNICOM
128.45 306.2	119.6 239.0	118.5 (CTAF) 233.7	121.9 348.6	132.875 282.25	122.95

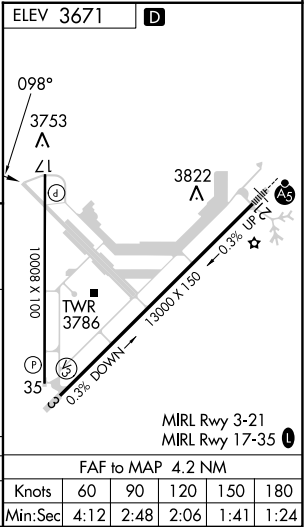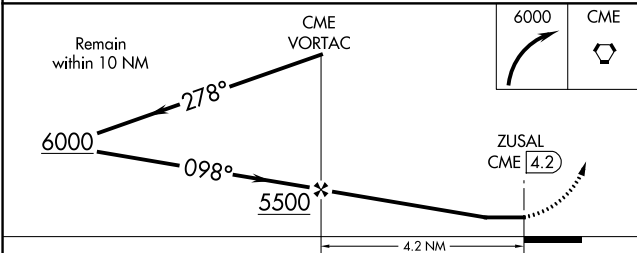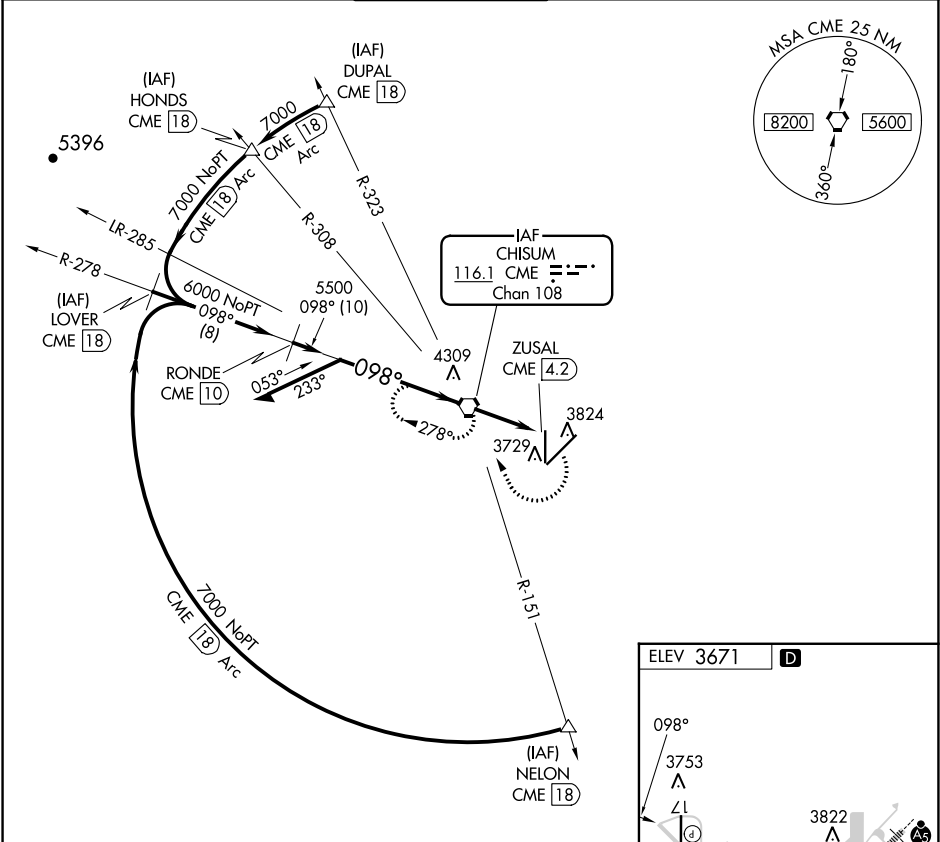

CATEGORY	A	B	C	D	FAF to MAP 4.2 NM					
CIRCLING	4140-1	469 (500-1)	4140-1½ 469 (500-1½)	4300-2 629 (700-2)	Knots	60	90	120	150	180
					Min:Sec	4:12	2:48	2:06	1:41	1:24