




LOC I-RPD	APP CRS	Rwy Idg	6500
108.3	010°	TDZE	1102
		Apt Elev	1109

ILS or LOC RWY 1

RICE LAKE RGNL/CARL'S FLD (RPD)

ADF required. From RZN DME: RNAV 1-GPS required.	MALSR	MISSED APPROACH: Climb to 2200 then climbing right turn to 3200 direct WICKR LOM and hold.
Circling Rwy 13, 31 NA at night.		

AWOS-3	MINNEAPOLIS CENTER	UNICOM
120.525	125.3 335.6	122.7 (CTAF) 0

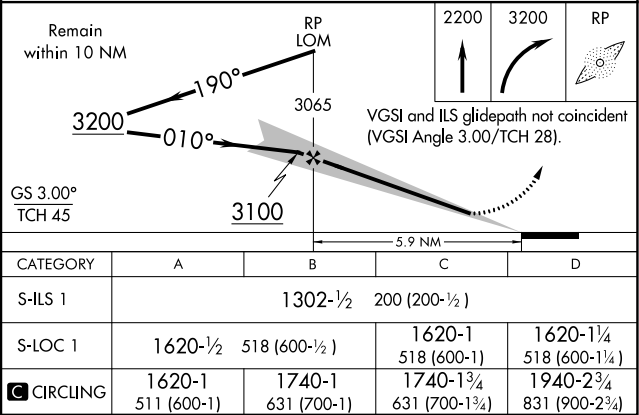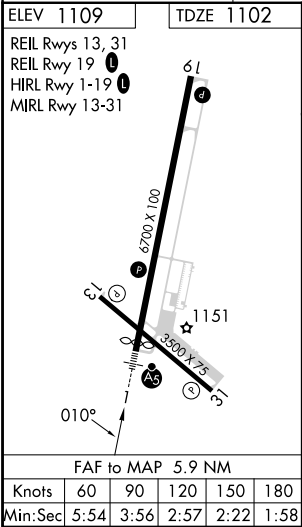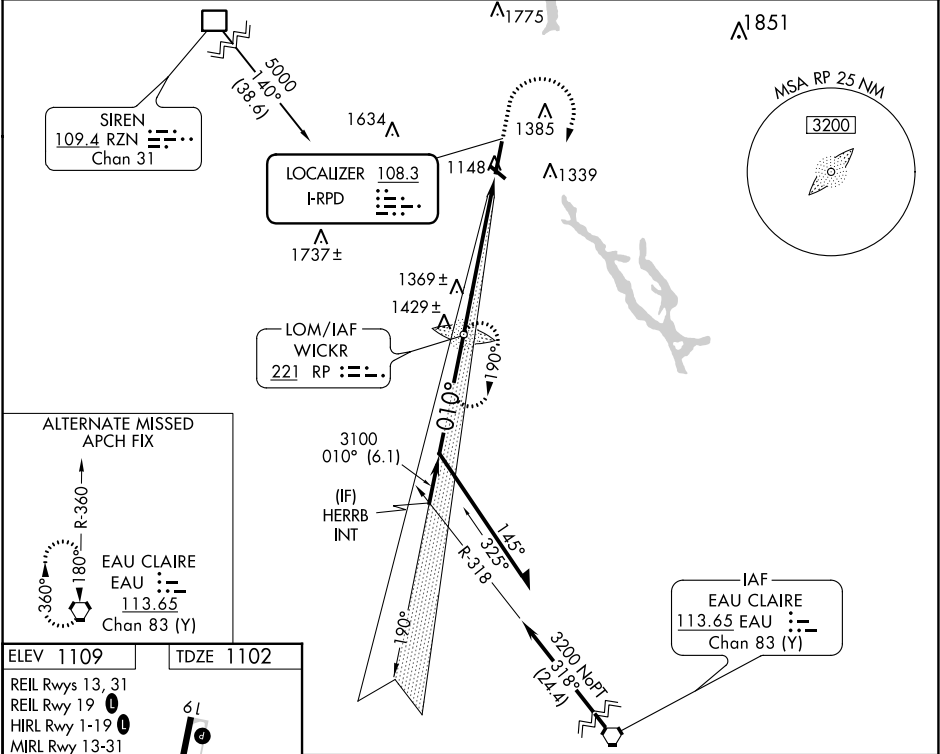

EC-3, 22 FEB 2024 to 21 MAR 2024

EC-3, 22 FEB 2024 to 21 MAR 2024


WAAS CH 86217 W01A	APP CRS 010°	Rwy Idg 6500 TDZE 1101 Apt Elev 1109
--	------------------------	---

RNAV (GPS) RWY 1

RICE LAKE RGNL/CARL'S FLD (RPD)

	If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all DAs/MDAs 120 feet. DME/DME RNP-0.3 NA. Baro-VNAV NA below -17°C (3°F). Baro VNAV and VDP NA when using Chippewa Valley Rgnl altimeter setting. For inoperative MALS, increase LPV visibility to 1, and LNAV Cat D visibility to 1¼. Circling Rwy 13, 31 NA at night.			MISSED APPROACH: Climb to 3200 direct ORBEW and hold.
--	--	--	--	---

AWOS-3 120.525	MINNEAPOLIS CENTER 125.3 335.6	UNICOM 122.7(CTAF)0
--------------------------	--	-------------------------------

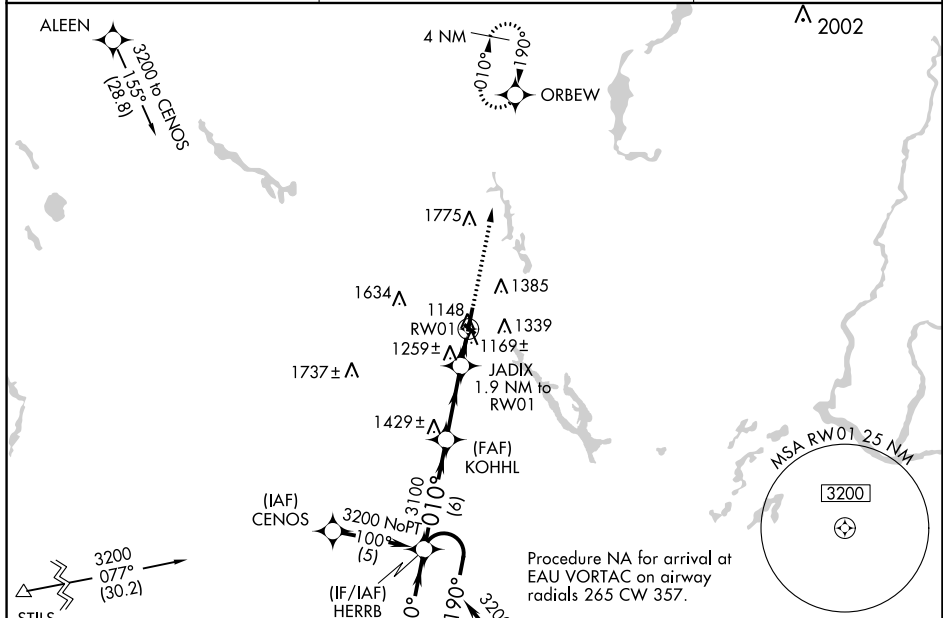

CATEGORY	A	B	C	D
LPV DA		1390-1/2	289 (300-1/2)	
RNAV/ VNAV		1440-3/4	339 (400-3/4)	
RNAV MDA	1520-1/2	419 (500-1/2)	1520-3/4	1520-1
			419 (500-3/4)	419 (500-1)
C CIRCLING	1600-1 1/4	1740-1 1/4	1740-1 3/4	1940-2 3/4
	493 (500-1 1/4)	631 (700-1 1/4)	631 (700-1 3/4)	831 (900-2 3/4)

