

LOC I-RUQ 109.95	APP CRS 202°	Rwy Idg TDZE Apt Elev 5501 772 772
----------------------------	------------------------	--

ILS or LOC RWY 20

MID-CAROLINA RGNL (RUQ)

ADF required. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase S-LOC Cats C/D visibility 1/8 SM and Circling Cat D visibility 1/4 SM. For inop ALS when using Lexington altimeter setting, increase S-LOC 20 Cats C and D visibility to 1 3/4 mile.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 2900 direct ROVDY LOM and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF) 1
--------------------------	---	---------------------------	-----------------------------------

ADF REQUIRED

Barretts Mountain 113.75 BZM Chan 84(Y)

Greensboro 116.2 GSO Chan 109

Azell Int GSO 17

Moped Clt 22.9

Altitudes: 2323, 1730, 1848, 1060, 988±, 1121, 822, 1051, 964, 1453, 11060

Bearings: 022°, 131°, 137°, 022°, 051°, 231°

LOCATOR 109.95 I-RUQ

LOM/IAF ROVDY 275 RU

ALTERNATE MISSED APCH FIX: Azell Int GSO 17, 116.2 GSO R-231 Chan 109, 113.0 LIB R-278 Chan 77

MSA RU 25 NM 3400

ELEV 772	TDZE 772
FAF to MAP 5 NM	
Knots	60 90 120 150 180
Min:Sec	5:00 3:20 2:30 2:00 1:40
CATEGORY A B C D	
S-ILS 20 972-1/2 200 (200-1/2)	
S-LOC 20 1360-1/2 588 (600-1/2) 1360-1/4 588 (600-1/4)	
CIRCLING 1360-1 588 (600-1) 1440-1 3/4 668 (700-1 3/4) 1440-2 668 (700-2)	

SALISBURY, NORTH CAROLINA
Amdt 1C 27FEB20

35°39'N-80°31'W

MID-CAROLINA RGNL (RUQ)
ILS or LOC RWY 20

LOM RU	APP CRS	Rwy Idg	5501
275	202°	TDZE	772
		Apt Elev	772



NDB RWY 20
MID-CAROLINA RGNL (RUQ)

When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 40 feet, increase S-20 Cats C and D, and Circling Cat C visibility ½ SM and Circling Cat D ¼ SM. For inop ALS, increase Cat D visibility to 1 7⁄8 SM. For inop ALS when using Lexington altimeter setting increase Cat D visibility to 2 SM.



MISSED APPROACH: Climb to 1800 then climbing right turn to 2500 direct ROVDY LOM and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF) 0
-------------------	------------------------------------	--------------------	----------------------------

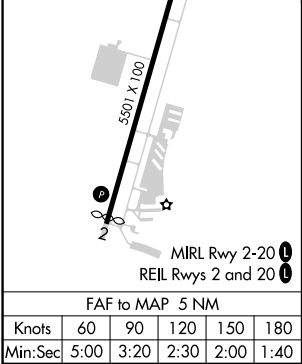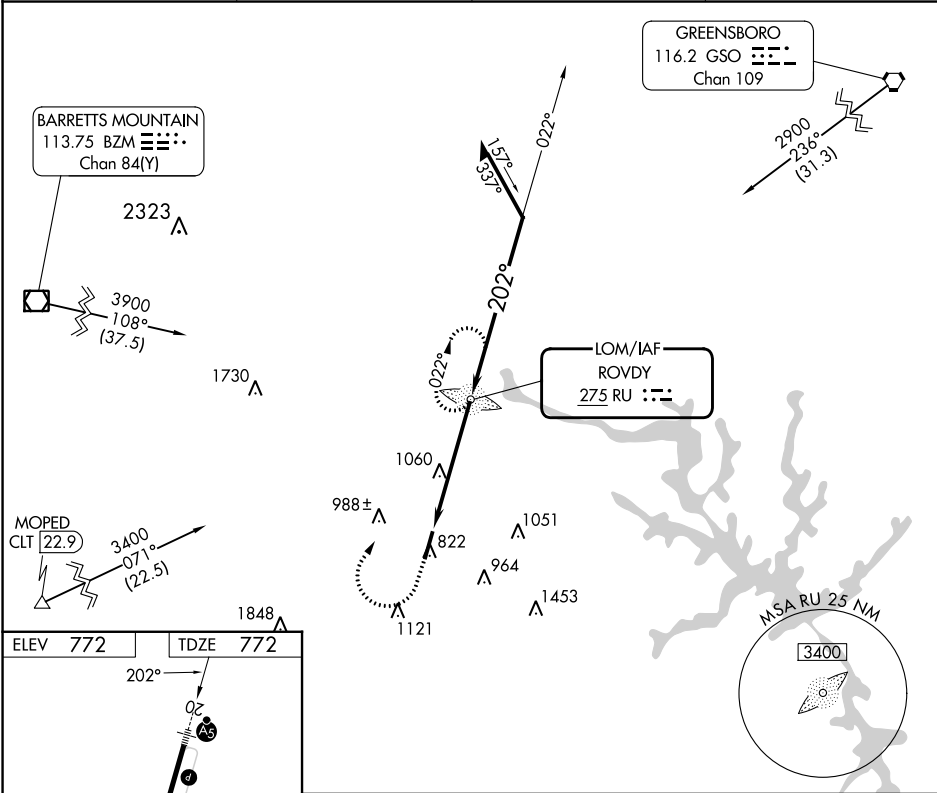

1800	2500	RU	ROVDY RU LOM	6000	022°	Remain within 10 NM
				2500	202°	
				3.20° TCH 39		
				5 NM		
CATEGORY	A	B	C	D		
S-20	1420-3⁄4 648 (700-3⁄4)		1420-1 3⁄8 648 (700-1 3⁄8)			
CIRCLING	1420-1 648 (700-1)		1440-1 7⁄8 668 (700-1 7⁄8)	1440-2 668 (700-2)		



RNP APCH.

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C.
Rwy 2 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3100 direct COLID
and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF) 0
-------------------	------------------------------------	--------------------	----------------------------

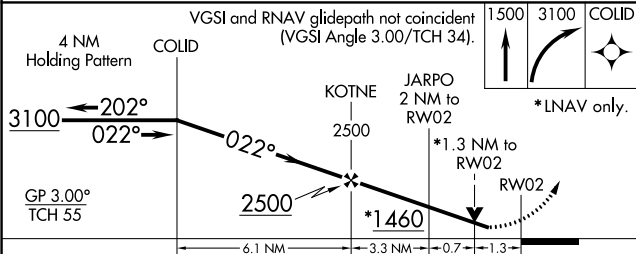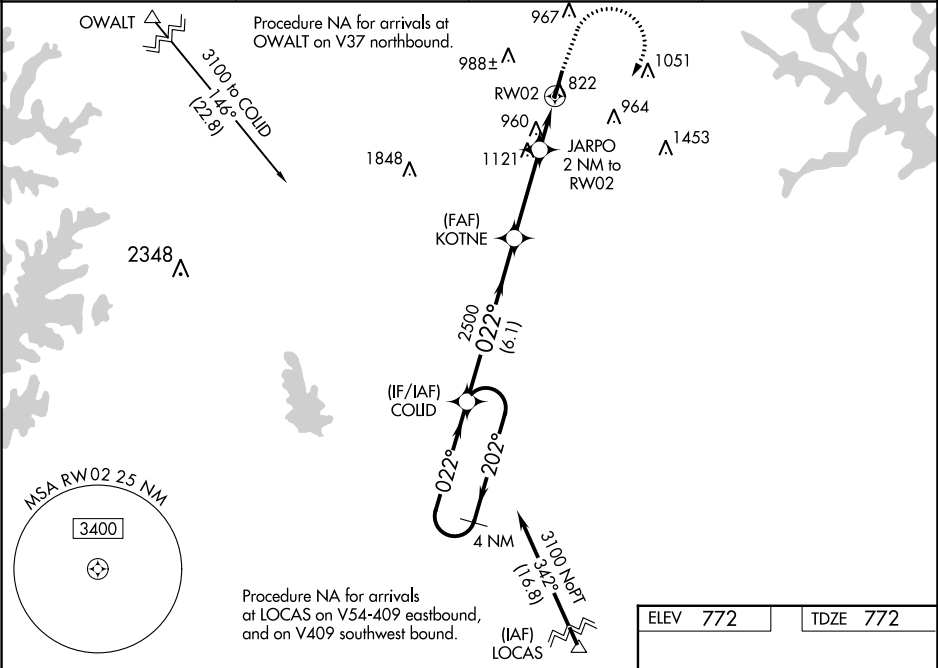

CATEGORY	A	B	C	D
LPV DA	1138-1	366 (400-1)		
LNAV/VNAV DA	1181-1½	409 (500-1½)		
LNAV MDA	1220-1	448 (500-1)	1220-1¾	448 (500-1¾)
CIRCLING	1220-1 448 (500-1)	1260-1 488 (500-1)	1440-1¾ 668 (700-1¾)	1440-2 668 (700-2)


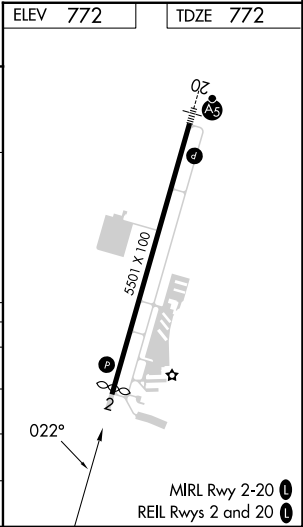


WAAS CH 42521 W20A	APP CRS 202°	Rwy Idg TDZE 772 Apt Elev 772
--	------------------------	---

RNAV (GPS) RWY 20
MID-CAROLINA RGNL (RUQ)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LNAV Cat C and D visibility ½ SM and Circling Cat C visibility ½ SM and Circling Cat D ¼ SM. For inop ALS when using Lexington altimeter setting, increase LNAV Cat C and D visibility to 1¾ SM. VDP and Baro-VNAV NA when using Lexington altimeter setting. For inop ALS, increase LNAV/VNAV visibility to ¾ SM all Cats.	MALSR 	MISSED APPROACH: Climb to 2100 then climbing right turn to 3400 direct YIDPO and hold.
--	--	---

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF) 1
--------------------------	---	---------------------------	--

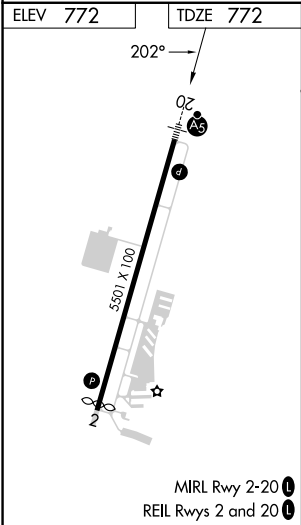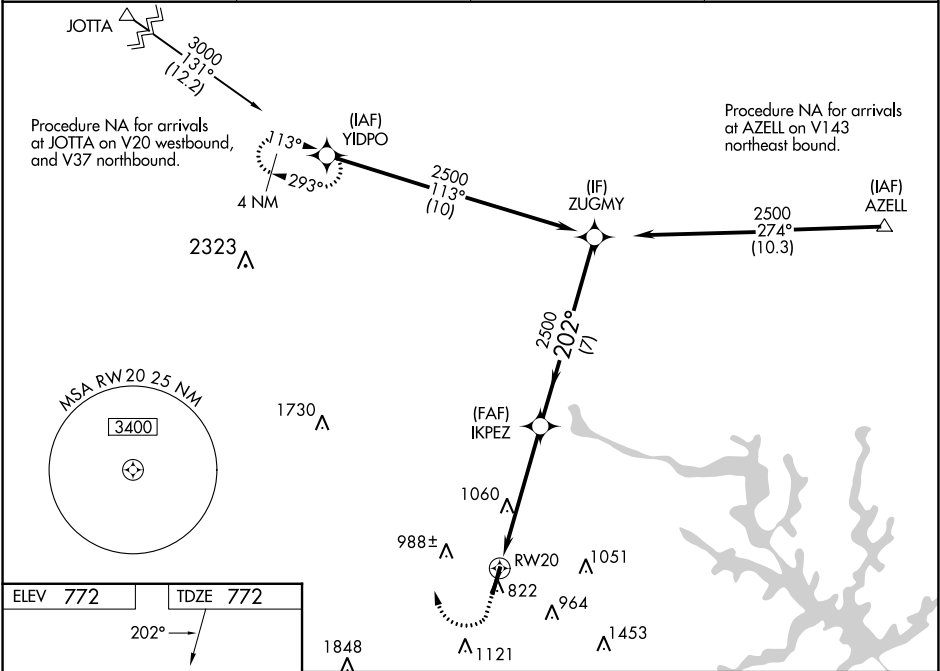

ELEV 772	TDZE 772
2100	3400
YIDPO	
*LNAV only.	
*1.7 NM to RW20	
RW20	
IKPEZ 2500	
ZUGMY 2500	
GP 3.00° TCH 46	
1.7 NM 3.6 NM 7 NM	
CATEGORY	A B C D
LPV DA	972-1½ 200 (200-½)
LNAV/VNAV DA	1032-½ 260 (300-½)
LNAV MDA	1360-½ 588 (600-½) 1360-1¼ 588 (600-1¼)
CIRCLING	1360-1 588 (600-1) 1440-1¾ 668 (700-1¾) 1440-2 668 (700-2)