

HI-ILS or LOC/DME Z RWY 16

AL-371 [USAF]

KELLY FLD (KSKF)

LOC 1-1-SKF 110.1	APCH CRS 158°	Rwy Idg TDZE Appt Elev	11,550 690 690
----------------------	------------------	------------------------------	----------------------



ALSF-1
A1

MISSED APPROACH: Climb to 2500' w/ KSY R-1-63 until 4 DME, then continue climb to 3000 to FTER/1.5 DME and hold.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5
----------------------	-------------------------------------

KELLY TOWER 124.3 322.35


GND CON 121.8 289.4

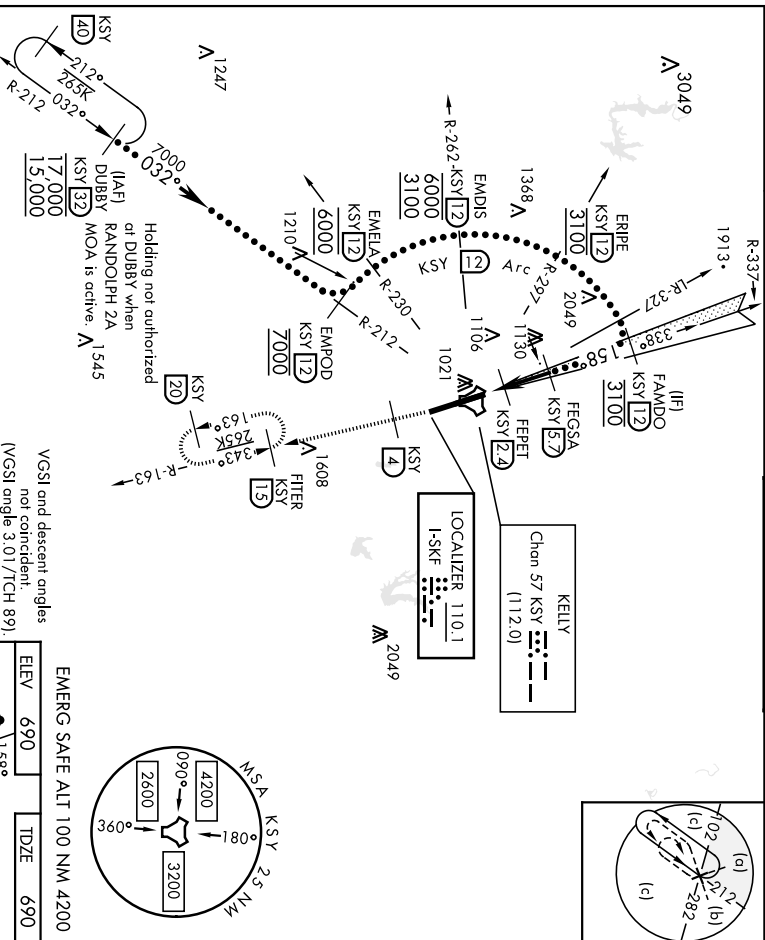

EMERG SAFE ALT 100 NM 4200

VGSI and descent angles
not coincident.
[VGSI angle 3.01/TCH 89]

CATEGORY	C	D	E
S-ILS 1*	890/24	200	[200-1/2]
S-LOC/**	1080/35	390	[400-5/6]
DME 1*	1340-134	1400-214	1900-3
DME 16	650 (700-134)	710 (800-214)	1210 (1300-3)
CIRCLING	650	710	1210

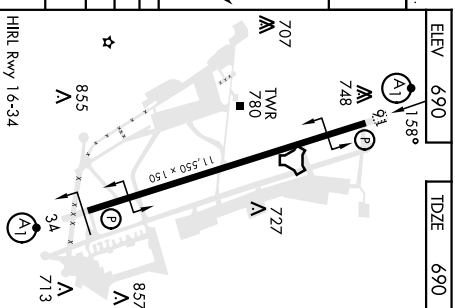

SAN ANTONIO, TEXAS

29°33'N-98°35'W


KELLY FLD (KSKF)

Amdt 2 29DEC22

HI-ILS or LOC/DME Z RWY 16

HI-ILS or LOC/DME Z RWY 34

KELLY FLD (KSKF)

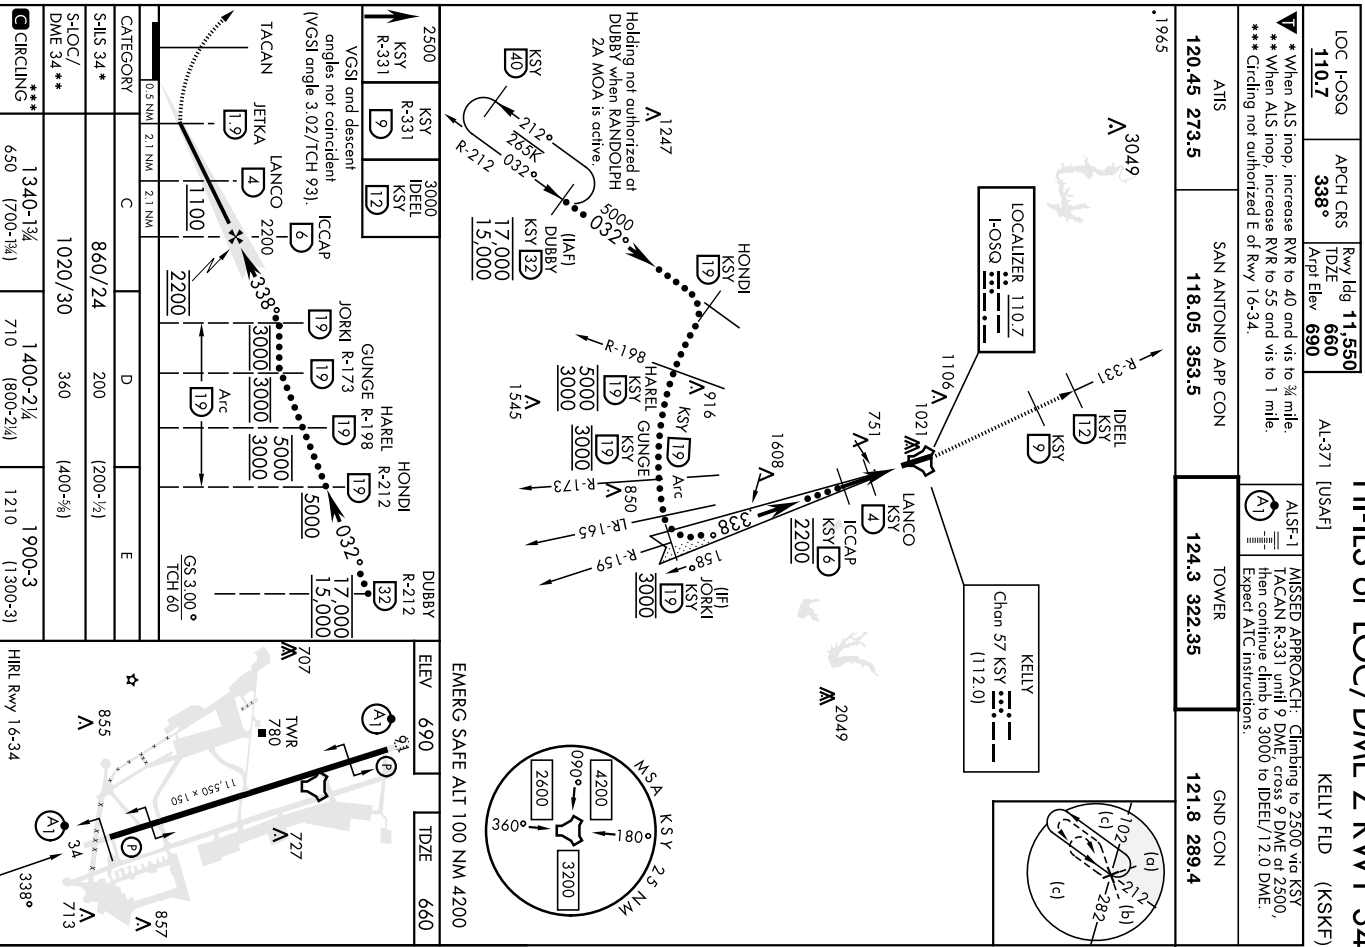

HI-ILS or LOC/DME Z RWY 34




HI-TACAN Z RWY 34

TACAN KSY Chom 57	APCH CRS 343°	Rwy Idg 11,550 TDZE 660 Aprt Elev 690	AL-371 [USAF]	KELLY FLD (KSKF)
----------------------	------------------	---	---------------	------------------

ALSF-1


MISSED APPROACH: Climb to 2500 via KSY TACAN R-331 until 9 DME, cross 9 DME at 2500, then continue climb to 3100 to IDEEL/12 DME. Expect ATC instructions.

ATIS	SAN ANTONIO APP CON	TOWER	GND CON
120.45 273.5	118.05 353.5	124.3 322.35	121.8 289.4

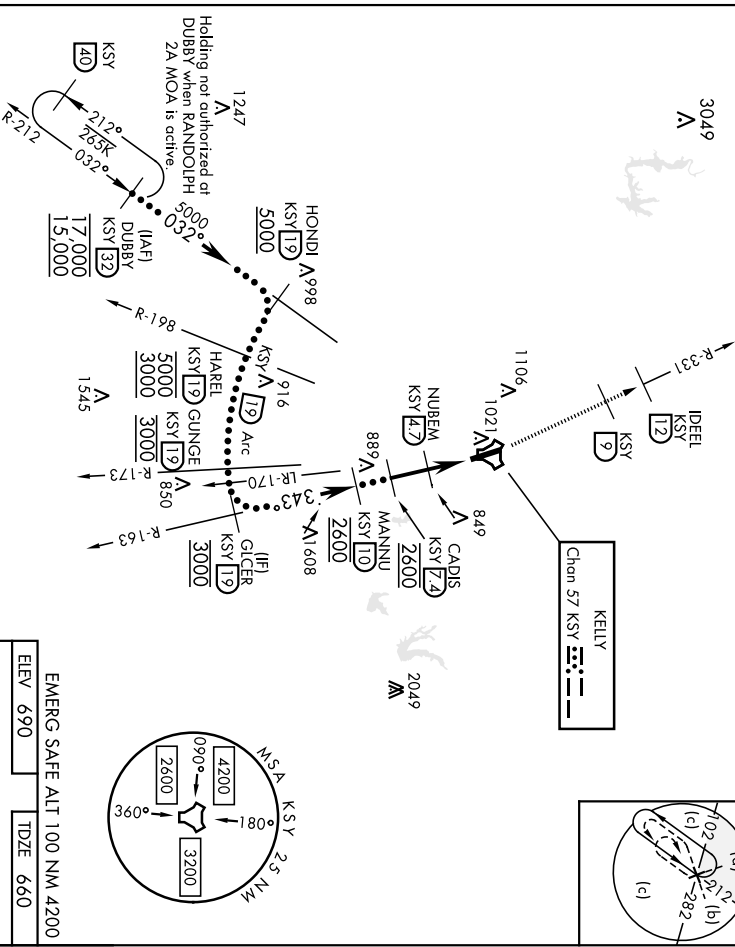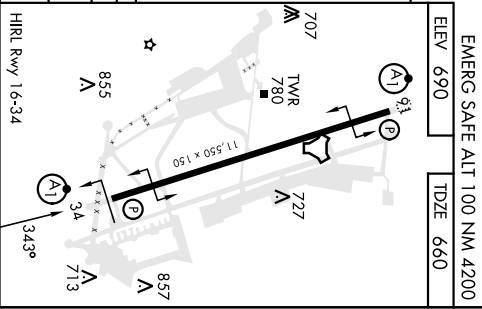[illegible]

KELLY FLD (KSKE)

ALST-1
MISSED APPROACH: Climb to 2500, vno KSYR 8-163 until 4 DME, then continue climb to 3000 to FTER/15 DME and hold. Non-TACAN equipped aircraft expect alternate missed approach instructions.

EMERG SAFE ALT 100 NM 4200

29°23'N-98°35'W


KELLY FLD (KSKF)

ILS or LOC/DME Y RWY 16

ILS or LOC/DME Y Rwy 34

LOC HOQO 110.7	APCH CRS 338°	Rwy, ldg TDLE 660 Aptl Elev 690	AL-371 [USAF]	KELLY FID (KSKF)
▼ When AIS inop, increase RVR to 40 and vis to $\frac{1}{2}$ mile. *** When AIS inop, increase RVR to 55 and vis to 1 mile. *** Circling not authorized E of Rwy 16-34.			ⓐ ⓐ MISSED APPROACH: Climb to 2500 via KSY TACAN R-331 until 9 DME, cross 9 DME at 2500, then continue climb to 3000 to IDEEL 12 DME. Exped ATC instructions.	
AITS 120.45 273.5		SAN ANTONIO APP CON 118.05 353.5		TOWER 124.3 322.35
		GND CON 121.8 289.4		

† Non-TACAN equipped aircraft expect alternate missed approach instructions.

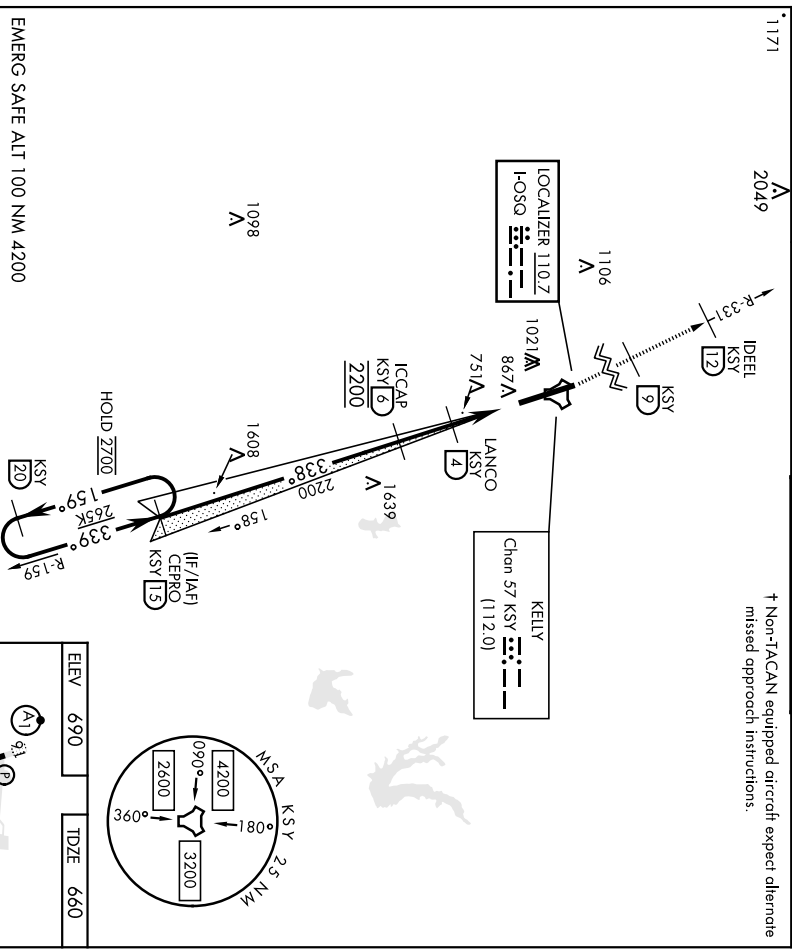

SAN ANTONIO, TEXAS

29°23'N-98°35'W

KELLY FLD (KSKF)

Amdt 2 29DEC22

ILS or LOC/DME Y Rwy 34

SAN ANTONIO, TEXAS

WAAS CH 52296 W16A	APCH CRS 158°	Rwy ldg TDZE Arpt Elev	11,550 690 690
--------------------------	------------------	------------------------------	----------------------

AL-371 (USAF)

KELLY FLD (KSKF)

RNP APCH

▲ * When ALS inop, increase RVR to 40, vis to 3/4 miles.
** When ALS inop, increase RVR to 60, vis to 1 1/8 miles.

ALSF-1



MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct FITER and hold.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
----------------------	-------------------------------------	-----------------------------	------------------------

*** When ALS inop, increase CAT AB RVR to 55, and vis to 1 mile; CAT CDE vis to 1 7/8 miles.

**** Circling not authorized E of Rwy 16-34.

1985

REUBE

▲ 1953

(IAF) SODEE
3100

For uncompensated
BARO-VNAV systems,
LNAV/VNAV NA below -16°C
(3°F) or above 54°C (129°F).



4100
098°
(9.6)

(IAF) WURON
4100

2042

▲ 1696

3100

097°

(4.5)

ODUYU

3000

(4.5)

2049

▲ 1584

3000

158°

(1.6)

(IF/IAF) FAMDO
3000

1804

▲ 1584

3000

158°

(1.6)

(FAF) ZILEN

908

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

▲ 1106

857

RW16

857

MSA RW16 25 NM

4200



EMERG SAFE ALT 100 NM 4200

FAMDO

VGSI and descent angles
not coincident (VGSI
Angle 3.01/TCH 89).

1500

3000

FITER

ELEV 690

TDZE 690

3000

158°

ZILEN

2400

1.8 NM to RW16


RW16

GP 3.00°

TCH 57

5.1 NM

CATEGORY	A	B	C	D	E
LPV DA*	890/24	200	(200-½)		
LNAV/VNAV DA**	1080/35	390	(400-¾)		
LNAV MDA***	1360/24 670 (700-½)	1360-1½ 670 (700-1½)			
■ CIRCLING****	1360-1 670 (700-1)	1360-1½ 670 (700-1½)	1400-2¼ 710 (800-2¼)	1900-3 1210 (1300-3)	

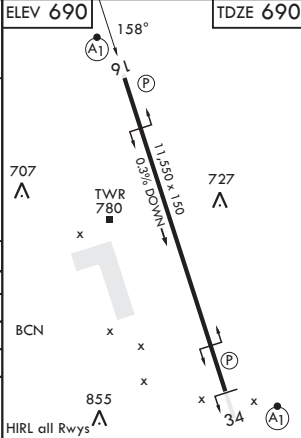

SAN ANTONIO, TEXAS

29°23'N - 98°35'W

KELLY FLD (KSKF)

Amdt 2 23FEB23

RNAV (GPS) RWY 16

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 65364 W34A	APCH CRS 338°	Rwy ldg TDZE Arprt Elev	11,550 660 690
--	-------------------------	-------------------------------	---

AL-371 (USAF)

KELLY FLD (KSKF)

RNP APCH



▼ * When ALS inop, increase RVR to 40, vis to 3/4 miles.
** When ALS inop, increase vis to 1 3/8 miles.

ALSF-1



MISSED APPROACH: Climb to 3000 direct MONST. Expect ATC instructions.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
-----------------------------	--	------------------------------------	-------------------------------

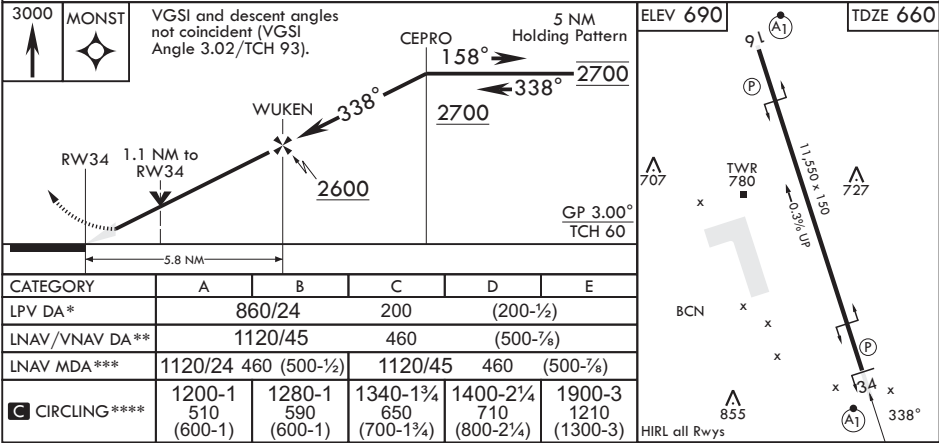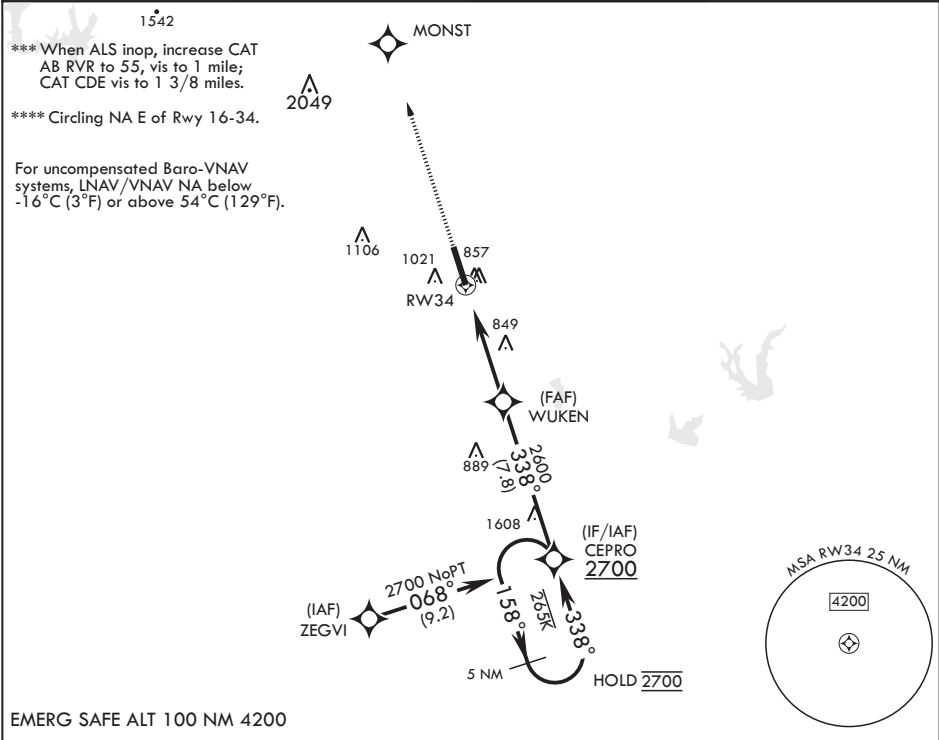

TACAN Y RWY 16


AL-371 [USAF]

KELLY FLD (KSKF)

TACAN KSY	APCH CRS	Rwy Idg	TDZE	TDZE Elev	AL-371 [USAF]	MISSED APPROACH: Climb on 2500 via KSY R-163 until 4 DME, then climb to 3000 to FITER/ 15 DME and hold.	KELLY FLD (KSKF)
Chon 57	151°	Appl Elev 690	690	690	A1		
* When ALS Inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE RVR to 60 and vis to 1½ miles. ** Circling not authorized E of Rwy 16-34.							

ATIS	SAN ANTONIO APP CON	TOWER	GND CON
120.45 273.5	118.05 353.5	124.3 322.35	121.8 289.4

• 1739

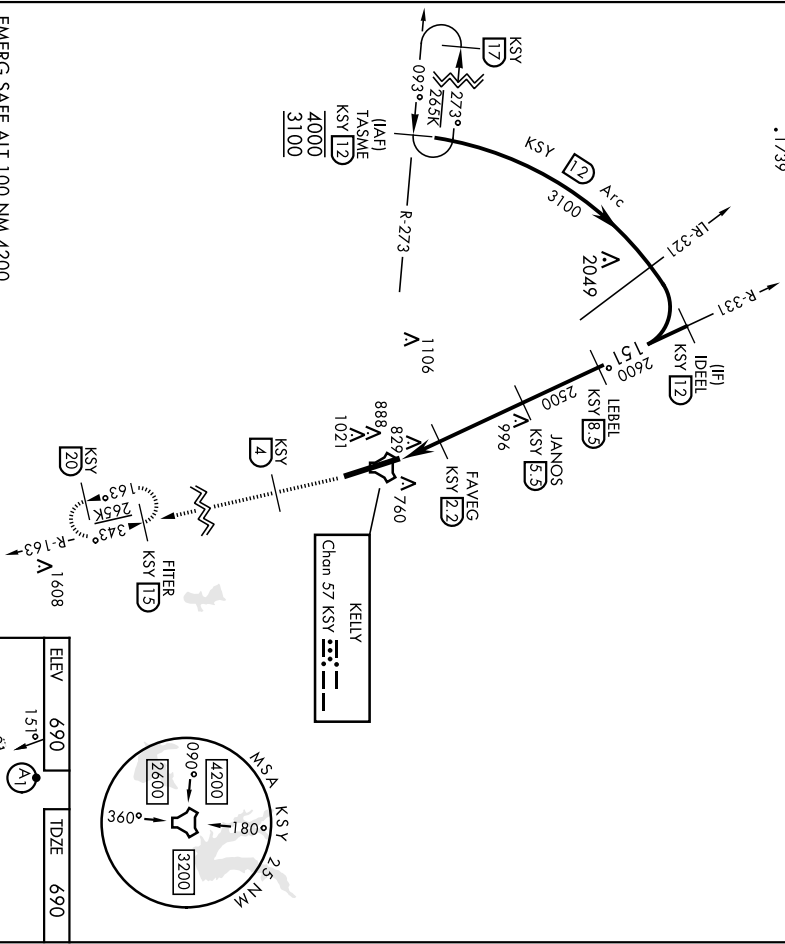

EMERG SAFE ALT 100 NM 4200					
IDEEL [12]	VCSL and descent angles not coincident (VCSL angle 3.01/TCH 89).			2500 KSY R-163	3000 KSY FITER KSY [15]
LEBEL [83]	JANOS [53]	FAVEG [22]	FAVLA [1] [1]	TACAN	
3100 151°	2600	2500	1360		
3.45° TCH 57 3.3 NM 1.2 NM 0.5 NM					
CATEGORY	A	B	C	D	E
S-16 *	1100/24 410 (500-½)		1100/40 410 (500-¾)		
CIRCLING **	1200-1 1280-1	1340-1¾ 1400-2¼	1900-3		
	510 (600-1) 590 (600-1)	650 (700-1¾) 710 (800-2¼)	1210(1300-3)		

707
A

780
TWR
A

727
A

857
A

713
A

855
A

34
A1

11.50 x 1.50

151°

91

1608
R-163
A

690
ELEV

690
TDZE

HRR Rwy 16-34


SAN ANTONIO, TEXAS

29° 23' N 98° 35' W

Amch 2 23FEB23

TACAN Y RWY 16

KELLY FLD (KSKF)

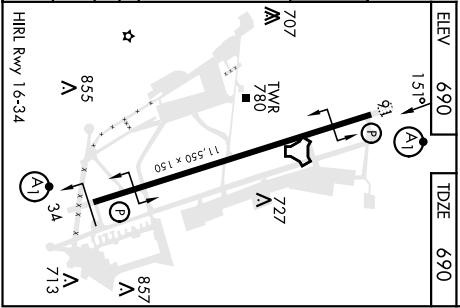

TACAN Y RWY 34

KELLY FLD (KSKF)

AL-371 (USAF)

