RNAV (GPS) RWY 21

SANTA MONICA MUNI (SMO)

WAAS	APP CRS	Rwy ldg	3500
CH 90339	213°	TDZE	170
W21A		Apt Elev	170

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 14°C (58°F). Rwy 21 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 5000 direct CAPOB and on track 283° to SADDE and hold, continue climb-in-hold to 5000.

ATIS	SOCAL APP CON	SANTA MONICA TOWER★	GND CON	UNICOM
119.15	135.05 317.5	120.1 (CTAF) L 257.8	121.9	122.95

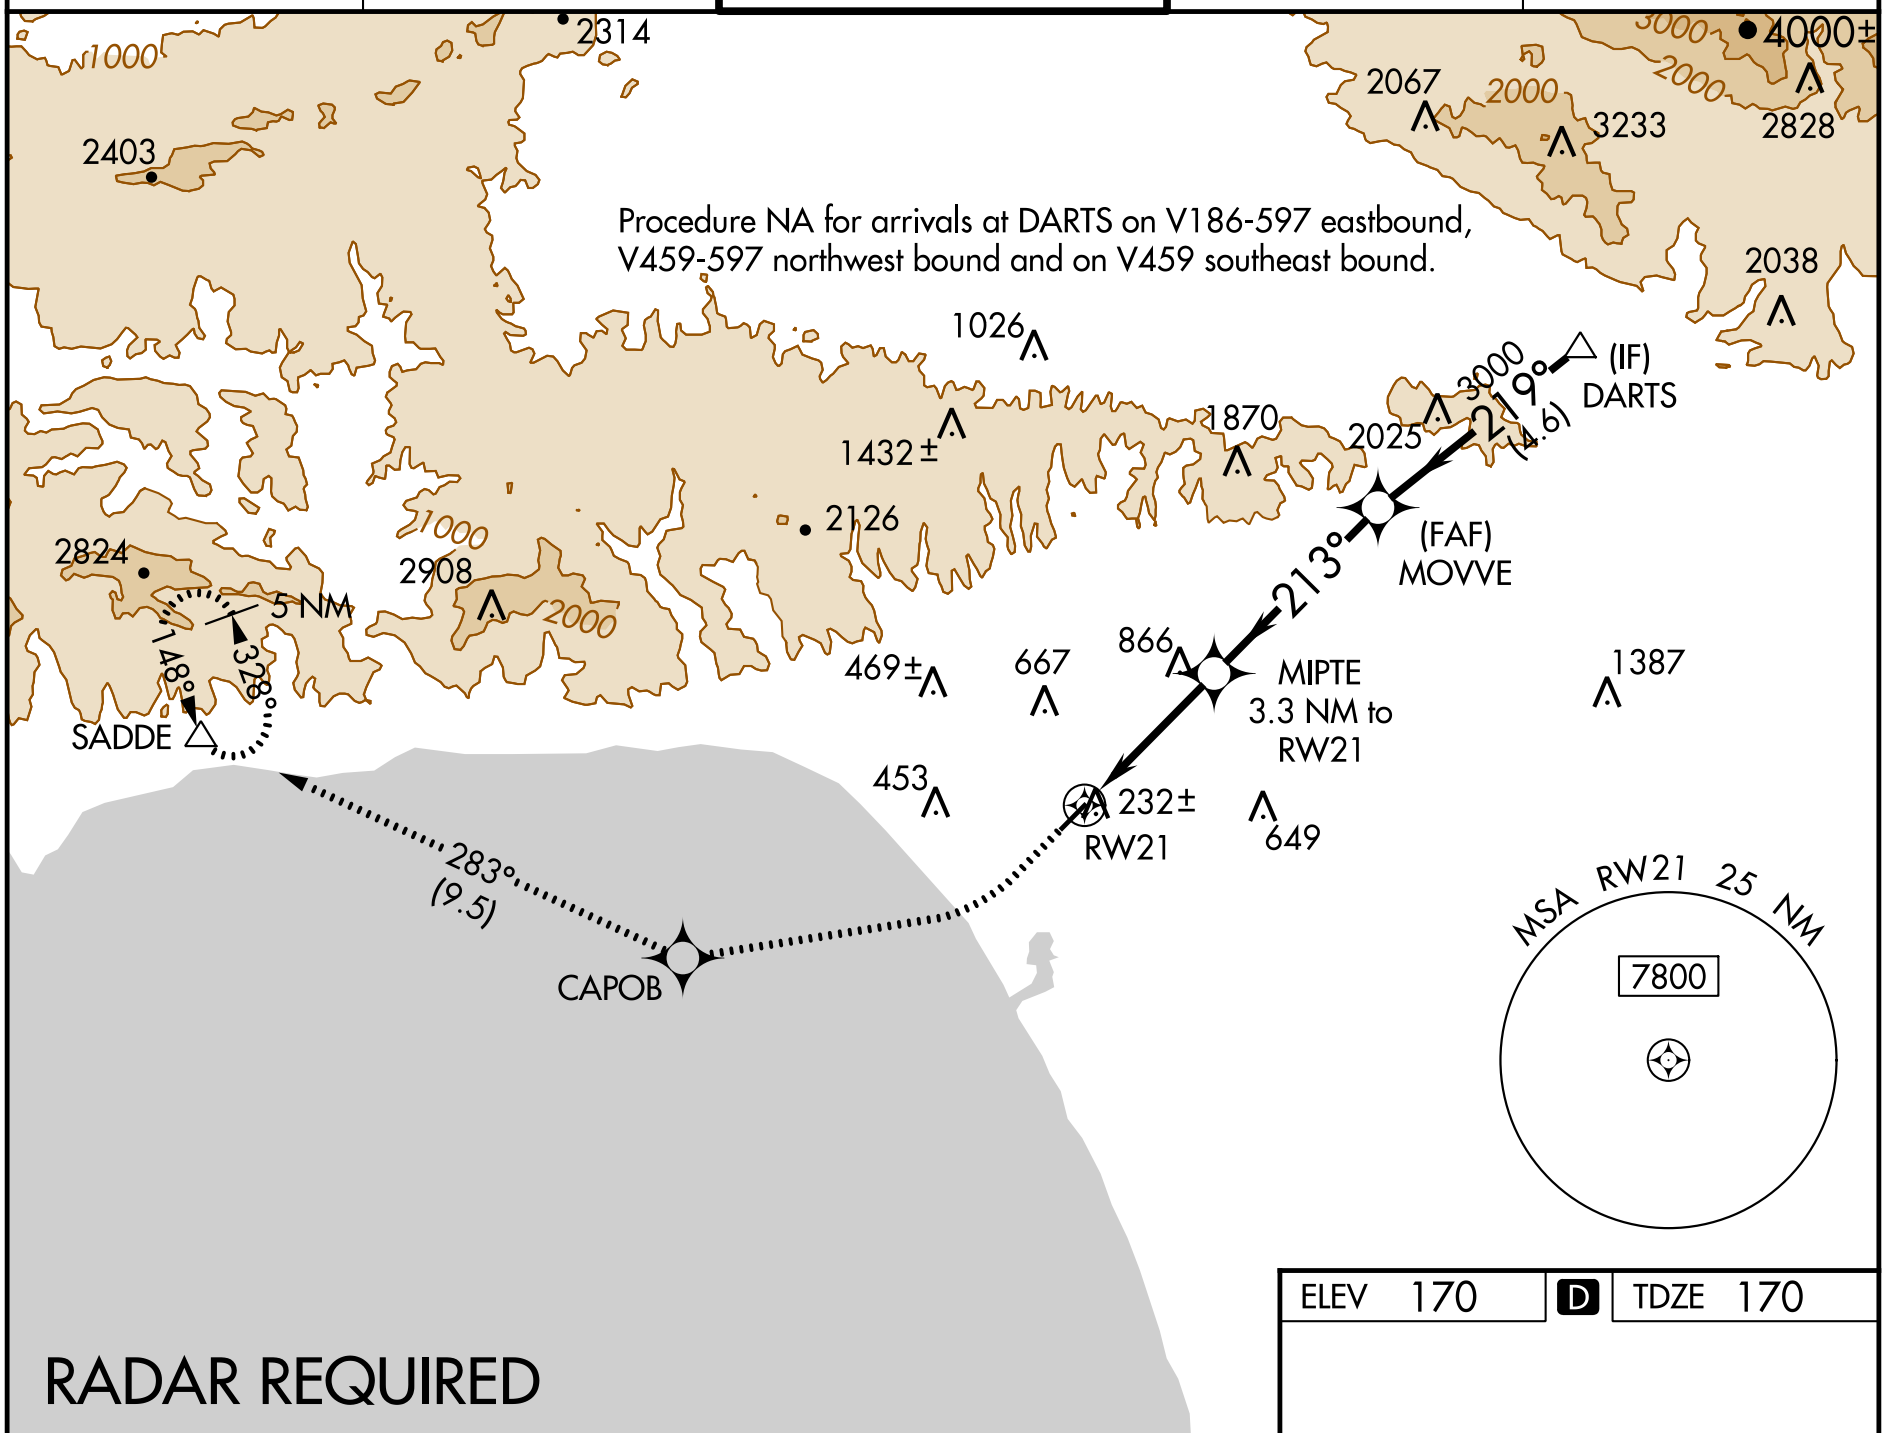

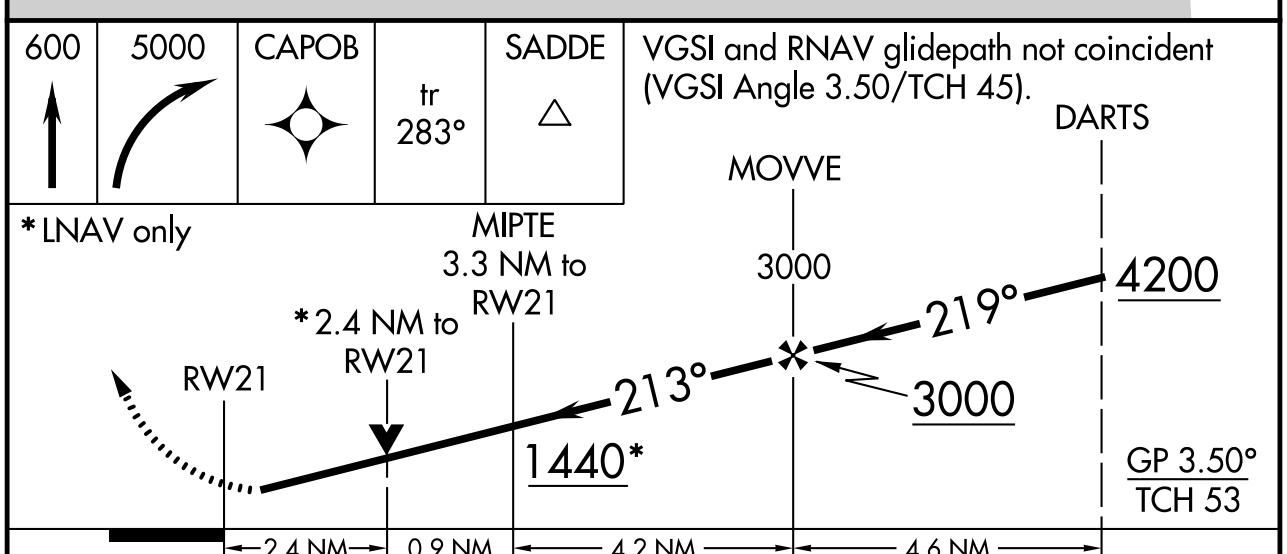

*LNAV only

CATEGORY	A	B	C	D
LPV DA	440-1 270 (300-1)			
LNAV/VNAV DA	685-1⅜ 515 (600-1⅜)			
LNAV MDA	1120-1¼ 950 (1000-1¼)		1120-2½ 950 (1000-2½)	

ELEV 170 | D | TDZE 170

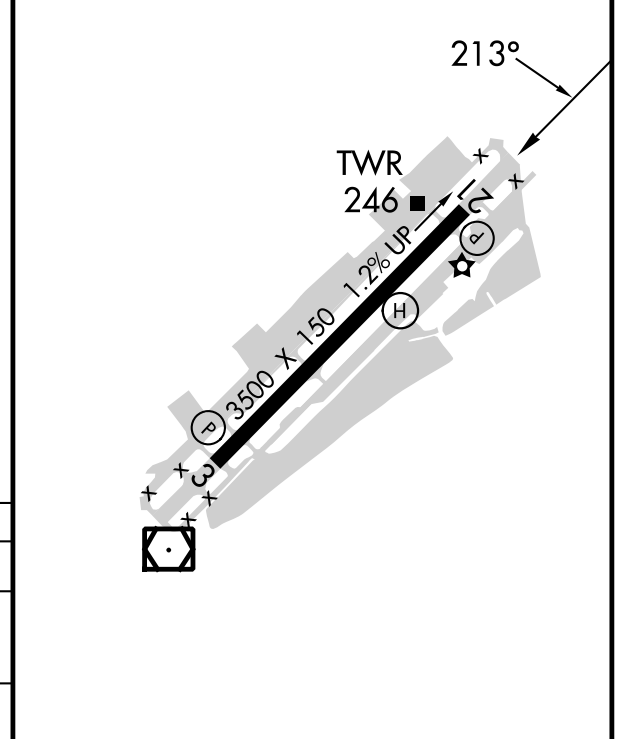

MIRL Rwy 3-21 L
REIL Rwy 21 L

SW-3, 22 FEB 2024 to 21 MAR 2024

SW-3, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) Y RWY 3
SANTA MONICA MUNI (SMO)

WAAS CH 50339 W03A	APP CRS 051°	Rwy ldg 3500 TDZE 164 Apt Elev 170

RNP APCH.

Rwy 3 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 600 then climbing left turn to 5500 direct NATJU and track 311° to JAASK and track 266° to SESPE and hold.
* Missed approach requires minimum climb of 300 feet per NM to 2400.

ATIS	SOCAL APP CON	SANTA MONICA TOWER ★	GND CON	UNICOM
119.15	135.05 317.5	120.1 (CTAF) L 257.8	121.9	122.95

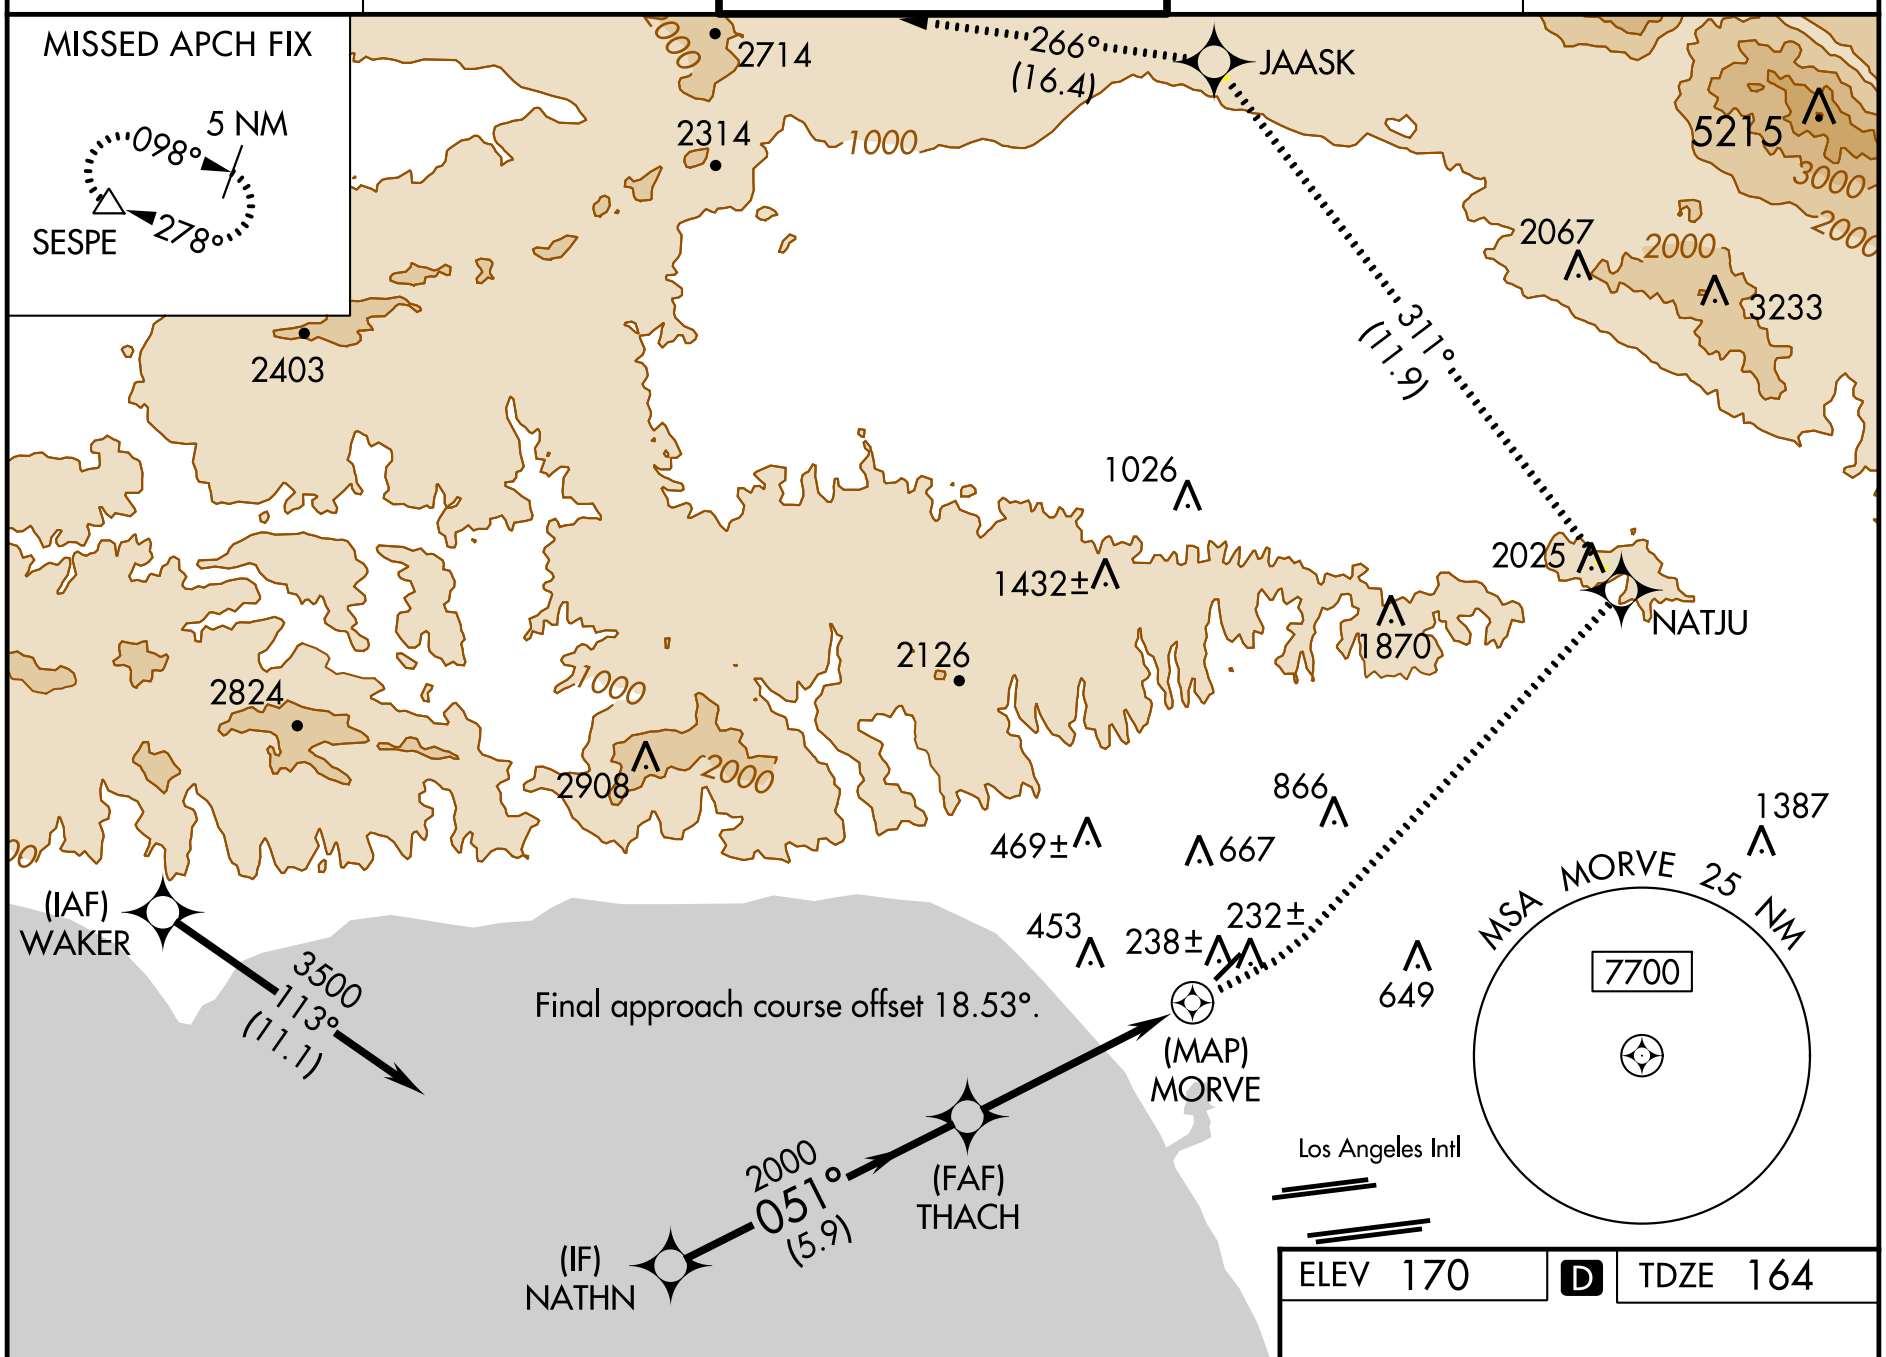

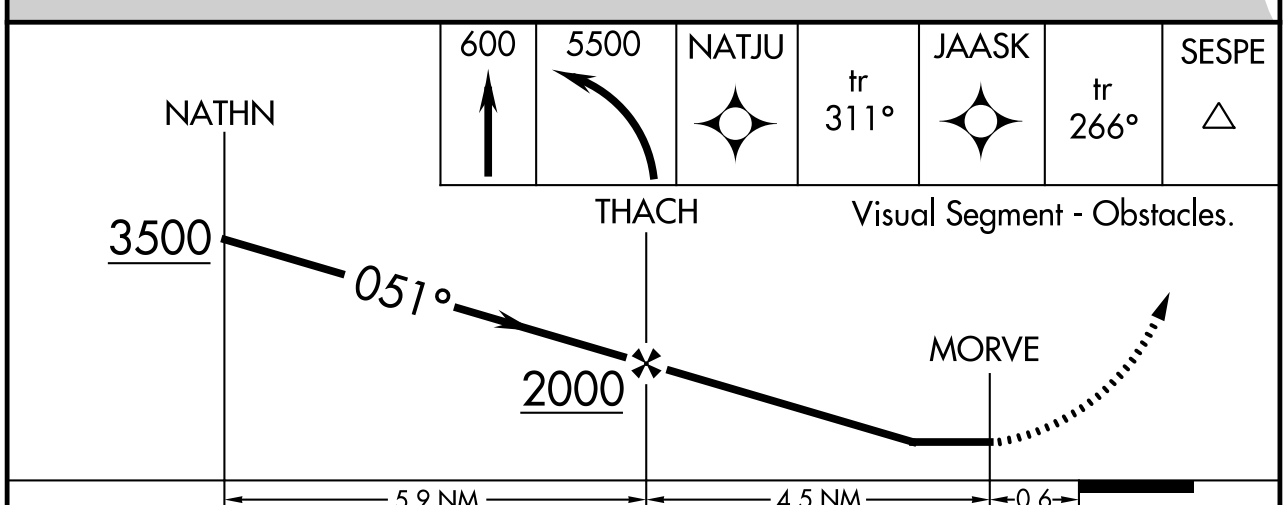

CATEGORY	A	B	C	D
LP MDA*	460-1 296 (300-1)			
LP MDA	920-1 756 (800-1)	920-1¼ 756 (800-1¼)	920-2½ 756 (800-2½)	
LNAV MDA*	500-1 336 (400-1)	500-1¼ 336 (400-1¼)	500-2½ 336 (400-2½)	
LNAV MDA	1020-1 856 (900-1)	1020-1¼ 856 (900-1¼)	1020-2½ 856 (900-2½)	

ELEV 170 D TDZE 164



MIRL Rwy 3-21 L
REIL Rwy 21 L

SW-3, 22 FEB 2024 to 21 MAR 2024

SW-3, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) Z RWY 3
SANTA MONICA MUNI (SMO)

WAAS CH 77839 W03B	APP CRS 062°	Rwy ldg 3500 TDZE 164 Apt Elev 170

Rwy 3 helicopter visibility reduction below 1 SM NA.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 600 then climbing left turn to 5000 direct DARTS and hold, do not exceed 175K when continuing climb-in-hold to 5000.
*Missed approach requires minimum climb of 290 feet per NM to 3800.

ATIS	SOCAL APP CON	SANTA MONICA TOWER★	GND CON	UNICOM
119.15	135.05 317.5	120.1 (CTAF) L 257.8	121.9	122.95

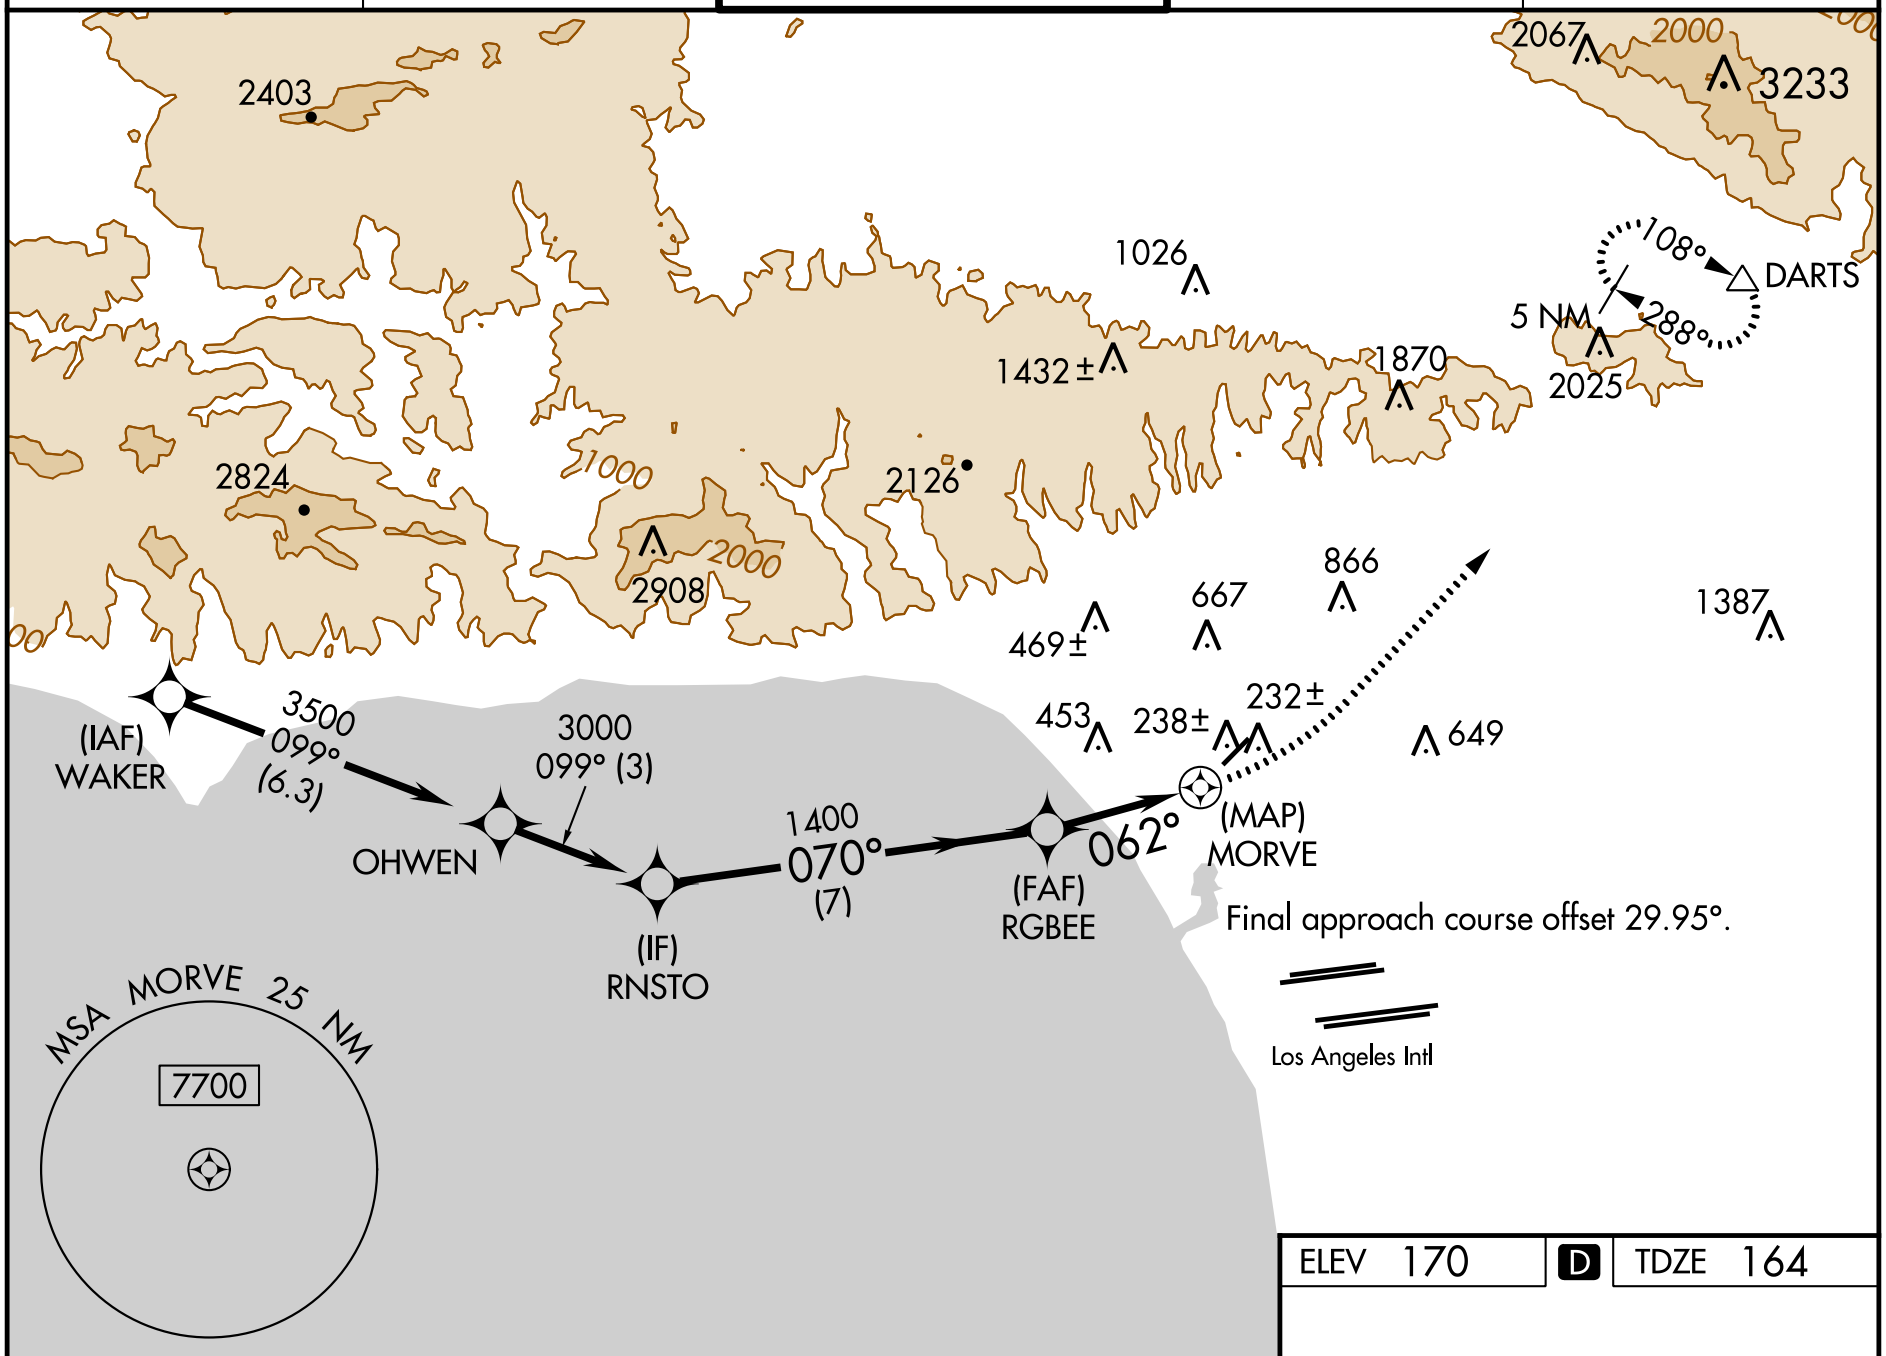

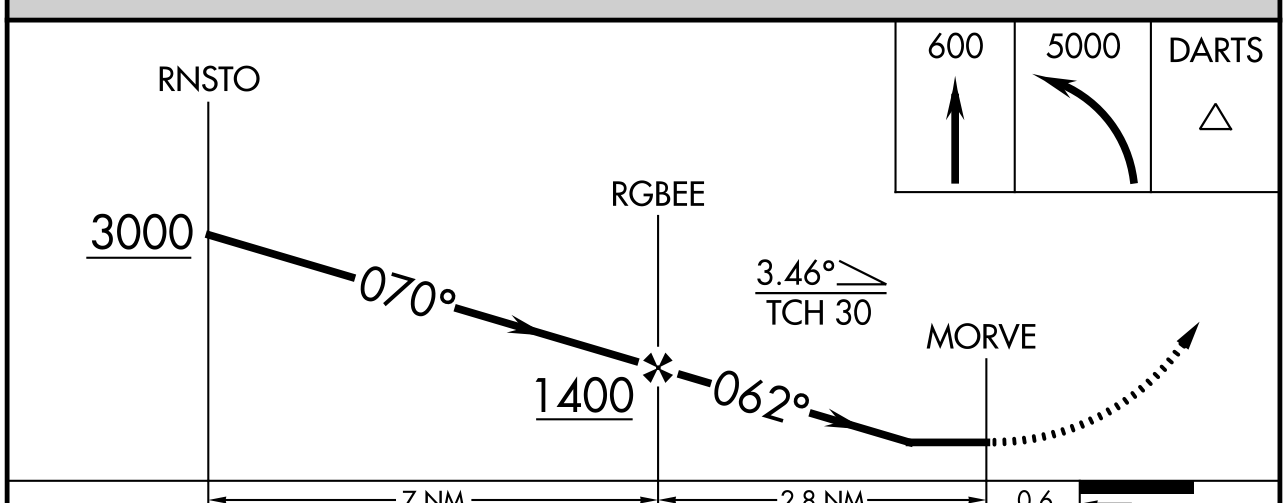

CATEGORY	A	B	C	D
LP MDA*	460-1 296 (300-1)		NA	
LP MDA	1260-1¼ 1096 (1100-1¼)	1260-1½ 1096 (1100-1½)	NA	
LNAV MDA*	500-1 336 (400-1)		NA	
LNAV MDA	1380-1¼ 1216 (1300-1¼)	1380-1½ 1216 (1300-1½)	NA	



MIRL Rwy 3-21 L
REIL Rwy 21 L

SW-3, 22 FEB 2024 to 21 MAR 2024

SW-3, 22 FEB 2024 to 21 MAR 2024

VOR/DME SMO 110.8 Chan 45	APP CRS 212°	Rwy ldg N/A TDZE N/A Apt Elev 170

VOR-A
SANTA MONICA MUNI (SMO)

T

A NA Circling NA northwest of Rwy 3-21.

MISSED APPROACH: Climb to 5000 on SMO VOR/DME R-250 and on FIM VORTAC R-148 to SADDE INT/19.9 DME and hold, continue climb-in-hold to 5000.

ATIS	SOCAL APP CON	SANTA MONICA TOWER ★	GND CON	UNICOM
119.15	135.05 317.5	120.1 (CTAF) L 257.8	121.9	122.95

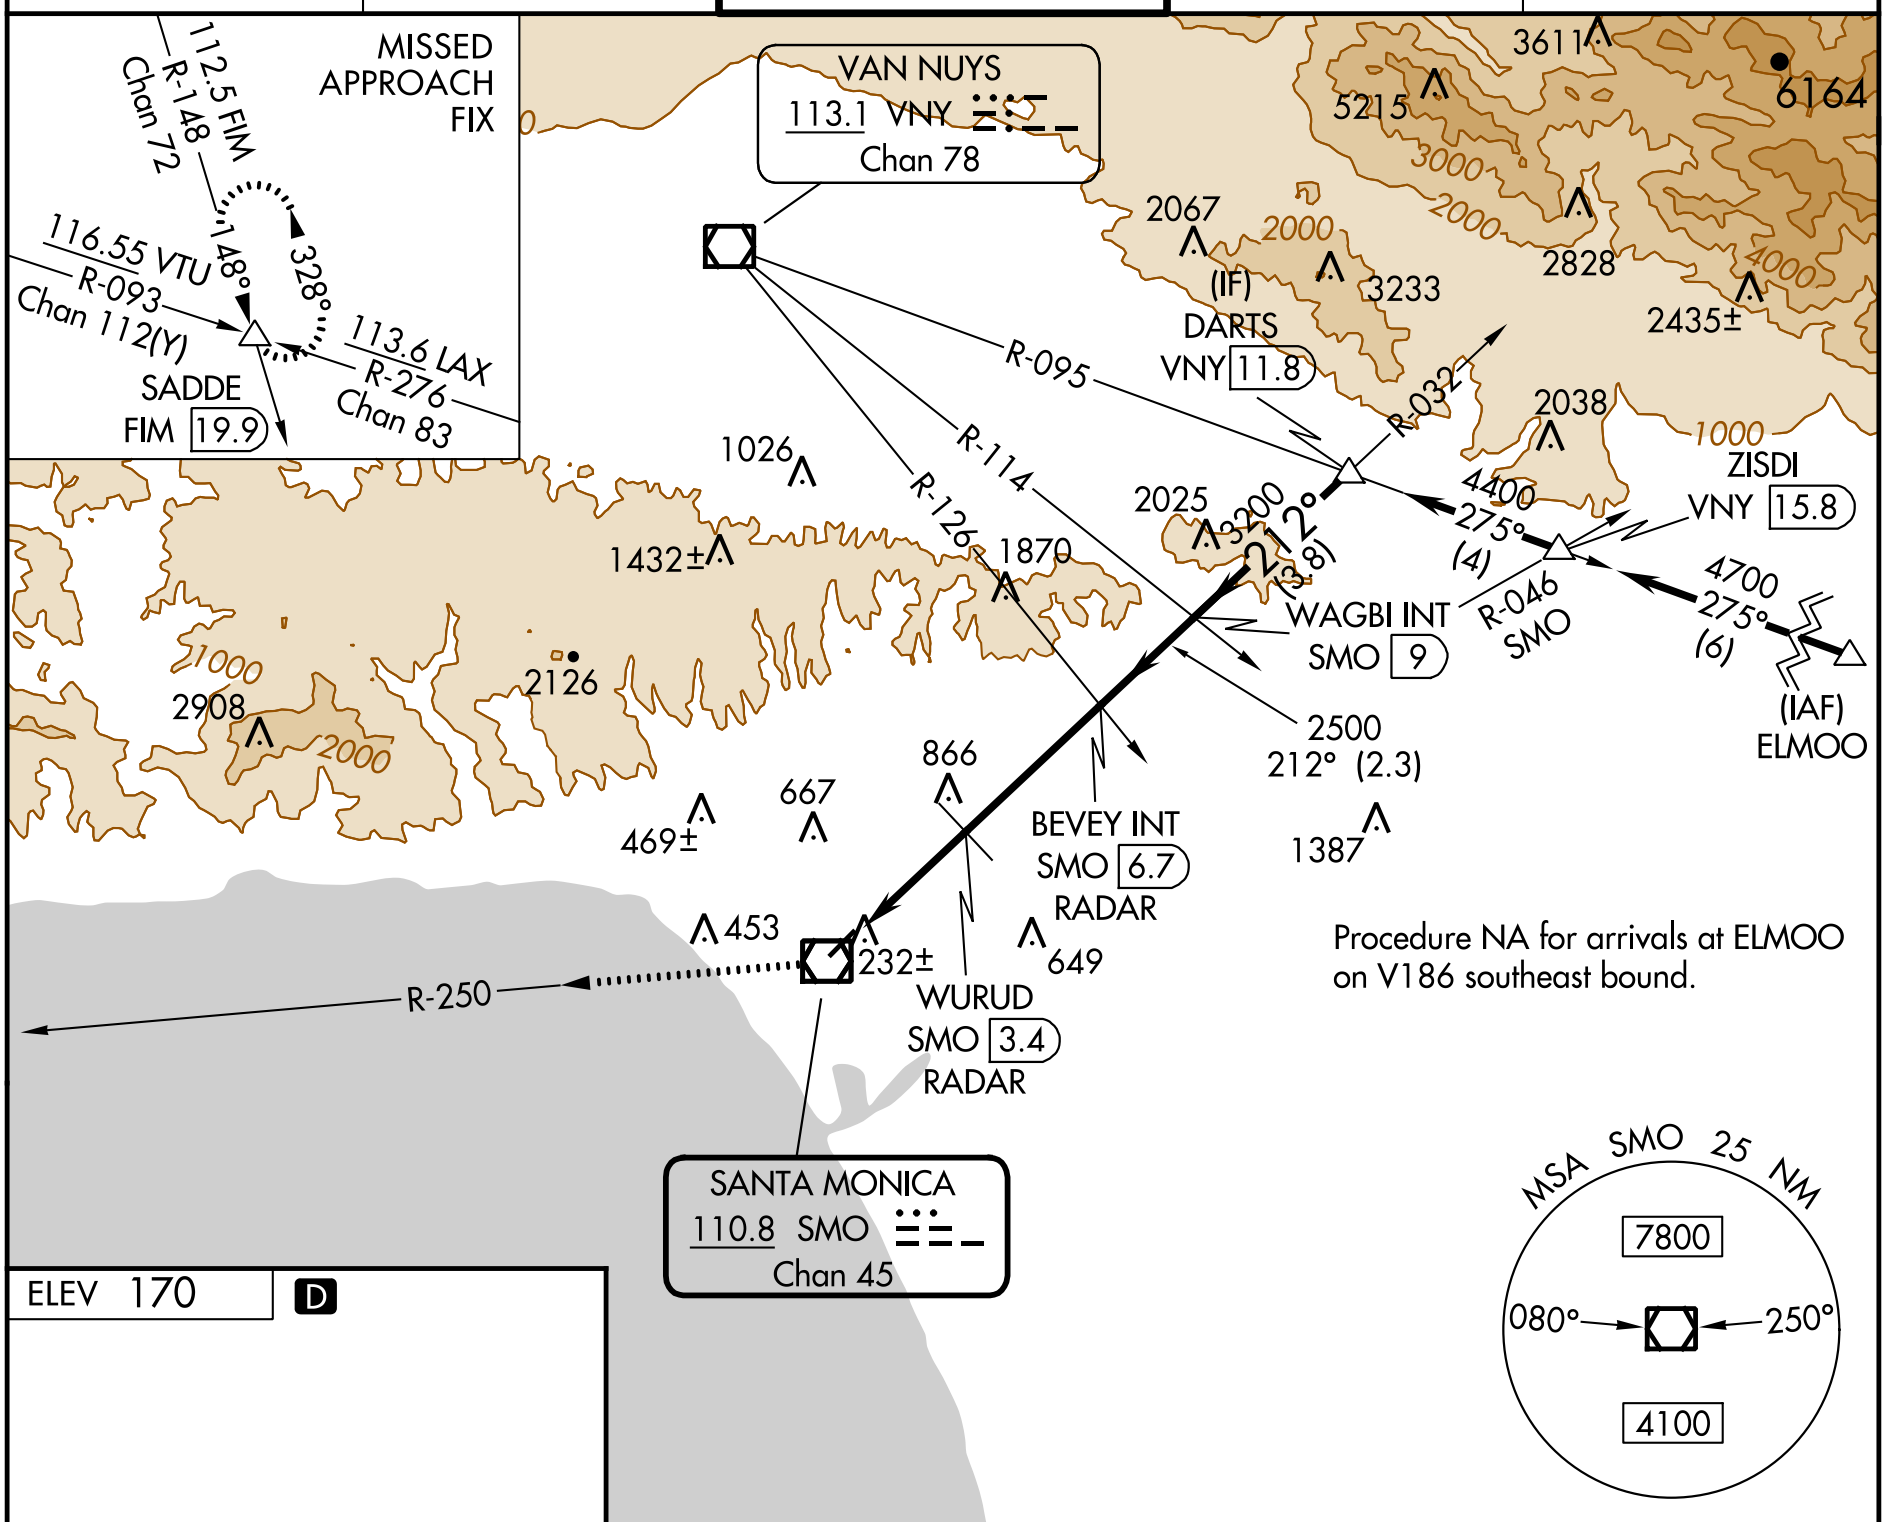

ELEV 170 D



MIRL Rwy 3-21 L
REIL Rwy 21 L

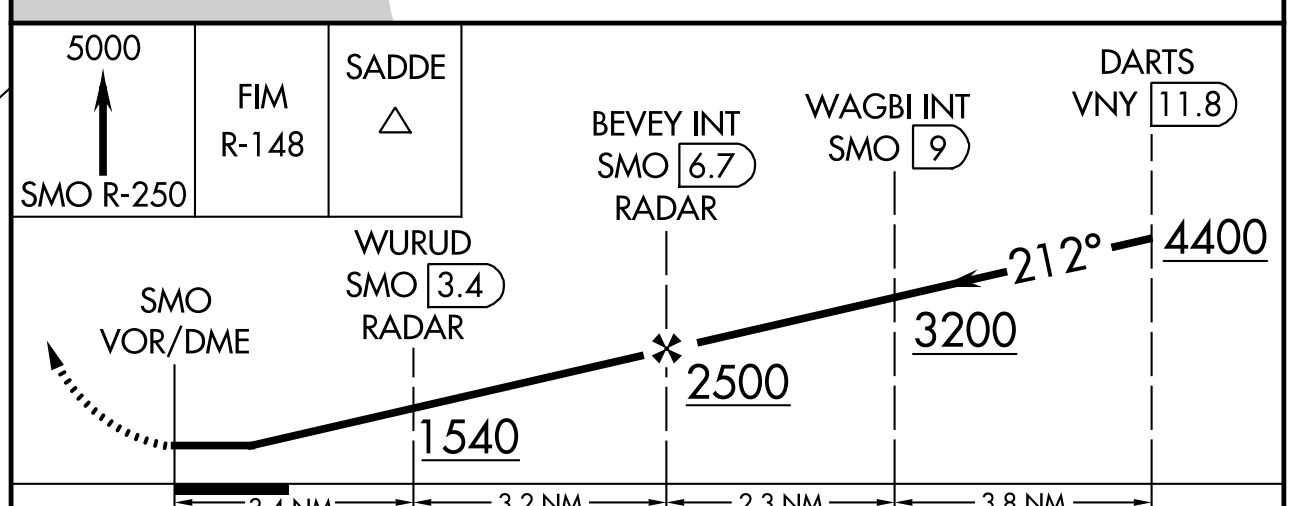

CATEGORY	A	B	C	D
C CIRCLING	1540-1¼ 1370 (1400-1¼)	1540-1½ 1370 (1400-1½)	1540-3 1370 (1400-3)	
WURUD FIX MINIMUMS				
C CIRCLING	1120-1¼ 950 (1000-1¼)		1180-3 1010 (1100-3)	

SW-3, 22 FEB 2024 to 21 MAR 2024

SW-3, 22 FEB 2024 to 21 MAR 2024